


FORCE USA

COMPACT LEG PRESS & HACK SQUAT

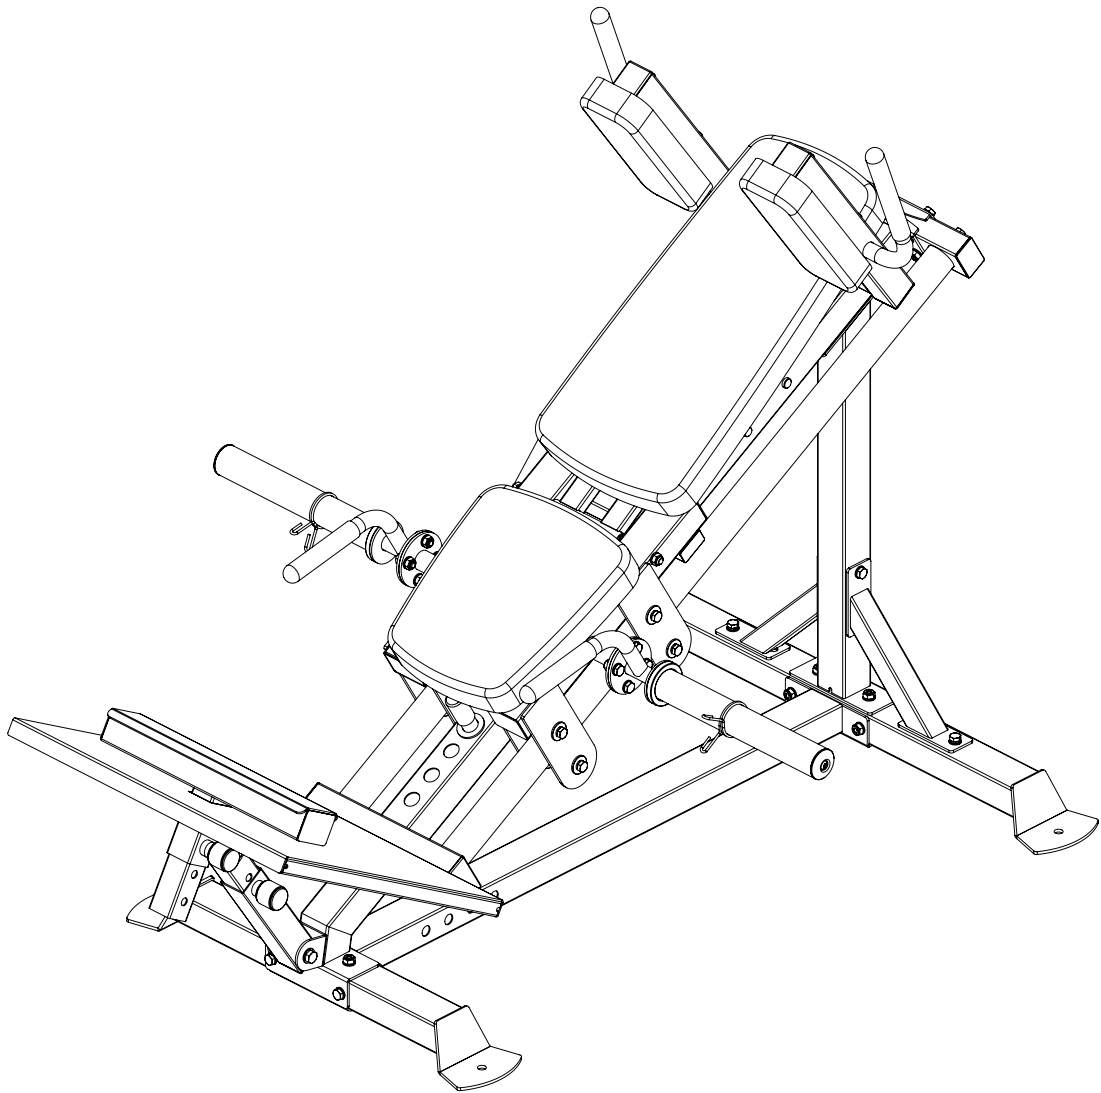

USER MANUAL | **F-CLP-V3**

TABLE OF CONTENTS

SECTION	PAGES
Before you Start and Safety Information	2
ForceUSA App	3
Preventative Maintenance	4
Part Identification	5-7
Assembly Steps	8-19
Exploded Diagrams	20-33
Parts Lists	34-36
Warranty Information	37

USER MANUAL

Before You Start

- Read all instructions in this manual before assembling or using this equipment
- Remove all parts from the packaging and count each component separately to ensure everything is provided correctly, noting that some items may be pre-assembled
- Follow the instructions and refer to both the individual assembly pages and the exploded views of the equipment whenever possible
- The owner is responsible for ensuring that all users of this unit have read the user manual and understand the safety precautions
- Descriptions of left and right refer to the perspective of standing in front of the equipment
- Place all parts in a cleared area and remove the packing materials. Do not dispose of the packing materials until all assembly steps are completed
- Machines with a counterbalanced smith bar require up to one meter of clearance above the assembled height to insert the counterbalances. If there is not enough clearance, insert the counterbalances into the required framing components before assembly and securely anchor off the cables to ensure they can be retrieved and attached as needed
- It is recommended to keep these instructions

Safety Precautions

- **IMPORTANT: Only tighten nuts and bolts loosely until all equipment is assembled. Once the equipment is fully assembled each bolt can be tightened working evenly around the equipment where possible**
- It is highly recommended that two or more people are used for assembly
- Assemble equipment on a flat surface
- Consider placing a mat/mats under the equipment to protect your floor
- Ensure all parts are in working order prior to use
- Make sure all pivoting components are able to move freely
- Do not use or store the equipment outdoors or around water
- Do not over tighten any component with pivoting function
- Keep hair, fingers and clothing away from moving parts
- Only use attachments recommended by the manufacturer
- Never operate if parts are not functioning correctly
- Always stretch prior to using equipment
- Stop immediately if you experience any pain, dizziness or nausea
- Before starting any exercise program consult your doctor

FORCE USA TRAINING APP

The Force USA training app offers programs, tutorials, progress tracking and more. Not compatible with all Force USA equipment.



PREVENTATIVE MAINTENANCE

To ensure your equipment is operating at its peak, please follow the below preventative maintenance schedule performing all tasks upon initial assembly:










Daily Maintenance

- Wipe down the equipment to remove any dust and sweat residue with a dry, non-abrasive cloth
- Inspect the unit for noisy, damaged or loose components










Monthly Maintenance

- Thoroughly clean the equipment using a non abrasive cloth dampened with a mild, all purpose cleaner ensuring to thoroughly wipe down and dry the equipment afterwards
- Apply a 100% silicone lubrication (preferably spray) to guide rods, pulley sliders, weight plate carriages and any other moving parts where friction can occur including bearings (where applicable). Any other form of lubrication will void your warranty
- Check the tightness of all bolts, nuts and screws
- Check the cables for fraying or any signs of wear and ensure they are at the correct tension with a small amount of slack at resting position (where applicable)
- Inspect pulleys for any damage or cracks (where applicable)
- Knurling can be cleaned using a soft bristled brush to help remove any particles that may be nestled within the knurling
- Vacuum around the machine/equipment to prevent dust acclimation







PARTS LIST

Key No.	Description	Quantity	Parts Schematic Diagram
1	Rear Base Frame	1	
2	Base Linking Frame	1	
3	Front Base Frame	1	
4	Rear Support Frame	1	
5	Centre Frame	1	
12	Guide Rod	2	
13	Guide Rod Locking Frame	1	
14	U-shaped Plate	1	
15	Sliding Carriage	1	


PARTS LIST

Key No.	Description	Quantity	Parts Schematic Diagram
19	Lock Pin	1	
20	Angled Support Frame	2	
21	Adjustment Outer Frame	2	
24	Footplate Adjustment Inner Frame	1	
28	Footplate	1	
29	Back Pad Frame	1	
30	Back Pad Adjustment Inner Frame	1	
32	Back Pad	1	
33	Seat Pad	1	

PARTS LIST


Key No.	Description	Quantity	Parts Schematic Diagram
34	Calf Raise Frame	1	
38	Handle and Weight Plate Sleeve - Right	1	
39	Handle and Weight Plate Sleeve - Left	1	
40	Shoulder Pad Frame	1	
41	Shoulder Pad	2	
42	Olympic Spring Collar	2	

ASSEMBLY STEP 1

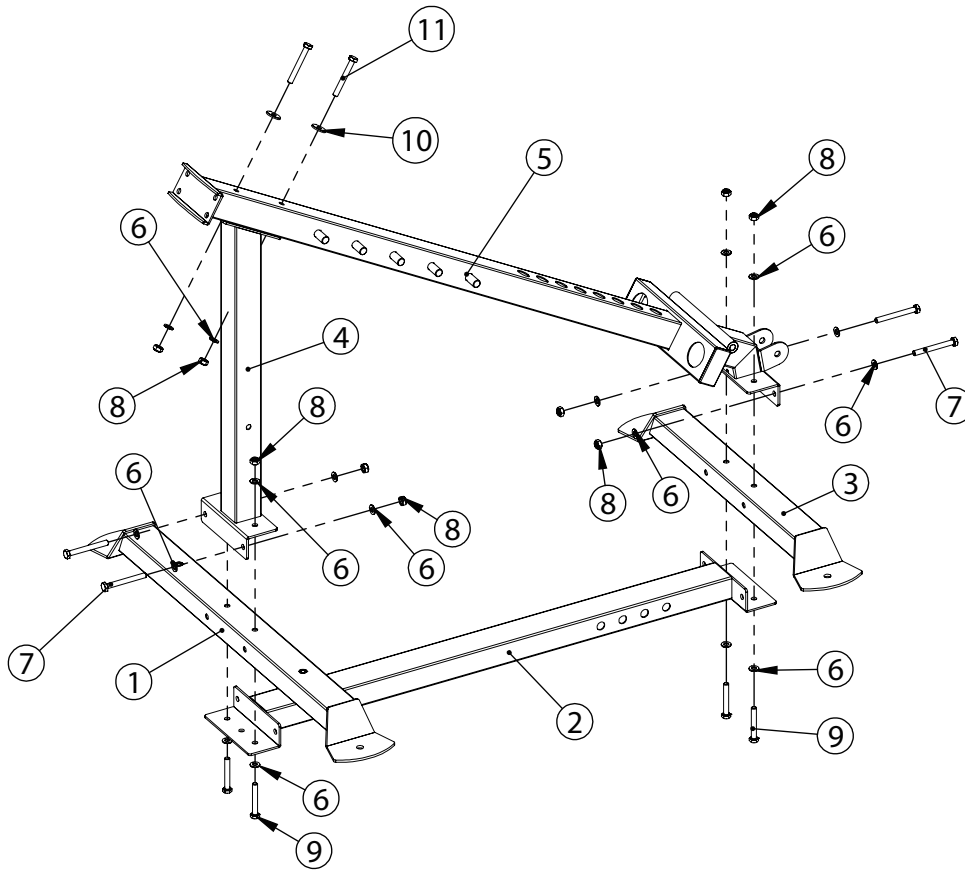

Key No.	Description	Note	Quantity
1	Rear Base Frame		1
2	Base Linking Frame		1
3	Front Base Frame		1
4	Rear Support Frame		1
5	Centre Frame		1
6	Flat Washer	φ10	18
7	Hexagonal Head Bolt	M10×90	4
8	Lock Nut	M10	10
9	Hexagonal Head Bolt	M10×70	4
10	Large Flat Washer	φ30*φ10*3	2
11	Hexagonal Head Bolt	M10×80	2

ASSEMBLY DRAWING

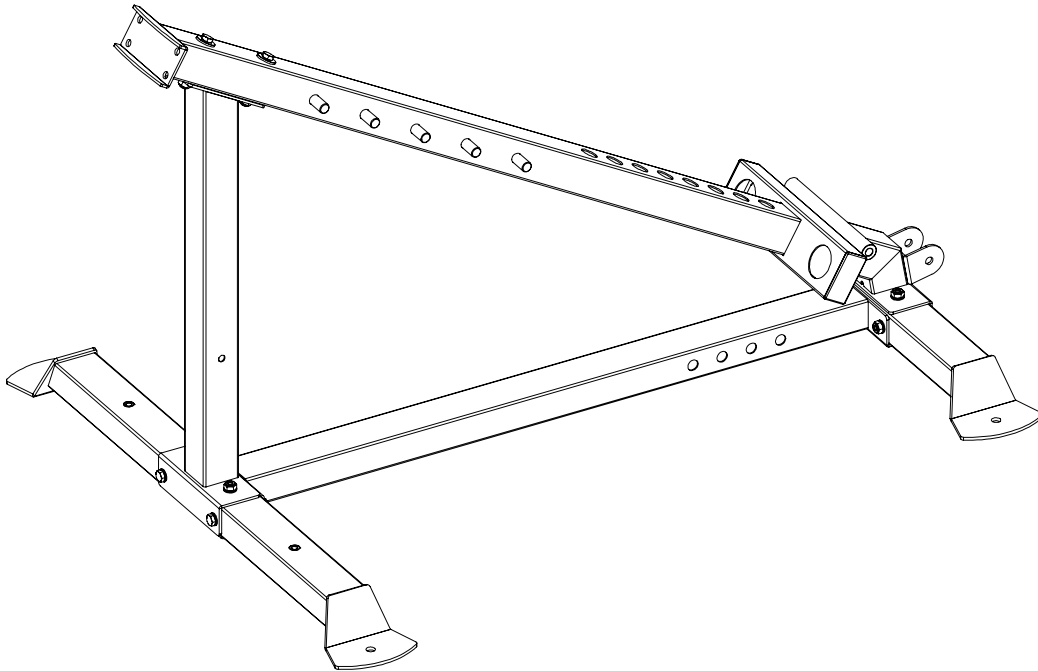


1- Place a Flat Washer (M10)(#6) and Hexagonal Head Bolt (M10*70)(#9) through the Base Linking Frame (#2) from the underside in the holes at each end of the frame (4 in total).

2- Place Rear Base Frame (#1) and Front Base Frame (#3) over the bolts on Base Linking Frame (#2) ensuring the front and back are correct by ensuring the holes on the centre piece of the Base Linking Frame (#2) are at the front end (closest to Front Base Frame (#3)).

3- Place Rear Support Frame (#4) on top of Rear Base Frame (#1) and attach the pieces together using 1 x Flat Washer (M10)(#6) and 1 x Lock Nut (M10)(#8) on the vertical holes and 2 x Flat Washer (M10)(#6), 1 x Hexagonal Head Bolt (M10*90)(#7) and 1 x Lock Nut (M10)(#8) on the horizontal holes.


4- Place Centre Frame(#5) onto Front Base Frame (#3) and Rear Support Frame (#4) and connect to the assembled frame using 2 x Flat Washer (M10)(#6), 2 x Lock Nut (M10)(#8), 2 x Large Flat Washer (M10)(#10) and 2 x Hexagonal Head Bolt (M10*80) (#11) to connect to the Rear Support Frame (#4). To connect parts Base Linking Frame (#2), Front Base Frame (#3) and Centre Frame(#5) use 2 x Flat Washer (M10) (#6), 1 x Hexagonal Head Bolt (M10*90)(#7) and 1 x Lock Nut (M10)(#8) on the horizontal holes and 1 x Flat Washer (M10)(#6) and 1 x Lock Nut (M10)(#8) for each vertical hole connecting to the bolts that were inserted through part 2.

ASSEMBLY STEP 2

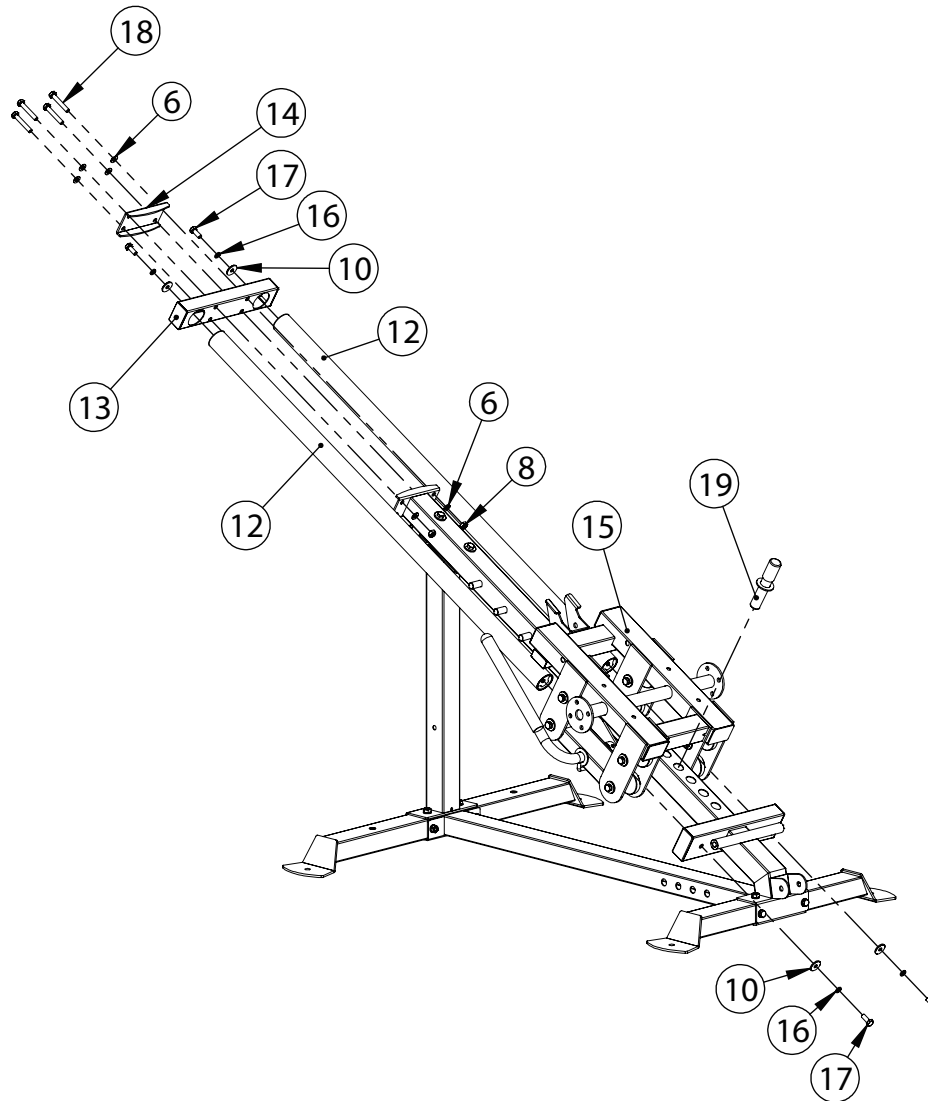

Key No.	Description	Note	Quantity
6	Flat Washer	φ10	8
8	Lock Nut	M10	4
10	Large Flat Washer	φ30*φ10*3	4
12	Guide Rod		2
13	Guide Rod Locking Frame		1
14	U-shaped Plate	T4	1
15	Sliding Carriage		1
16	Spring Washer	φ10	4
17	Hexagonal Head Bolt	M10×25	4
18	Hexagonal Head Bolt	M10×60	4
19	Lock Pin		1

ASSEMBLY DRAWING

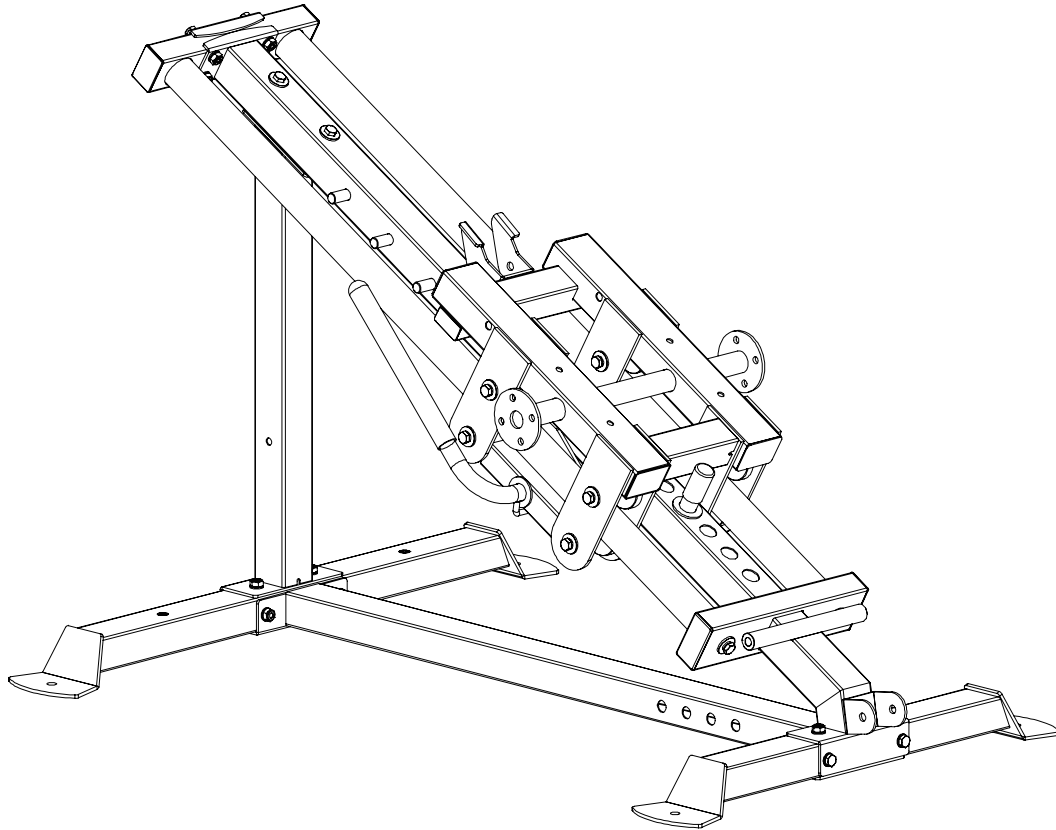


1- Insert Lock Pin(#19) into the assembled frame as shown in the graphic.

2- Carefully place the Sliding Carriage(#15) onto the assembled frame and then feed through a Guide Rod(#12) on each side between the rollers and into the holes on the Centre Frame(#5). Connect the bottom of the guide rods to the assembled frame using 1 x Large Flat Washer (M10)(#10), 1 x Spring Washer (M10)(#16) and 1 x Hexagonal Head Bolt (M10*25)(#17).


3- Connect Guide Rod Locking Frame (#13) to the guide rods using 1 x Large Flat Washer (M10)(#10), 1 x Spring Washer (M10)(#16) and 1 x Hexagonal Head Bolt (M10*25)(#17) for each guide rod and then connect a U-shaped Plate (#14) to the assembled frame using 1 x Flat Washer (M10)(#6) and 1 x Hexagonal Head Bolt (M10*60)(#18) per hole.

ASSEMBLY STEP 3

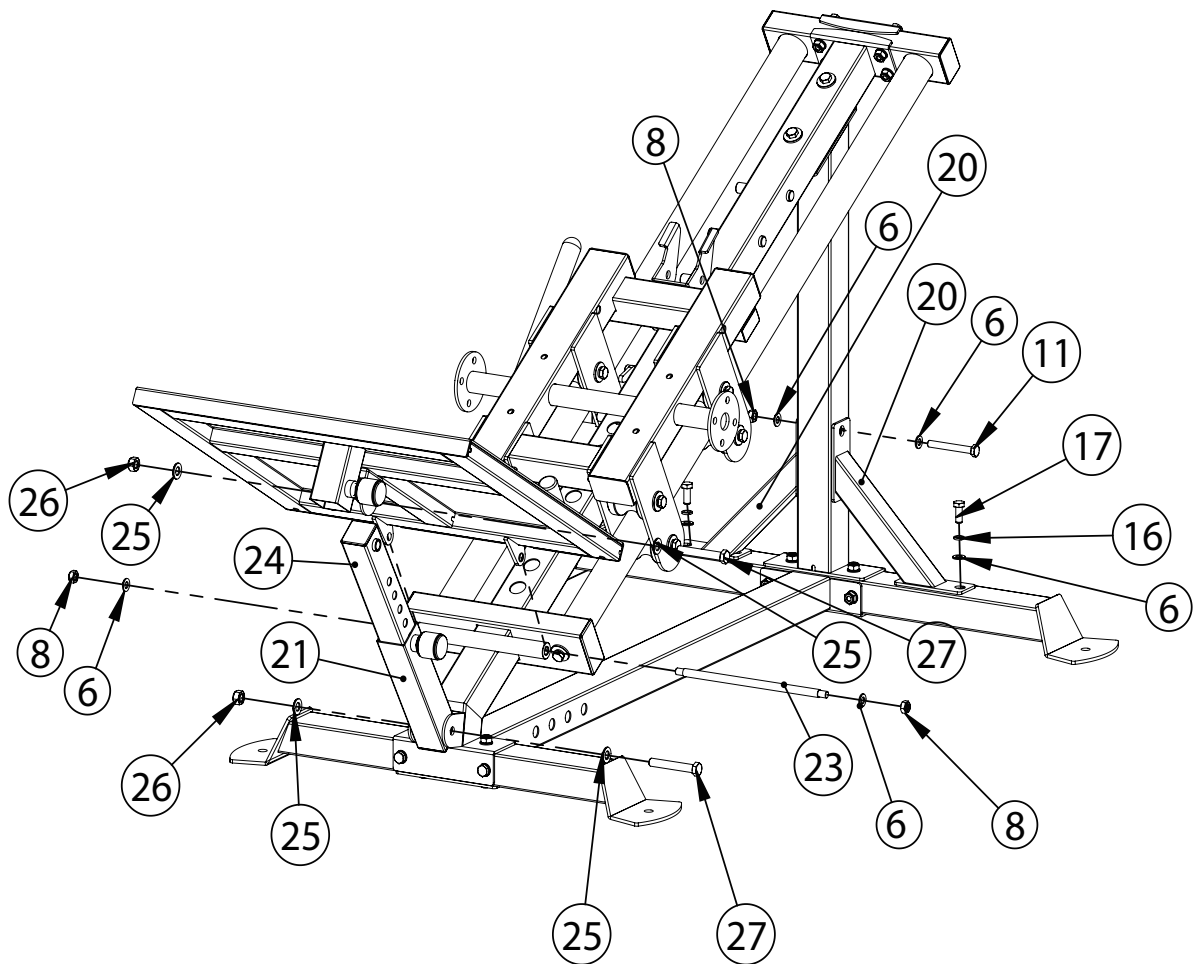

Key No.	Description	Note	Quantity
6	Flat Washer	$\phi 10$	6
8	Lock Nut	M10	3
11	Hexagonal Head Bolt	M10×80	1
16	Spring Washer	$\phi 10$	2
17	Hexagonal Head Bolt	M10×25	2
20	Angled Support Frame		2
21	Adjustment Outer Frame		1
23	Double Head Bolt	$\phi 12 \times 270 - M10$	1
24	Footplate Adjustment Inner Frame		1
25	Flat Washer	$\phi 12$	4
26	Lock Nut	M12	2
27	Hexagonal Head Bolt	M12×80	2
28	Footplate		1

ASSEMBLY DRAWING

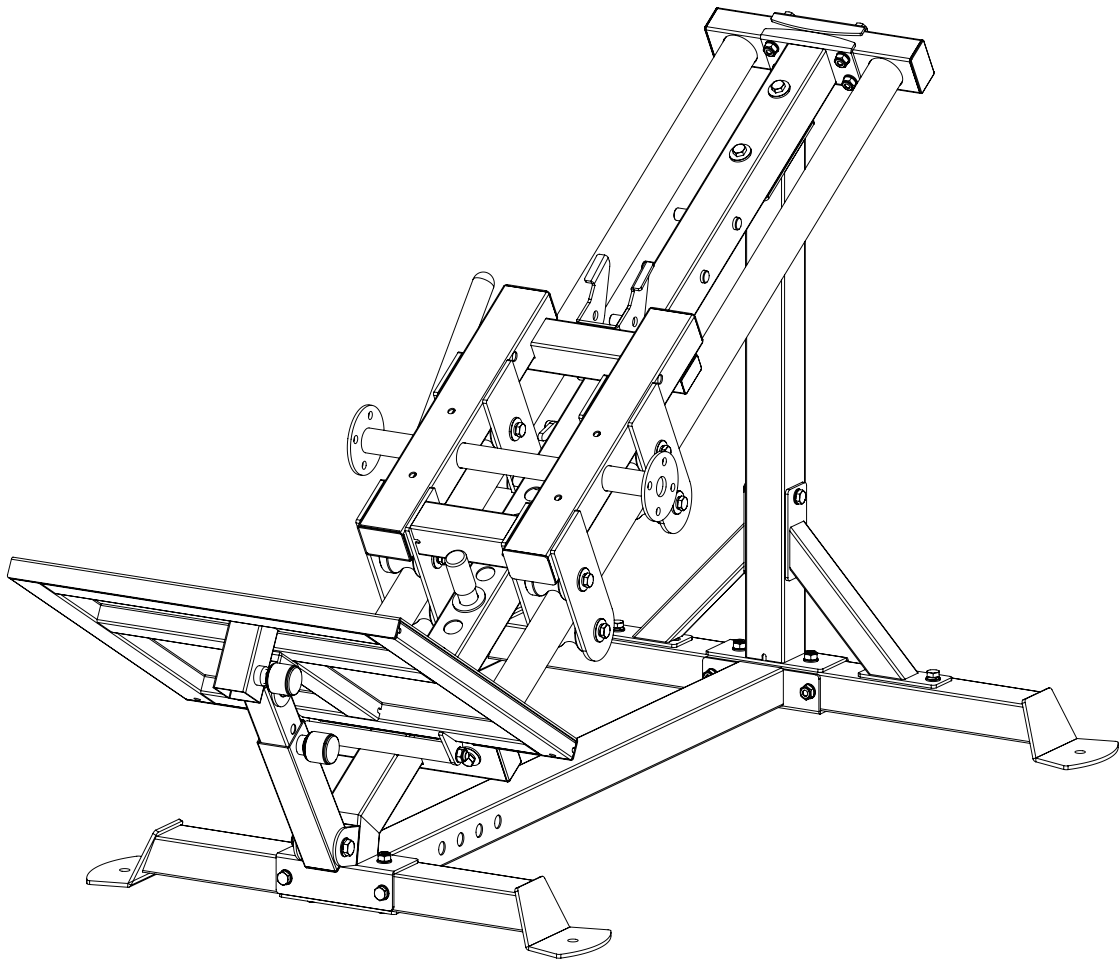


1- Connect the 2 x Angled Support Frames(#20) to the rear of the assembled frame using 1 x Flat Washer (M10)(#6), 1 x Spring Washer (M10)(#16) and 1 x Hexagonal Head Bolt (M10*25) (#17) for each vertical hole and 2 x Flat Washer (M10)(#6), 1 x Lock Nut (M10)(#8) and 1 x Hexagonal Head Bolt (M10*80)(#11) for the horizontal hole.

2- Attach the Footplate(#28) to the assembled frame by lining up the two eyelet holes with the long tube near the base of the guide rods and inserting Double Head Bolt M10*270) (#23) through both the eyelet holes and the tube. Connect the pieces by using 1 x Flat Washer (M10)(#6), 1 x Lock Nut (M10)(#8) on each end.

3- Attach the Footplate Adjustment Inner Frame (#24) to the Footplate (#28) using 2 x Flat Washer (M12)(#25), 1 x Lock Nut(M12)(#26) and 1 x Hexagonal Head Bolt (M12*80)(#27).


4- Insert the Footplate Adjustment Inner Frame (#24) into Adjustment Outer Frame (#21) and then attach the Adjustment Outer Frame(#21) to the main frame using 2 x Flat Washer (M12)(#25), 1 x Lock Nut(M12)(#26) and 1 x Hexagonal Head Bolt (M12*80)(#27).

ASSEMBLY STEP 4

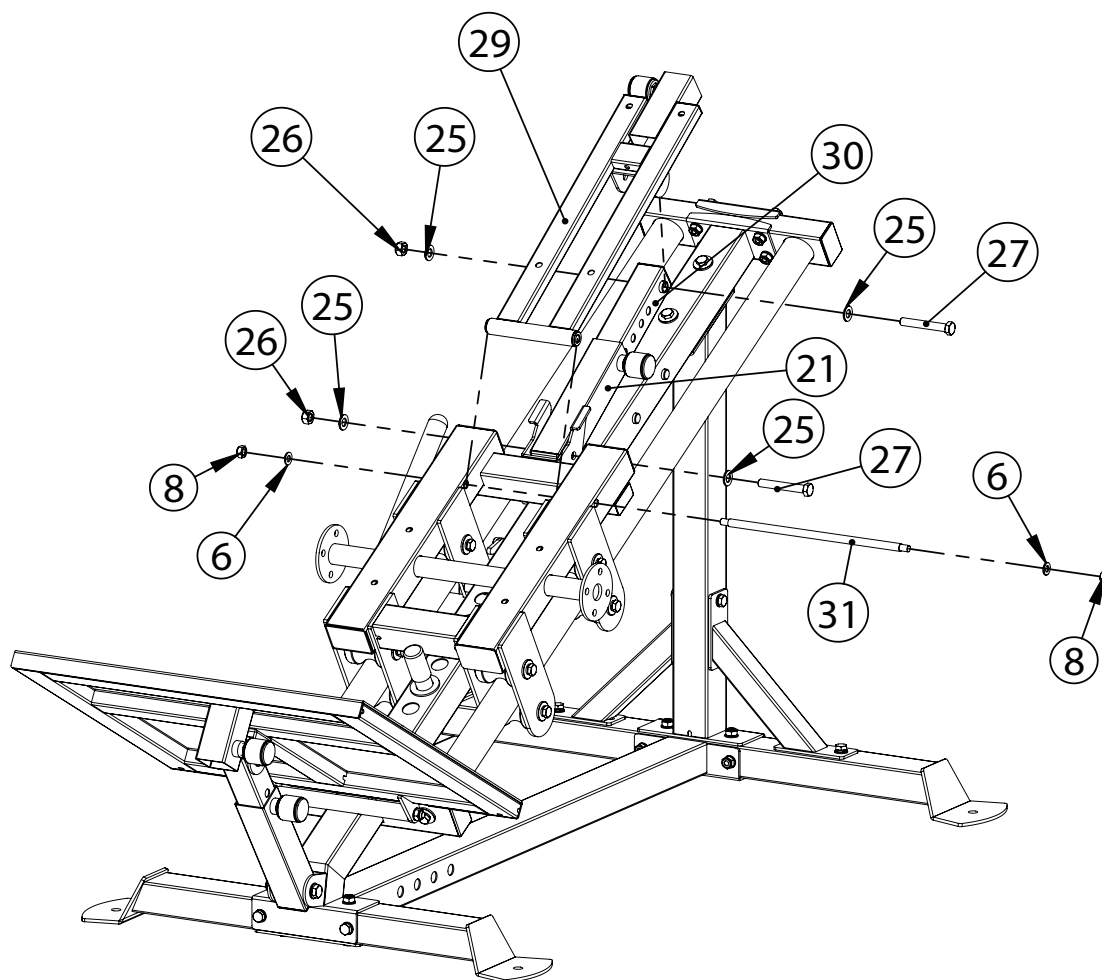

Key No.	Description	Note	Quantity
6	Flat Washer	φ10	2
8	Lock Nut	M10	2
21	Adjustment Outer Frame		1
25	Flat Washer	φ12	4
26	Lock Nut	M12	2
27	Hexagonal Head Bolt	M12×80	2
29	Back Pad Frame		1
30	Back Pad Adjusting Inner Frame		1
31	Double Head Bolt	φ12×323-M10	1

ASSEMBLY DRAWING

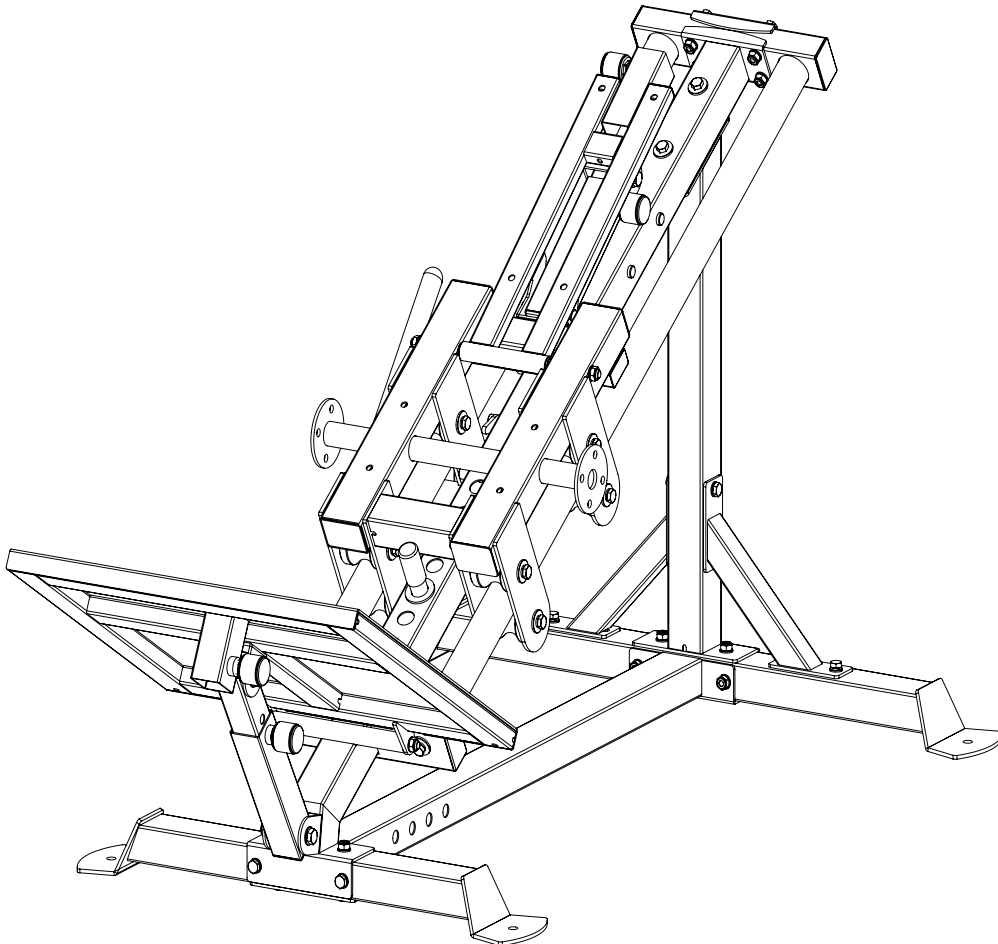


1- Attach the Adjustment Outer Frame (#21) to the assembled frame in the position shown using 2 x Flat Washer (M12)(#25), 1 x Lock Nut(M12)(#26) and 1 x Hexagonal Head Bolt (M12*80)(#27).

2- Attach the Back Pad Frame (#29) to the assembled main frame using 2 x Flat Washer (M10)(#6), 2 x Lock Nut (M10)(#8) and 1 x Double Head Bolt (M10*323)(#31).


3- Insert the Back Pad Adjustment Inner Frame into the Adjustment Outer Frame (#21) and then connect the Back Pad Frame (#29) and the Back Pad Adjustment Inner Frame (#30) together using 2 x Flat Washer (M12)(#25), 1 x Lock Nut(M12)(#26) and 1 x Hexagonal Head Bolt (M12*80)(#27).

ASSEMBLY STEP 5

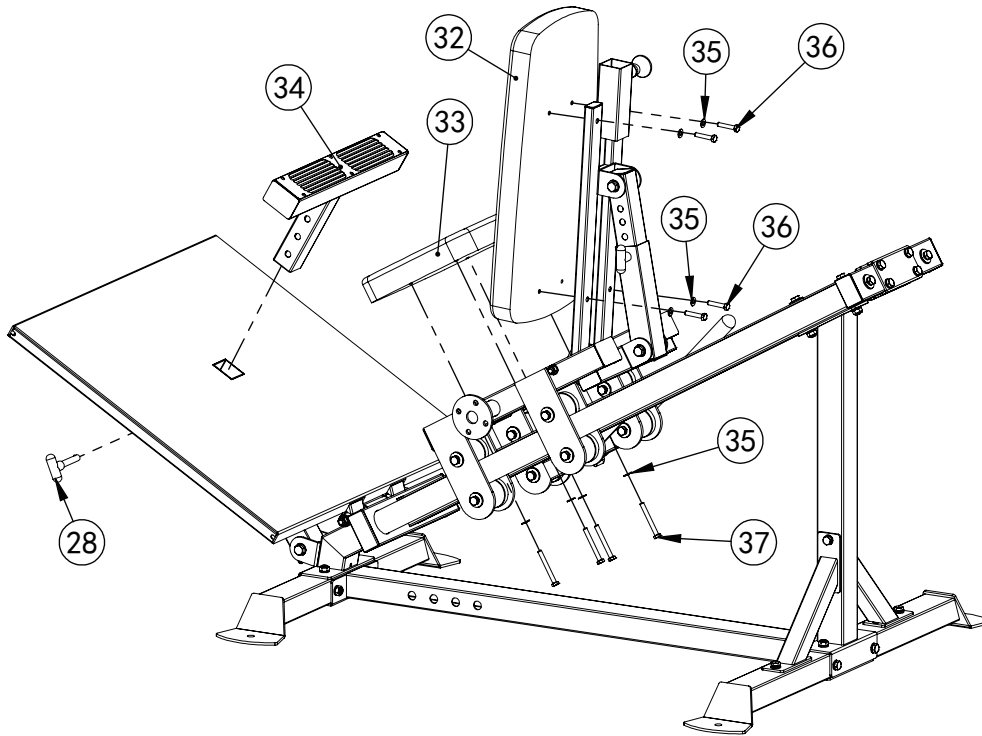

Key No.	Description	Note	Quantity
28	Foot Plate		1
32	Back Pad		1
33	Seat Pad		1
34	Calf Raise Frame		1
35	Flat Washer	φ8	8
36	Hexagonal Head Bolt	M8×40	4
37	Hexagonal Head Bolt	M8×70	4

ASSEMBLY DRAWING

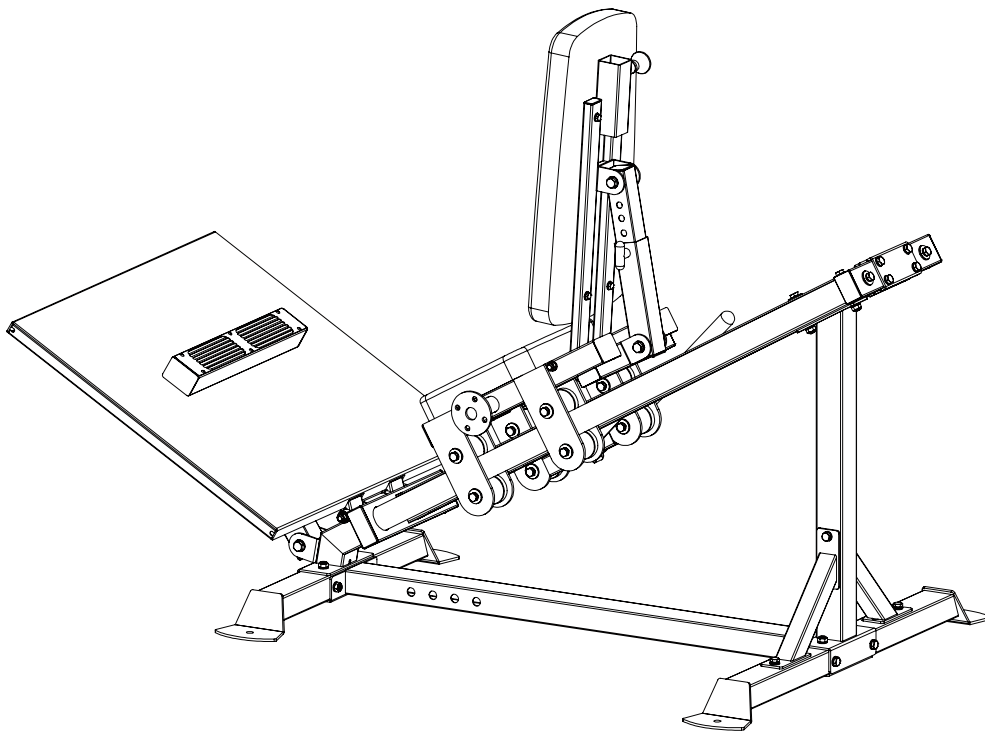


1- Insert the Calf Raise Frame (#34) into the Footplate(#28) using the pop pin to lock it in place.

2- Attach the Back Pad(#32) to the frame using 1 x Flat Washer(M8)(#35) and 1 x Hexagonal Head Bolt(M8*40)(#36).


3- Attach the Seat Pad (#33) to the frame using 1 x Flat Washer(M8)(#35) and 1 x Hexagonal Head Bolt(M8*70)(#37) per hole.

ASSEMBLY STEP 6

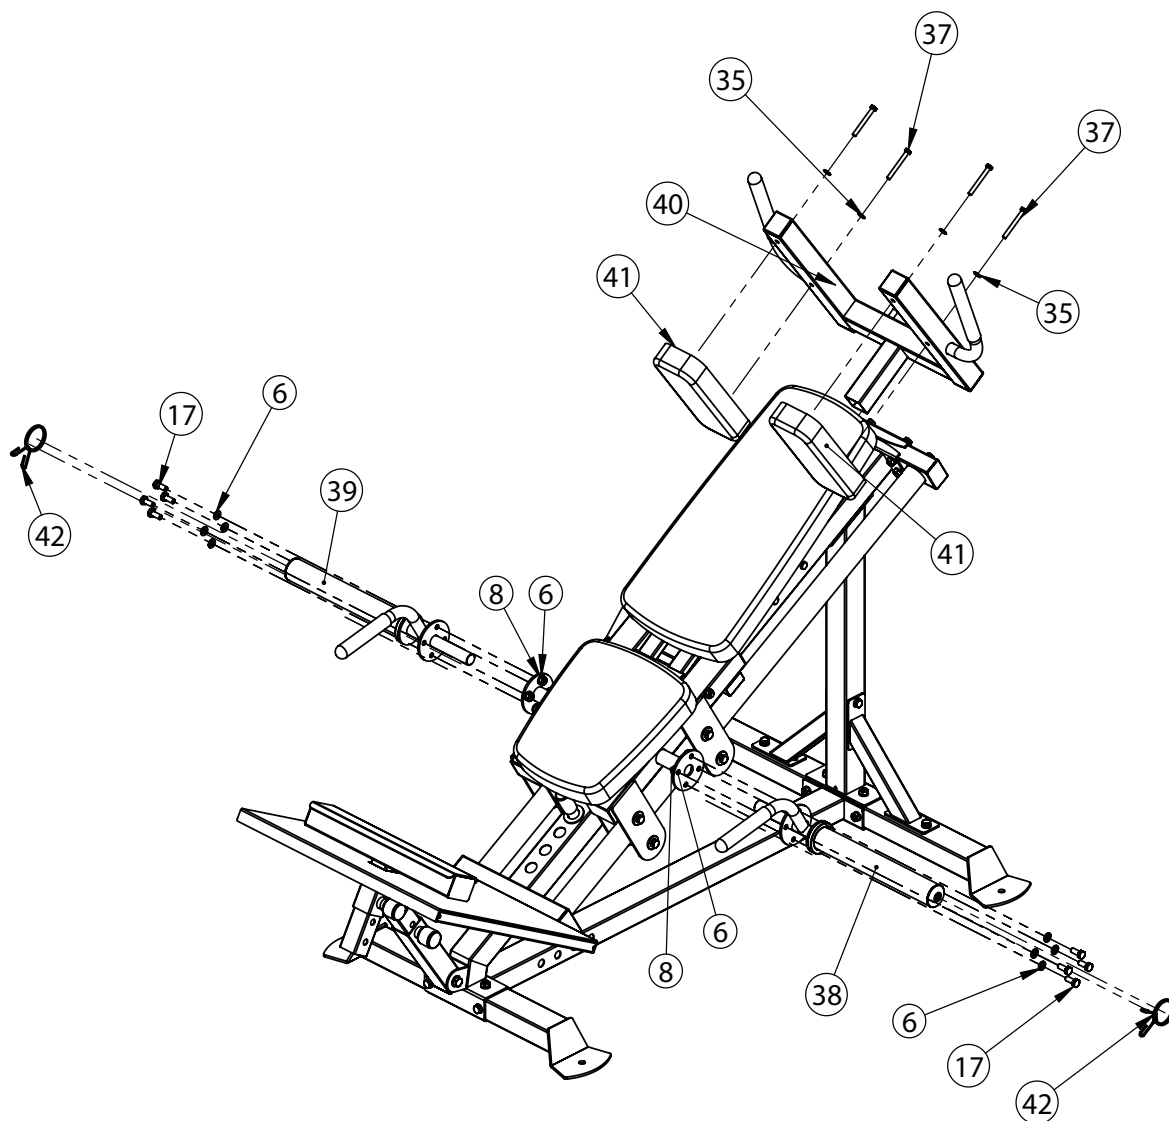

Key No.	Description	Note	Quantity
6	Flat Washer	φ10	16
8	Lock Nut	M10	8
17	Hexagonal Head Bolt	M10×25	8
35	Flat Washer	φ8	4
37	Hexagonal Head Bolt	M8×70	4
38	Handle and Weight Plate Sleeve - Right		1
39	Handle and Weight Plate Sleeve - Left		1
40	Shoulder Pad Frame		1
41	Shoulder Pad		2
42	Olympic Spring Collar	φ50	2

ASSEMBLY DRAWING

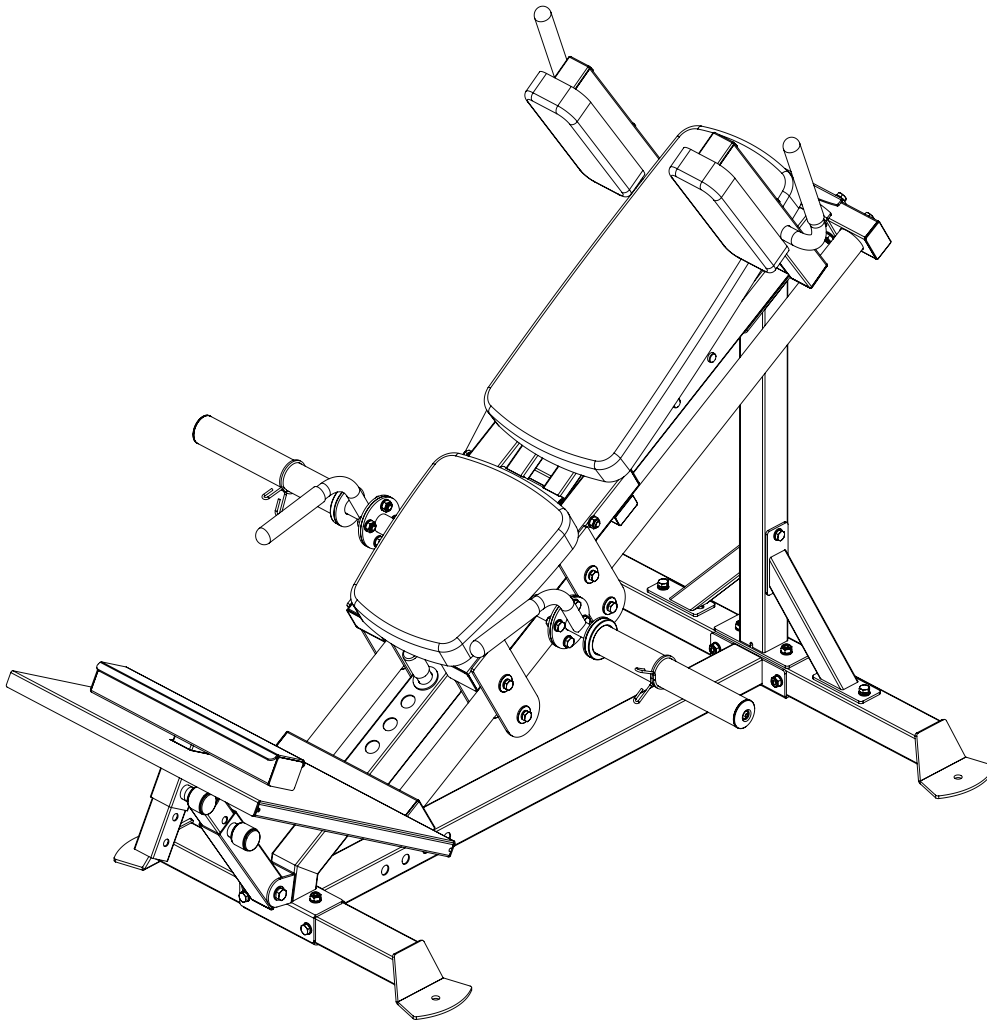

1- Attach the 2 Shoulder Pads (#41) to the Shoulder Pad Frame(#40) using 1 x Flat Washer(M8)(#35) and 1 x Hexagonal Head Bolt(M8*70)(#37) per hole.


2- Connect the Handle and Weight Plate Sleeve - Right (#38) to the frame using 2 x Flat Washer (M10)(#6), 1 x Lock Nut (M10)(#8) and 1 x Hexagonal Head Bolt (M10*25)(#17) per hole.

3- Repeat the above for the opposite side using the Handle and Weight Plate Sleeve - Left (#39).

4- Attach 1 Olympic Spring Collar (#42) to each side.

EXPLODED DIAGRAM


(5) Centre Frame, 1 pc/ set

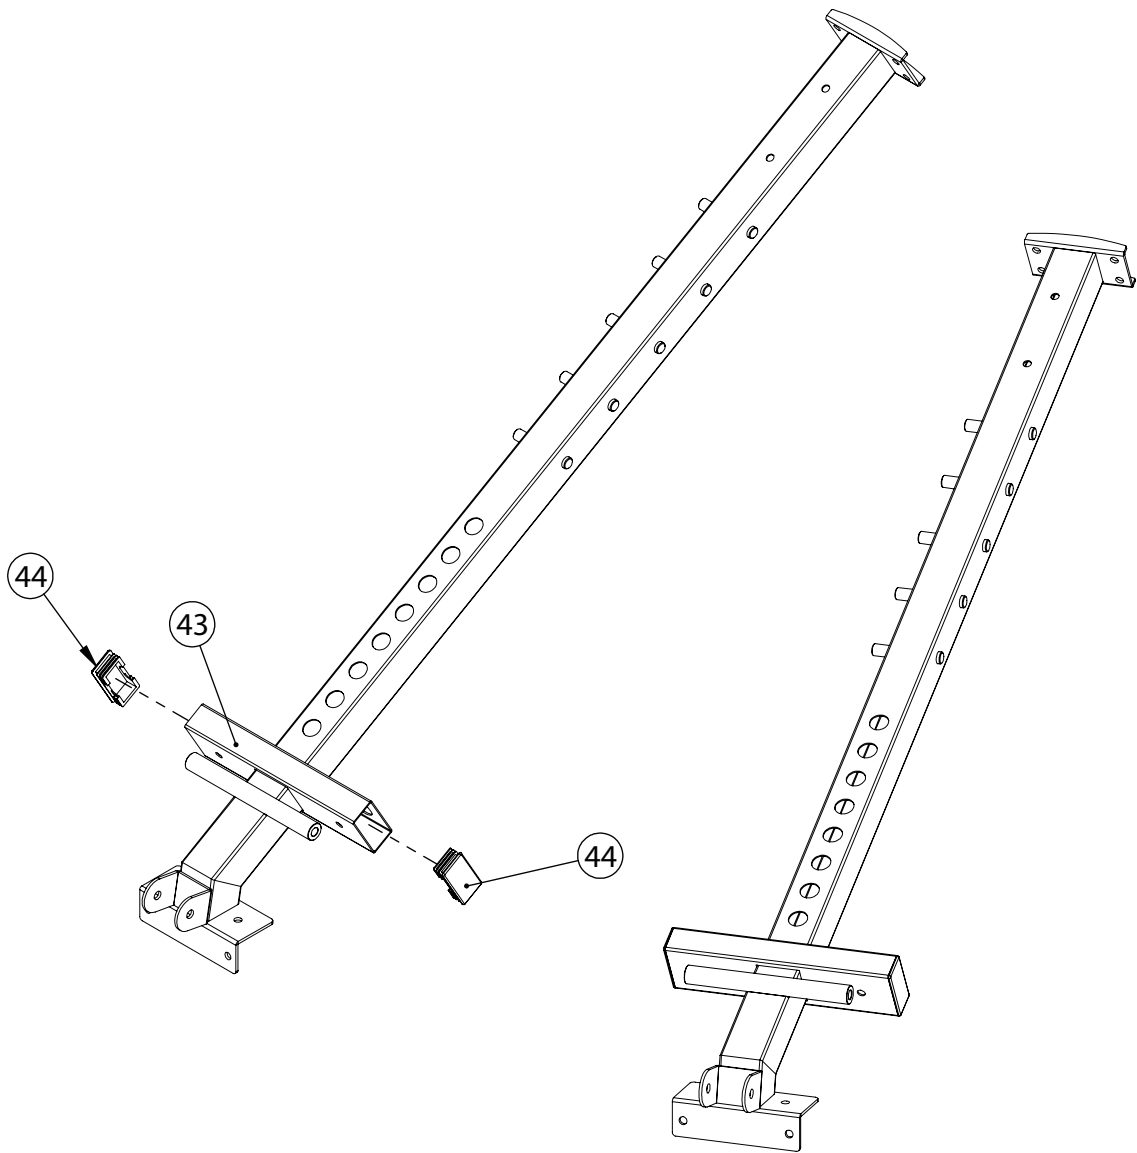

Key No.	Description	Note	Quantity
43	Centre Frame Tube		1
44	End Cap	□40×80×2	2

EXPLODED DIAGRAM


(12) Guide Rod, 2 pcs/ set

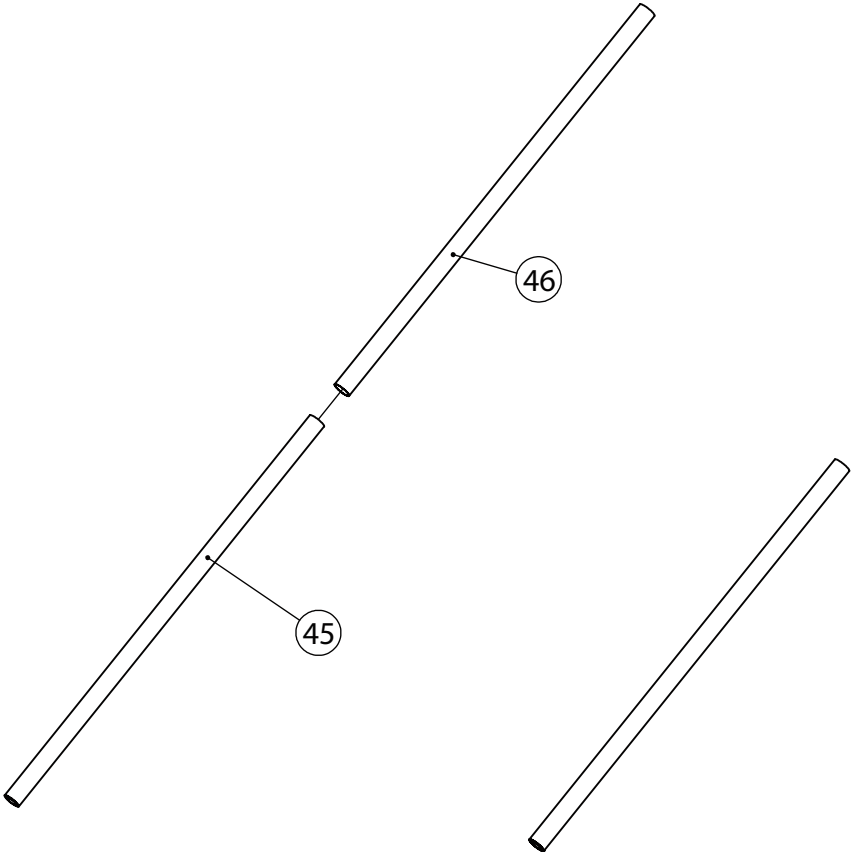

Key No.	Description	Note	Quantity
45	Guide Rod Inner Tube		1
46	Guide Rod Outer Tube	$\phi 49.5 \times 0.6$	1

EXPLODED DIAGRAM


(13) Guide Rod Locking Frame, 1 pc/ set

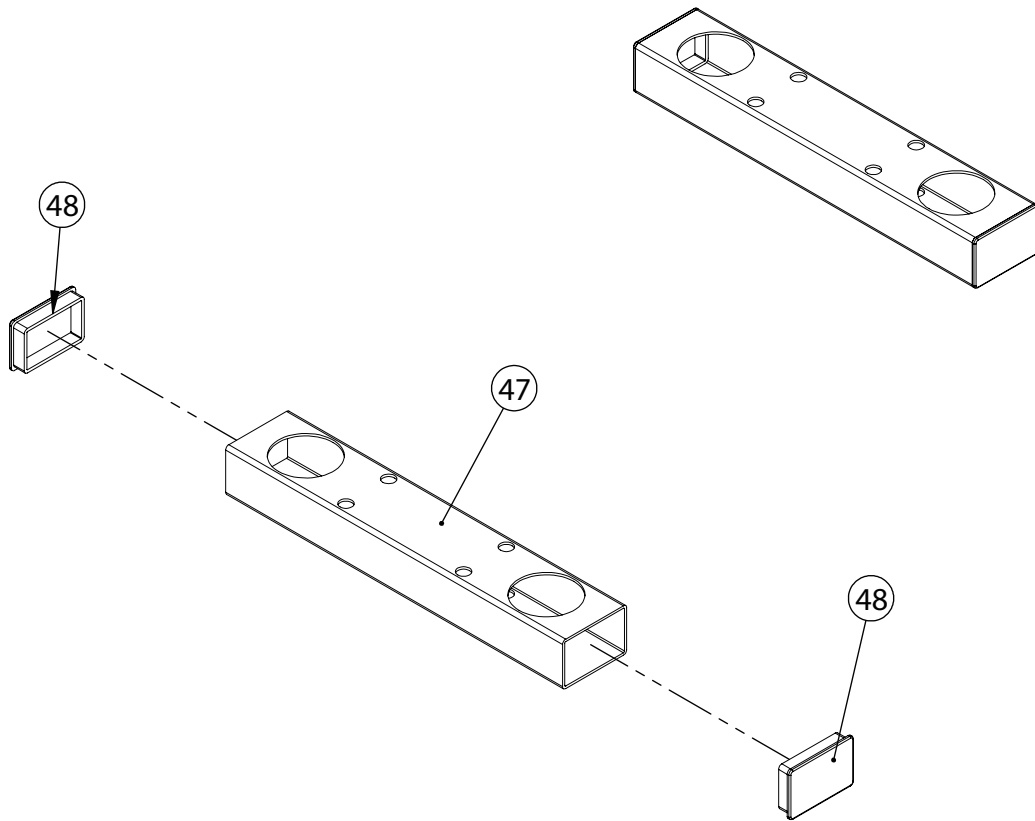

Key No.	Description	Note	Quantity
47	Guide Rod Locking Frame Tube	□40*60*2	1
48	End Cap	□40×60×2	2

EXPLODED DIAGRAM


(15) Sliding Carriage, 1 pc/ set

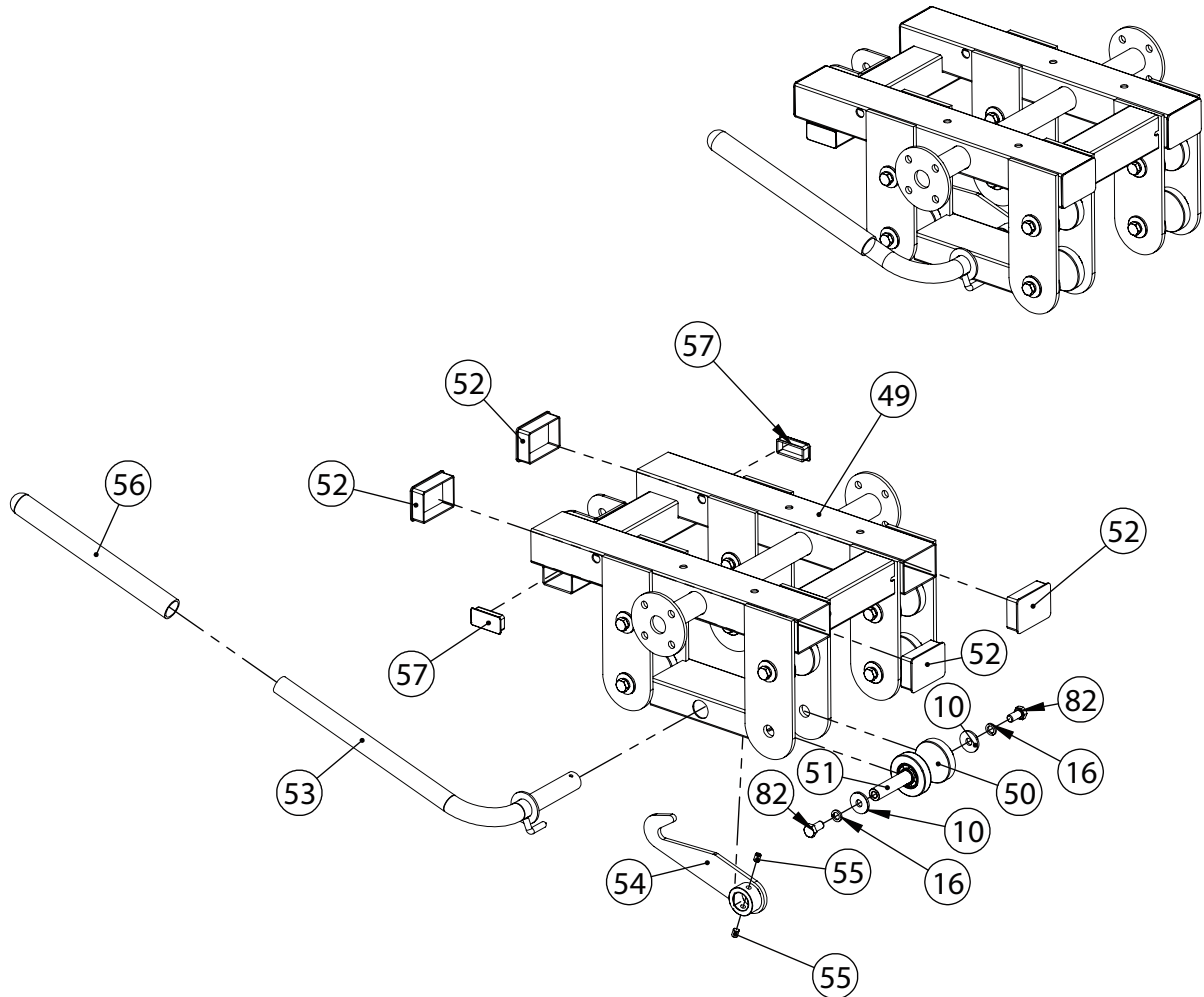

Key No.	Description	Note	Quantity
10	Large Flat Washer	$\phi 30 \times \phi 10 \times 3$	16
16	Spring Washer	$\phi 10$	16
49	Sliding Carriage Frame		1
50	Roller		8
51	Roller Inner Shaft	$\phi 17 \times 81 - M10$	8
52	End Cap	$50 \times 70 \times 2$	4
53	Locking Handle		1
54	Locking Hook		1
55	Grub Screw	M8*10	2
56	Locking Handle Grip	$\phi 24.5 \times 280$	1
57	End Cap	$\square 25 \times 50 \times 1.5$	2
82	Hexagonal Head Bolt	M10*20	16

EXPLODED DIAGRAM



(19) Lock Pin, 1 pc/ set

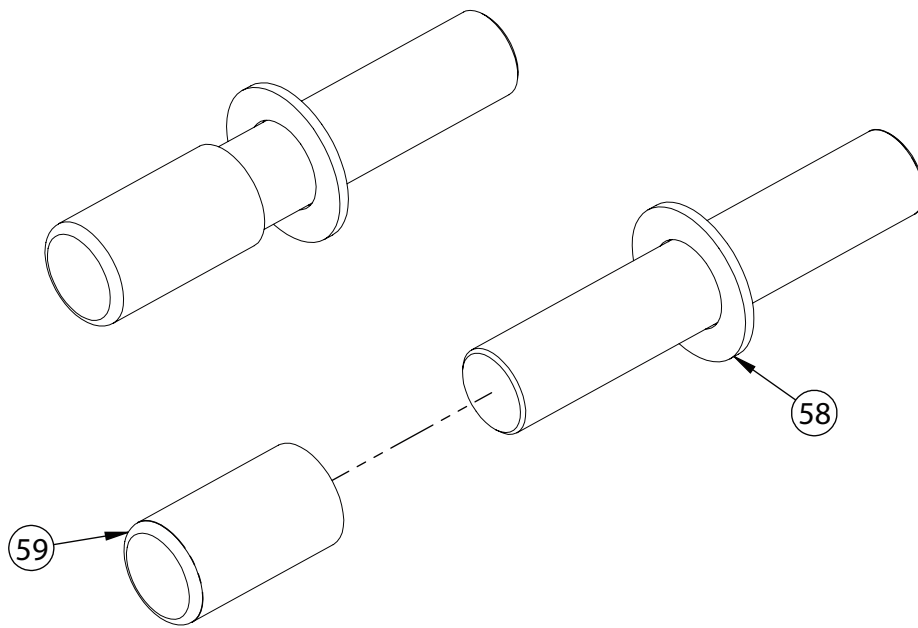

Key No.	Description	Note	Quantity
58	Lock Pin Frame		1
59	Protection Sleeve	$\phi 30 \times \phi 25 \times 50$	1

EXPLODED DIAGRAM


(21) Adjustment Outer Frame, 2 pcs/ set

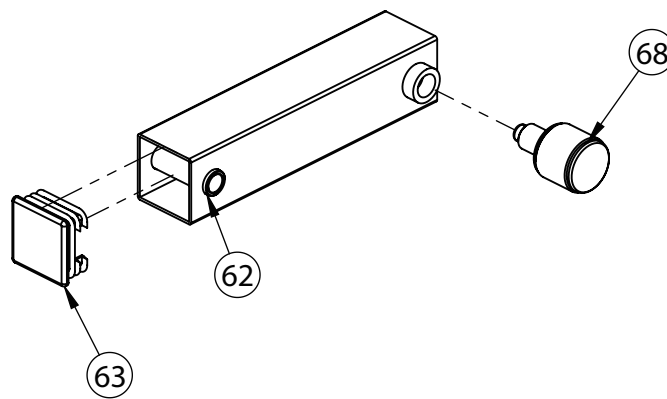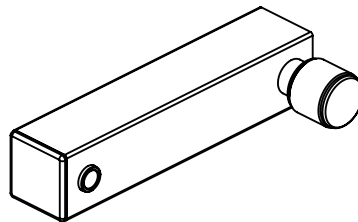

Key No.	Description	Note	Quantity
62	Footplate Adjustment Outer Frame Tube		1
63	End Cap	□50×50×2	1
68	Pop Pin	φ10×M18×22	1

EXPLODED DIAGRAM


(24) Footplate Adjustment Inner Frame, 1 pc/ set

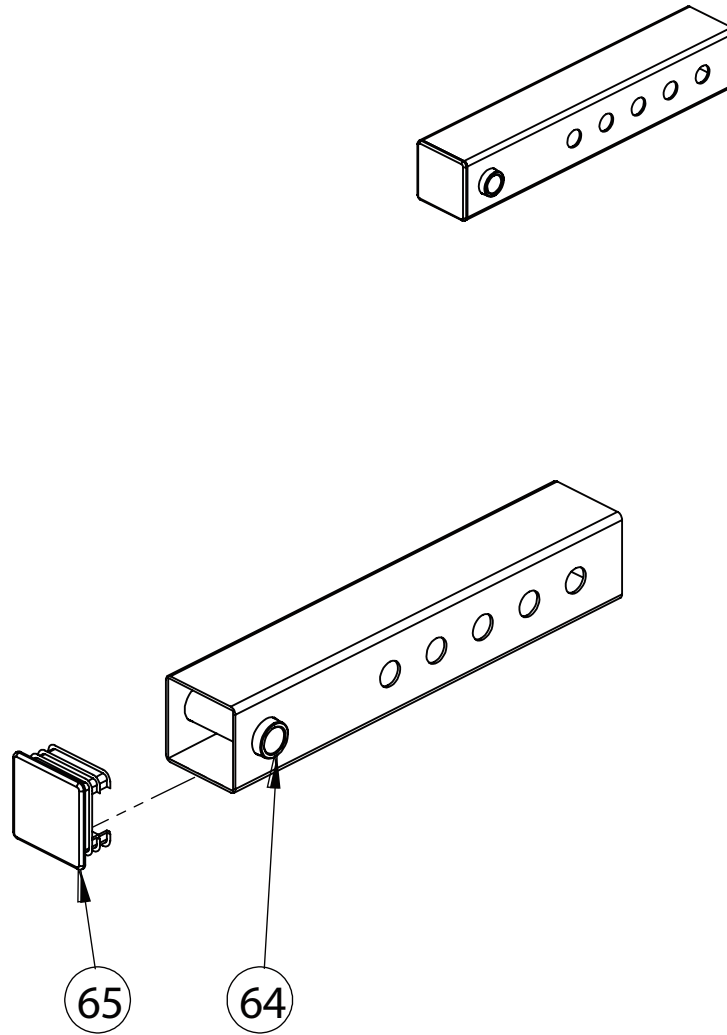

Key No.	Description	Note	Quantity
64	Footplate Adjustment Inner Frame Tube		1
65	End Cap	□45×45×2	1

EXPLODED DIAGRAM


(29) Back Pad Frame, 1 pc/ set

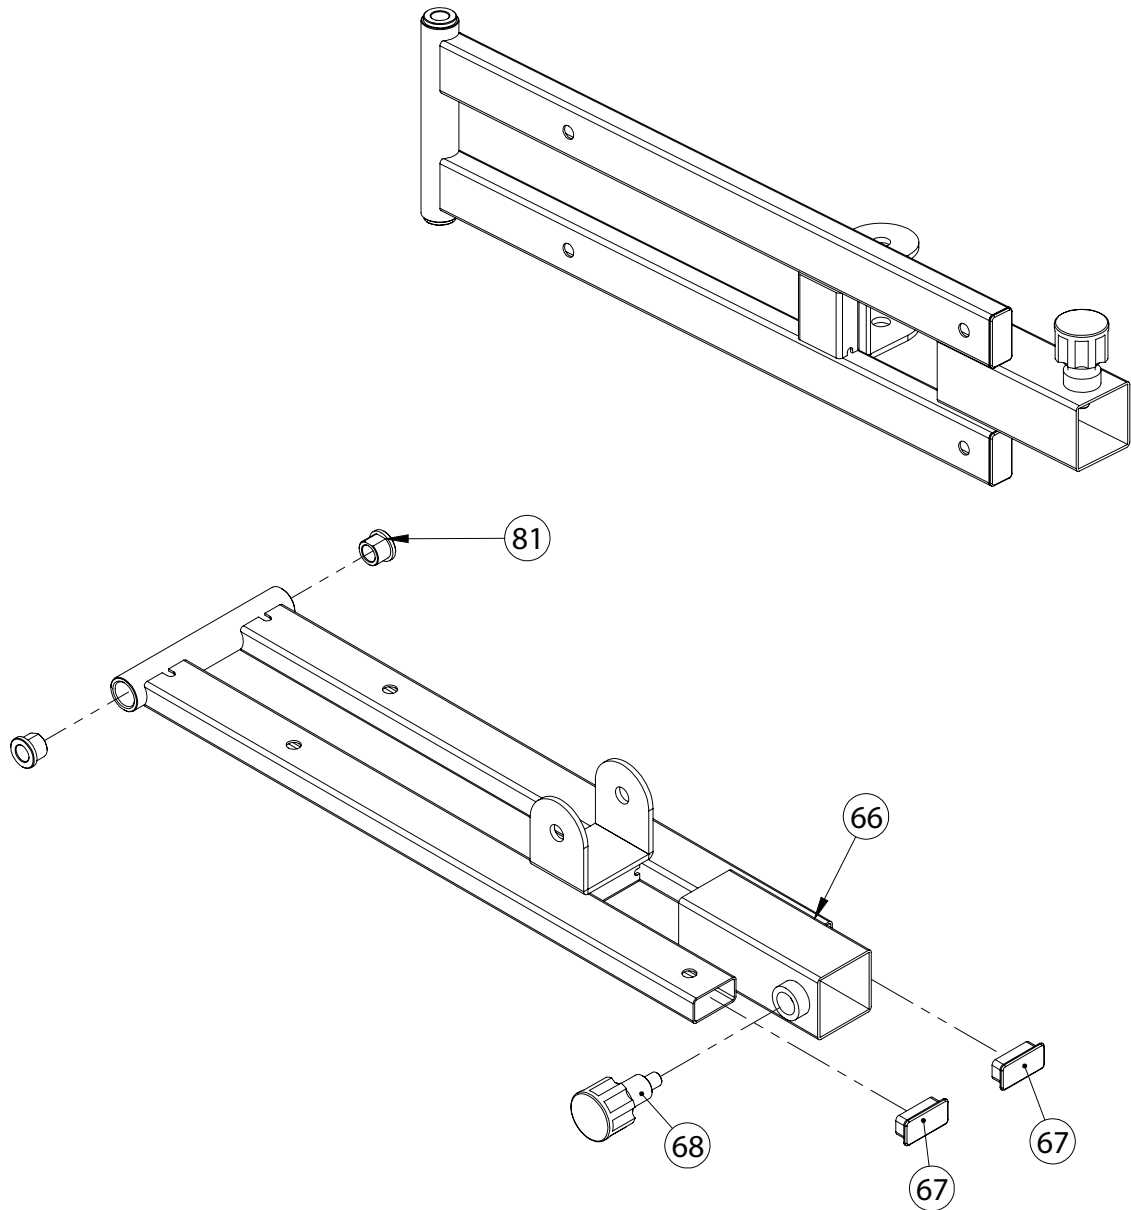

Key No.	Description	Note	Quantity
66	Back Pad Frame Tube		1
67	End Cap	□40×20×1.5	2
68	Pop Pin	φ10×M18×22	1
81	Bushing	φ 22× φ 18× φ 12.2×15	2

EXPLODED DIAGRAM



(30) Back Pad Adjustment Inner Frame, 1 pc/ set

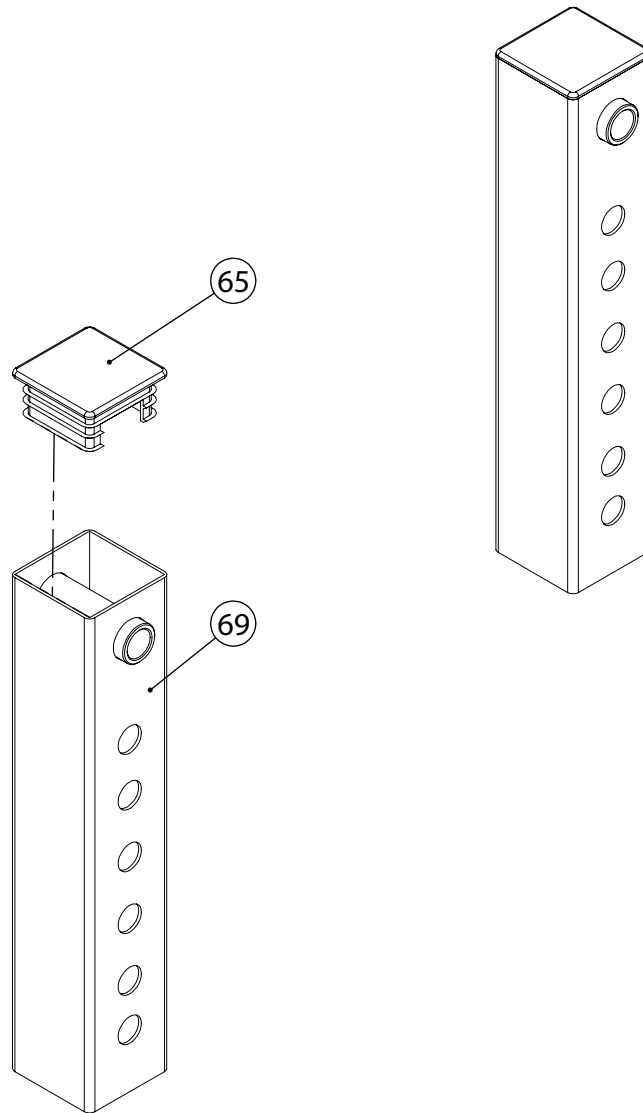

Key No.	Description	Note	Quantity
69	Back Pad Adjustment Inner Frame Tube		1
65	End Cap	□45×45×2	1

EXPLODED DIAGRAM


(34) Calf Raise Frame, 1 pc/ set

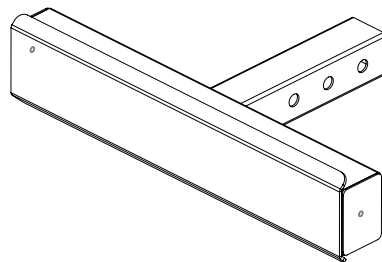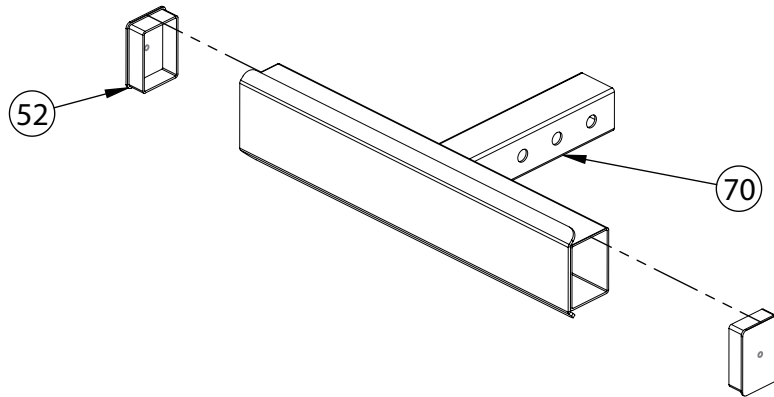

Key No.	Description	Note	Quantity
52	End Cap	50*70*2	2
70	Calf Raise Frame Tube		1

EXPLODED DIAGRAM


(38) Handle and Weight Plate Sleeve - Right, 1 pc/ set

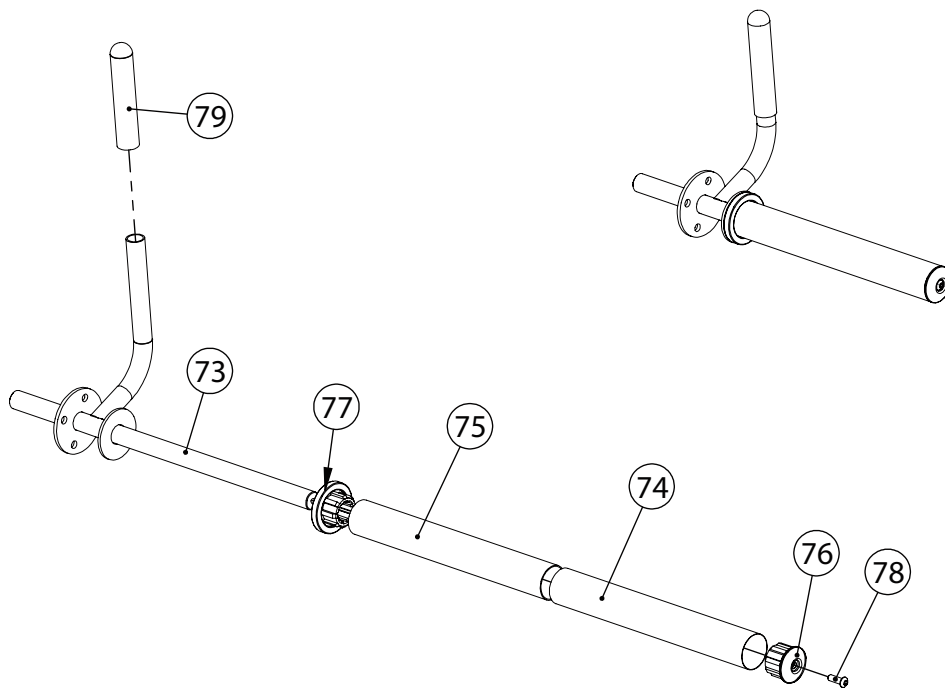

Key No.	Description	Note	Quantity
73	Handle and Weight Plate Sleeve Tube - Right		1
74	Outer Sleeve - Weight Plate Holder	$\phi 49.5 \times 0.6$	1
75	Inner Sleeve - Weight Plate Holder	$\phi 48 \times 1.5$	1
76	Weight Plate Holder End Cap	$\phi 50 \times \phi 44.8 \times \phi 25.5$	1
77	Internal Bushing	$\phi 70 \times \phi 44.8 \times \phi 25.5 \times 30$	1
78	Inner Hexagonal Flat Round Bolt	M8×25	1
79	Handle Grip	$\phi 24.5 \times 150$	1

EXPLODED DIAGRAM



(39) Handle and Weight Plate Sleeve - Left, 1 pc/ set

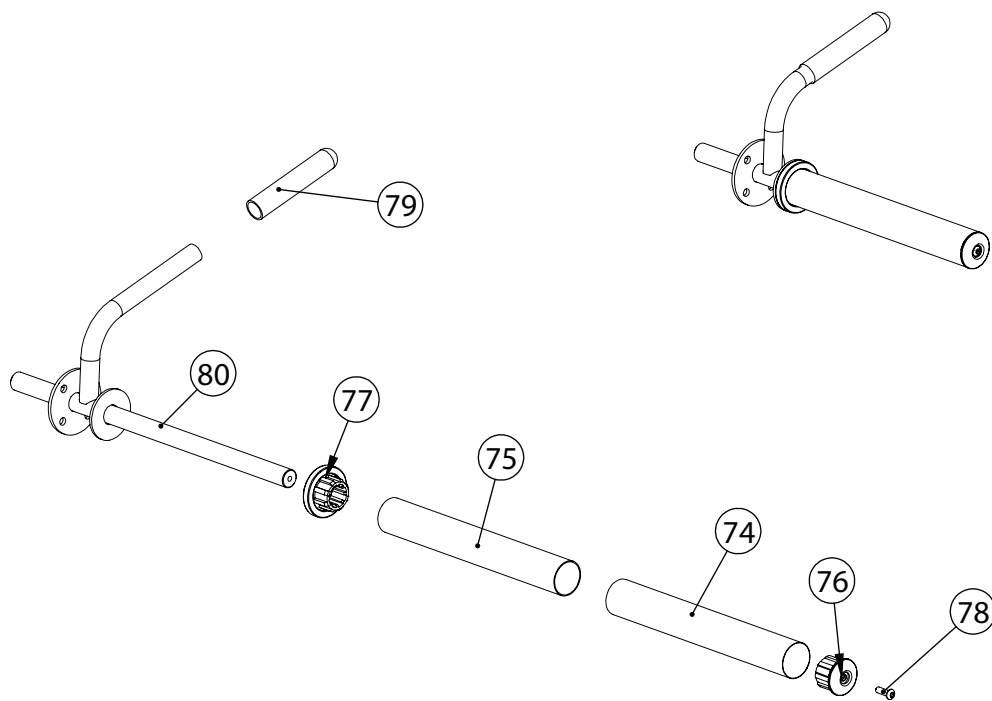

Key No.	Description	Note	Quantity
74	Outer Sleeve - Weight Plate Holder	$\phi 49.5 \times 0.6$	1
75	Inner Sleeve - Weight Plate Holder	$\phi 48 \times 1.5$	1
76	Weight Plate Holder End Cap	$\phi 50 \times \phi 44.8 \times \phi 25.5$	1
77	Internal Bushing	$\phi 70 \times \phi 44.8 \times \phi 25.5 \times 30$	1
78	Inner Hexagonal Flat Round Bolt	M8 \times 25	1
79	Handle Grip	$\phi 24.5 \times 150$	1
80	Handle and Weight Plate Sleeve Tube - Left		1

EXPLODED DIAGRAM


(40) Shoulder Pad Frame, 1 pc/ set

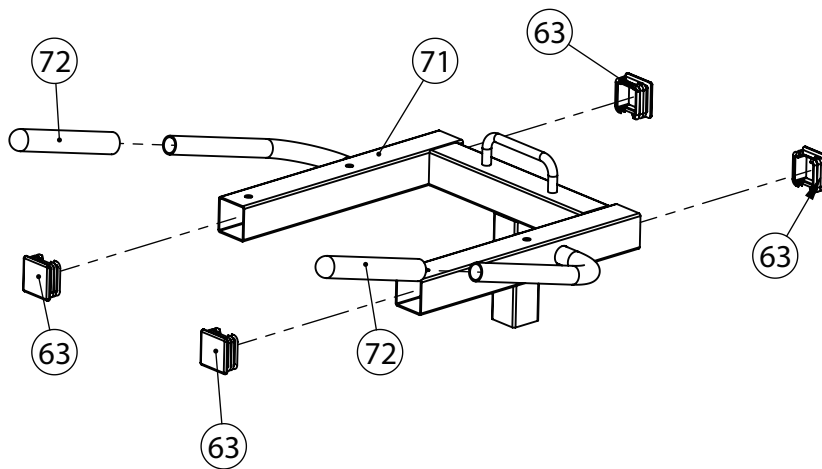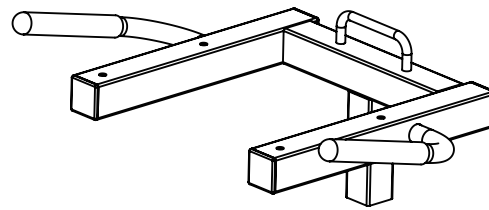

Key No.	Description	Note	Quantity
63	End Cap	□50×50×2	4
71	Shoulder Pad Frame Tube		1
72	Shoulder Pad Frame Grip	φ24.5×185	2

EXPLODED DIAGRAM

(50) Roller , 8 pcs/ set

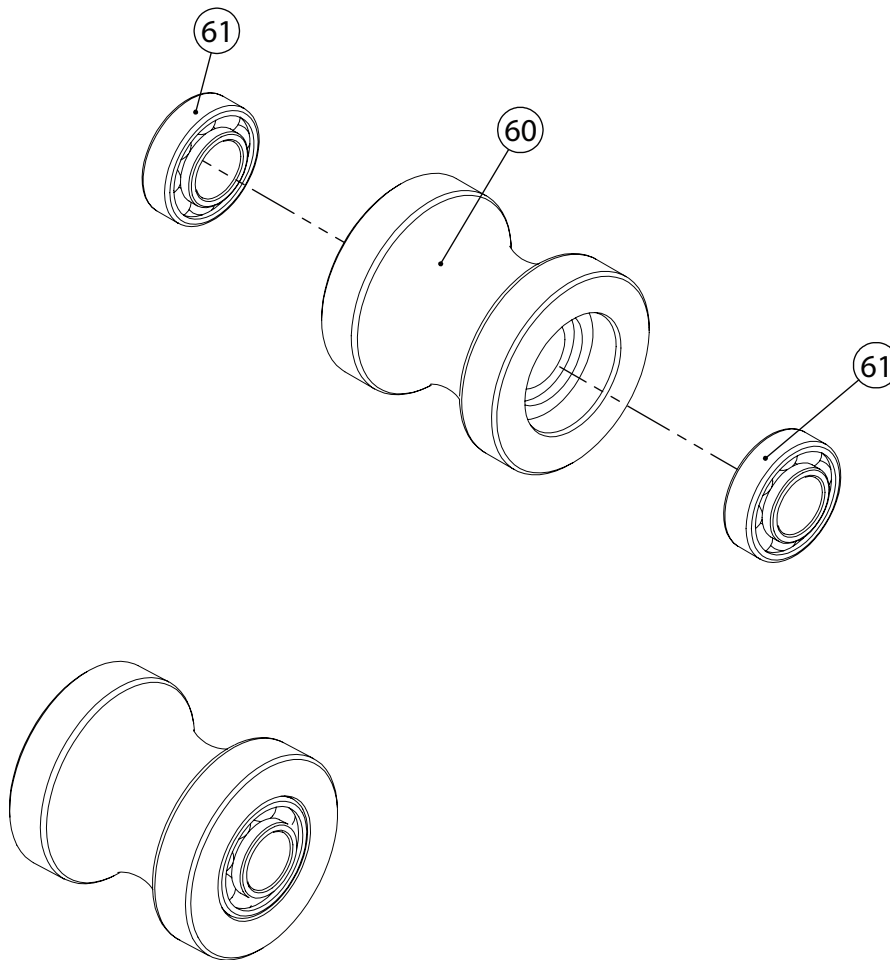

Key No.	Description	Note	Quantity
60	Roller Wheel	$\phi 59$	1
61	Bearing	6003	2

PARTS LIST

Key No.	Description	Note	Quantity
1	Rear Base Frame		1
2	Base Linking Frame		1
3	Front Base Frame		1
4	Rear Support Frame		1
5	Centre Frame		1
6	Flat Washer	φ10	50
7	Hexagonal Head Bolt	M10×90	4
8	Lock Nut	M10	27
9	Hexagonal Head Bolt	M10×70	4
10	Large Flat Washer	φ30*φ10*3	22
11	Hexagonal Head Bolt	M10×80	3
12	Guide Rod		2
13	Guide Rod Locking Frame		1
14	U-shaped Plate	T4	1
15	Sliding Carriage		1
16	Spring Washer	φ10	22
17	Hexagonal Head Bolt	M10×25	14
18	Hexagonal Head Bolt	M10×60	4
19	Lock Pin		1
20	Angled Support Frame		2
21	Adjustment Outer Frame		2
22	Foot Plate Weldment		1
23	Double Head Bolt	φ12×270-M10	1
24	Footplate Adjustment Inner Frame		1
25	Flat Washer	φ12	8
26	Lock Nut	M12	4
27	Hexagonal Head Bolt	M12×80	4
28	Footplate		1
29	Back Pad Frame		1
30	Back Pad Adjustment Inner Frame		1
31	Double Head Bolt	φ12×323-M10	1
32	Back Pad		1
33	Seat Pad		1
34	Calf Raise Frame		1
35	Flat Washer	φ8	12
36	Hexagonal Head Bolt	M8×40	4
37	Hexagonal Head Bolt	M8×70	8
38	Handle and Weight Plate Sleeve - Right		1
39	Handle and Weight Plate Sleeve - Left		1


PARTS LIST

Key No.	Description	Note	Quantity
40	Shoulder Pad Frame		1
41	Shoulder Pad		2
42	Olympic Spring Collar	φ50	2
43	Centre Frame Tube		1
44	End Cap	□40×80×2	2
45	Guide Rod Inner Tube		2
46	Guide Rod Outer Tube	φ49.5×0.6	2
47	Guide Rod Locking Frame Tube	□40×60×2	1
48	End Cap	□40×60×2	2
49	Sliding Carriage Frame		1
50	Roller		8
51	Roller Inner Shaft	φ17×81-M10	8
52	End Cap	50×70×2	6
53	Locking Handle		1
54	Locking Hook		1
55	Grub Screw	M8×10	2
56	Locking Handle Grip	φ24.5×280	1
57	End Cap	□25×50×1.5	2
58	Lock Pin Frame		1
59	Protection Sleeve	φ30×φ25×50	1
60	Roller Wheel	φ59	8
61	Bearing	6003	16
62	Footplate Adjustment Outer Frame Tube		2
63	End Cap	□50×50×2	6
64	Footplate Adjustment Inner Frame Tube		1
65	End Cap	□45×45×2	2
66	Back Pad Frame Tube		1
67	End Cap	□40×20×1.5	2
68	Pop Pin	φ10×M18×22	1
69	Back Pad Adjustment Inner Frame Tube		1
70	Calf Raise Frame Tube		1
71	Shoulder Pad Frame Tube		1
72	Shoulder Pad Frame Grip	φ24.5×185	2
73	Handle and Weight Plate Sleeve Tube - Right		1
74	Outer Sleeve - Weight Plate Holder	φ49.5×0.6	2
75	Inner Sleeve - Weight Plate Holder	φ48×1.5	2
76	Weight Plate Holder End Cap	φ50×φ44.8×φ25.5	2
77	Internal Bushing	φ70×φ44.8×φ25.5×30	2
78	Inner Hexagonal Flat Round Bolt	M8×25	2

PARTS LIST

Key No.	Description	Note	Quantity
79	Handle Grip	$\phi 24.5 \times 150$	2
80	Handle and Weight Plate Sleeve Tube - Left		1
81	Bushing	$\phi 22 \times \phi 18 \times \phi 12.2 \times 15$	2
82	Hexagonal Head Bolt	M10 \times 20	16

MEASURING FOR BOLT LENGTH





We believe success comes from striving to be better than yesterday. It comes from the urge to push boundaries and break through barriers. Fueled with the belief that everybody deserves a fit and healthy lifestyle, we are dedicated to providing innovative strength and fitness solutions to build stronger, happier and healthier lives.

WARRANTY

The Force USA range of strength equipment carries a Lifetime (10 Year) Structural Warranty along with two years cover on all moving parts and 90 days warranty on all upholstery items. This warranty applies to first owners and does not cover second-hand equipment or re-sold equipment. This Force USA warranty covers only failures due to defects in structural elements, cables and pulleys and workmanship that occur during regular use in the warranted environment. It will not cover damage that occurs in transport/delivery or failure due to misuse, abuse, neglect, misapplication, alteration or improper assembly of the product. The replacement or repair provided for under the Force USA warranty is the responsibility of the user, and the customer will be responsible for any freight charges that apply. Force USA will not be liable for any consequential damages or breach of any implied warranty on the range of Force USA strength equipment. Force USA reserves the right to provide reconditioned parts and/or to request a return and repair existing defective components on the Force USA product.