

Assembly and Operating Instructions



Art. No. TF-FX99

Content

| 1 | GENERAL INFORMATION | 7 |
|-------|---|----|
| 1.1 | Technical Data | 7 |
| 1.2 | Personal Safety | 8 |
| 1.3 | Electrical Safety | 9 |
| 1.4 | Set-Up Place | 9 |
| 2 | ASSEMBLY | 10 |
| 2.1 | General Instructions | 10 |
| 2.2 | Scope of Delivery | 11 |
| 3 | OPERATING INSTRUCTIONS | 21 |
| 3.1 | Console display | 21 |
| 3.2 | Button functions | 22 |
| 3.3 | Powering on the crosstrainer | 23 |
| 3.4 | Standby mode | 23 |
| 3.5 | MANUAL (Manual programs) | 24 |
| 3.5.1 | Quick-Start program | 24 |
| 3.5.2 | Target programs | 24 |
| 3.6 | PROGRAM (Profile programs) | 25 |
| 3.7 | USER (User defined program) | 27 |
| 3.8 | H.R.C. (Heart rate controlled programs) | 28 |
| 3.9 | WATT (Watt program) | 29 |
| 3.10 | RECOVERY (Recovery function) | 29 |
| 3.11 | BODY FAT (Body fat analysis) | 30 |
| 3.12 | Bluetooth and Fitness Apps | 31 |
| 4 | STORAGE AND TRANSPORT | 32 |
| 4.1 | General Instructions | 32 |
| 4.2 | Transportation Wheels | 32 |
| 5 | TROUBLESHOOTING, CARE AND MAINTENANCE | 33 |
| 5.1 | General Instructions | 33 |
| 5.2 | Faults and Fault Diagnosis | 33 |
| 5.3 | Error codes and troubleshooting | 34 |
| 5.4 | Maintenance and inspection calendar | 35 |
| 6 | DISPOSAL | 35 |
| 7 | RECOMMENDED ACCESSORIES | 36 |

| 8 | ORDERING SPARE PARTS | 37 |
|-----|------------------------------|-----|
| 8.1 | Serial Number and Model Name | 37 |
| 8.2 | Parts List | 38 |
| 8.3 | Exploded Drawing | 43 |
| 9 | WARRANTY | 44 |
| 10 | CONTACT | 4.0 |
| 10 | CONTACT | 46 |

Dear customer,

Thank you for choosing a high-quality equipment of the brand Taurus[®]. Taurus[®] offers sports and fitness equipment for the sophisticated home sport and the equipment of fitness studios and business customers. With Taurus[®] fitness equipment, the focus is on what sport is all about: maximum performance! Therefore, the equipment is developed in close consultation with athletes and sports scientists. Because athletes know best what makes perfect fitness equipment.

Further information can be found at www.sport-tiedje.com.

Intended Use

The equipment may only be used for its intended purpose.

The equipment is suitable for home use and semi-professional use (e.g. hospitals, clubs, hotels, schools, etc.). The equipment is not suitable for commercial or professional use (e.g. fitness studio).

Legal Notice

Sport-Tiedje GmbH Europe's No. 1 for home fitness

International Headquarters Flensburger Straße 55 24837 Schleswig Germany Management:

Christian Grau

Sebastian Campmann

Dr. Bernhard Schenkel

No. HRB 1000 SL

Local Court Flensburg

European VAT Number: DE813211547

Disclaimer



©2008 Taurus® is a registered brand of the company SportTiedje GmbH. All rights reserved. Any use of this trademark without the explicit written permission of SportTiedje is prohibited.

Product and manual are subject to change. Technical data can be changed without advance notice.

ABOUT THIS MANUAL

Please carefully read the entire manual before installation and first use. The manual will help you to quickly set up the system and explains how to safely use it. Make sure that all persons exercising with the equipment (especially children and persons with physical, sensory, mental or motor disabilities) are informed about this manual and its contents in advance. In case of doubt, responsible persons must supervise the use of the equipment.



This equipment has been manufactured according to the latest safety knowledge. As far as possible, potential safety hazards which could cause injury have been eliminated. Make sure to carefully follow the instructions and that all parts are securely in place. If required, read through the instructions again to correct any mistakes.

Please pay close attention to the safety and maintenance instructions given here. The contract partner cannot be held liable for damage to health, accidents or damage to the equipment when it is not used in accordance with these instructions.

The following safety instructions may appear in this manual:

► ATTENTION

This notice indicates potentially hazardous situations which, if not avoided, may result in property damage.

CAUTION

This notice indicates potentially hazardous situations which, if not avoided, may result in slight or minor injuries!

↑ WARNING

This notice indicates potentially hazardous situations which, if not avoided, may result in death or serious injuries!

↑ DANGER

This notice indicates potentially hazardous situations which, if not avoided, will result in death or serious injuries!

(i) NOTICE

This notice indicates further useful information.

Retain these instructions in a safe place for future reference, maintenance or when ordering replacement parts.

1.1 Technical Data

LCD Display:

- + Training duration in min.
- + Speed in km/h
- + Training distance in km
- + Calories in kcal
- + Resistance level
- + Incline level
- + Heart rate (using the hand pulse sensors or a chest strap)
- + RPM
- + Watts

Brake system: Electro-magnetic induction brake

Resistance levels: 32

Wattage

Adjustable range in the watt programme: 10-350 W Min. and max. Watt at 60 RPM: 50-400 W Min. and max. Watt at 100 RPM: 148-765W

User profiles: 4 Programs in total: 25 Quick-start program: 1 Target programs: 4 Pre-set programs: 12 User defined programs: 1 Heart rate programs: 4 Watt programs: 1

Stride length:max. 56 cmStride height:14 cmTransfer ratio:1:8.75Flywheel mass:10 kg

Weight and dimensions:

Packed dimensiosn (LxBxH): 130 cm x 66 cm x 98 cm Assembled dimensions (LxBxH): 211 cm x 82 cm x 188 cm

Article weight (gross, incl. packaging): 150.6 kg Article weight (net, without packaging): 127 kg

Maximum user weight: 180kg

1.2 Personal Safety

↑ DANGER

- + Before you start using the equipment, you should consult your physician that this type of exercise is suitable for you from a health perspective. Particularly affected are persons who: have a hereditary disposition to high blood pressure or heart disease, are over the age of 45, smoke, have high cholesterol values, are overweight and/or have not exercised regularly in the past year. If you are under medical treatment that affects your heart rate, medical advice is absolutely essential.
- + Note that excessive training can seriously endanger your health. Please also note that heart rate monitoring systems can be inaccurate. If you notice any signs of weakness, nausea, dizziness, pain, shortness of breath, or other abnormal symptoms, stop exercising immediately and seek advice from your doctor if necessary.

↑ WARNING

- + This equipment may not be used by children under the age of 14.
- + Children should not be allowed unsupervised access to the equipment.
- + Persons with disabilities must have a medical license and must be under strict observation when using the equipment.
- + The equipment is strictly for use by one person at a time.
- + If your equipment provides a safety key, the clip of the safety key must be attached to your clothing before starting your training. In the event of a fall, the EMERGENCY STOP of the equipment can be initiated.
- + Keep your hands, feet and other body parts, hair, clothing, jewellery and other objects well clear of moving parts.
- + During use, wear suitable sports clothing rather than loose or baggy clothing. When wearing sports shoes, make sure they have suitable soles, preferably made of rubber or other non-slip materials. Shoes with heels, leather soles, studs or spikes are unsuitable. Never exercise barefoot.

CAUTION

- + If your equipment needs to be connected to the power supply with a mains cable, make sure that the cable is not a potential tripping hazard.
- + Make sure that nobody is within the range of motion of the equipment during training so as not to endanger you or other persons.

ATTENTION

+ Do not insert any objects of any kind into the openings of the device.

1.3 Electrical Safety

⚠ DANGER

+ In order to reduce the risk of an electric shock, always unplug the equipment from the mains socket immediately after your workout, before assembly or dismantling, and before maintenance or cleaning. Do not pull on the cable.

↑ WARNING

- + Do not leave the equipment unattended while the mains cable is plugged into the mains socket. During your absence, the mains cable must be removed from the mains socket to prevent improper use by third parties or children.
- + If the mains cable or plug is damaged or defective, contact your contract partner. Until repair, the equipment must not be used.

ATTENTION

- + The equipment requires a mains connection of 220-230 V with 50 Hz mains voltage.
- + The equipment may only be connected directly to an earthed socket using the supplied mains cable. Extension cables must conform to VDE guidelines. Always completely unwind the mains cable.
- + The socket must be protected by a fuse with a minimum fuse rating of "16 A, slow blow".
- + Do not make any changes to the mains cable or the mains plug.
- + Keep the mains cable away from water, heat, oil and sharp edges. Do not route the mains cable underneath the equipment or under a carpet or rug, and do not place any objects on top of it.

1.4 Set-Up Place

WARNING

+ Do not place the equipment in main corridors or escape routes.

CAUTION

- + The training room should be well ventilated during training and not be exposed to any draughts.
- + Choose the place in which to set up the equipment such that there is enough free space/ clearance to the front, the rear and to the sides of the equipment.
- + The set-up and mounting surface of the equipment should be flat, loadable and solid.

► ATTENTION

- + The device may only be used in one building, in sufficiently tempered and dry rooms (ambient temperatures between 10°C and 35°C). The equipment should not be used outdoors or in rooms with high humidity (over 70%) like swimming pools.
- + A floor protective mat/equipment underlay can help to protect high-quality floor coverings (parquet, laminate, cork, carpets) from dents and sweat and can help to level out slight unevenness.

2.1 General Instructions

↑ DANGER

+ Do not leave any tools, packaging materials such as foils or small parts lying around, as otherwise there is a danger of suffocation for children. Keep children away from the equipment during assembly.

↑ WARNING

+ Pay attention to the instructions attached to the equipment in order to reduce the risk of injuries.

CAUTION

- + Do not open the packaging when it is lying on its side.
- + Ensure to have sufficient room for movement in each direction during assembly.
- + The assembly of the equipment must be carried out by at least two adults. If in doubt, seek the help of a third technically skilled person.

ATTENTION

+ To prevent damage to the equipment and the floor, assemble the equipment on a mat or packaging board.

(i) NOTICE


- + In order to make the assembly as simple as possible, some screws and nuts to be used can already be pre-assembled.
- + Ideally, assemble the equipment at its later set-up place.

2.2 Scope of Delivery

The scope of delivery consist of the following parts. At the beginning, check whether all parts and tools belonging to the device are included in the scope of delivery and whether damage has occurred. In the event of complaints, the contractual partner must be contacted directly.

CAUTION

If parts of the scope of delivery are missing or damaged, the assembly must not be carried out.

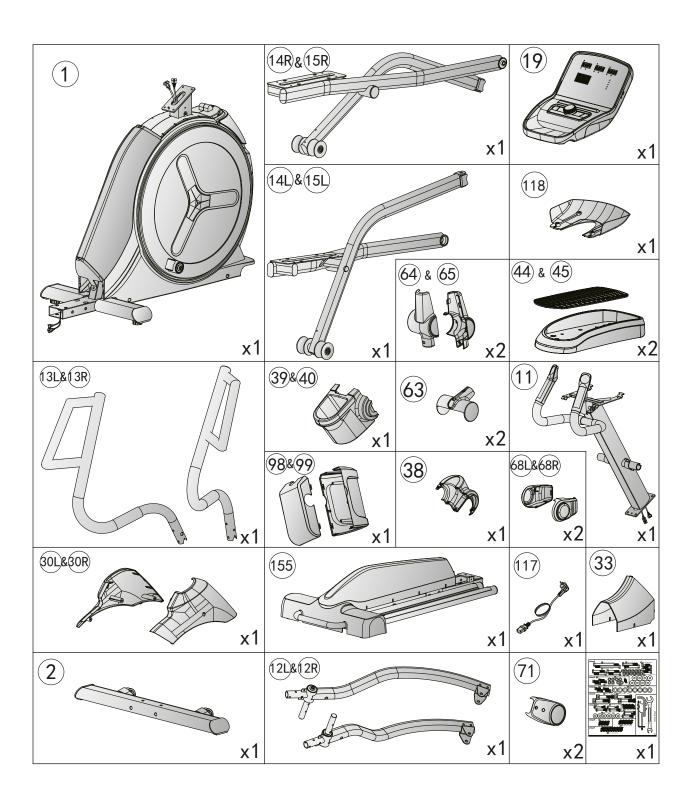

2.3 Assembly

Before assembly, take a close look at the individual assembly steps shown and carry out the assembly in the order given.

(i) NOTICE

First loosely screw all parts together and check that they fit properly. Tighten the screws using the tool only when you are instructed to do so.

Step 1: Assembling the front and rear feet


- 1. Screw the frontal foot (2) to the main frame (1) with two hexagonal screws (3), two hexagonal screws (5) and four spring washers (4). Only hand tighten the screws in place.
- 2. Connect the incline cable (158) and the control cable (167) together.
- 3. Connect both incline control cables (165 & 166) together.

► ATTENTION

In the following step please pay attention that you don't clamp the cables between the frames.

4. Screw the rear foot with the rails (155) to the main frame (1) with eight washers (51), eight spring washers (4), four hexagonal screws (147), four hexagonal screws (148) and hand tighten the screws in place.

| 3 | | M8*1.25*120L | x 2 |
|------|---|---------------|-------------|
| 5 | | M8*1.25*70L | x 2 |
| 147 | | M8*1.25*55L | x 4 |
| 148 | | M8*1.25*35L | x 4 |
| 4 | Ø | D15.4*D8.2*2T | x 12 |
| (51) | | D25*D8.5*2T | x 8 |

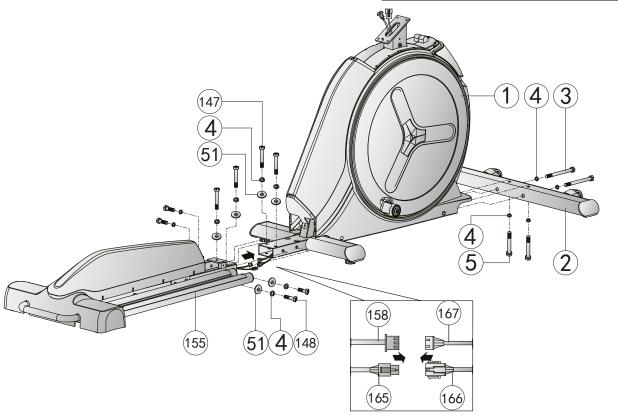


Step 2: Assembling the console mast

- 1. Connect the console cable in the mast (101) with the console cable in the main frame (102).
- 2. Connect the signal cable in the mast (178) with the signal cable in the main frame (179).

► ATTENTION


In the following step please pay attention that you don't clamp the cables between the frames.

- 3. Screw the console mast (11) to the main frame (1) with four washers (7), four spring washers (4), four screws (119) and hand tighten the screws in place.
- 4. Screw the rear cover (33) to the frame with two screws (96) and hand tighten the screws in place.

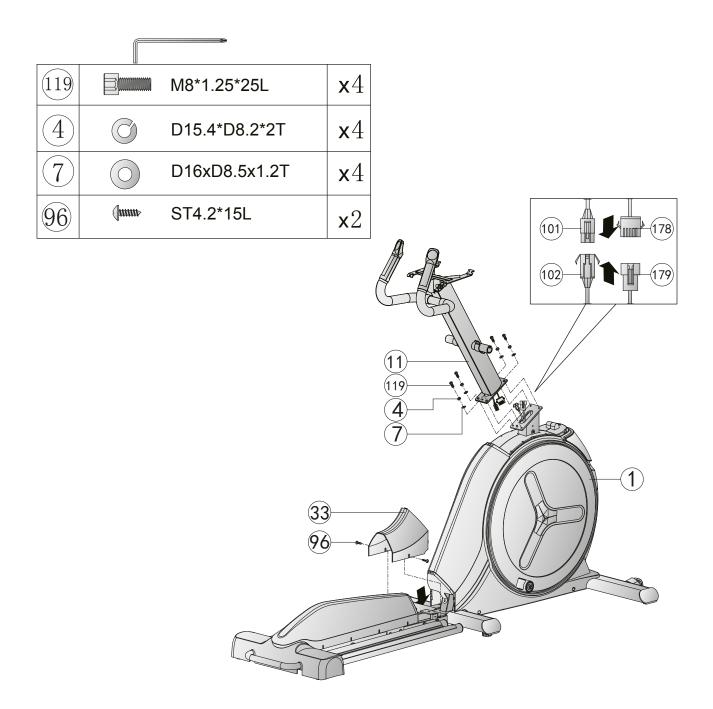


Step 3: Mounting the arms

- 1. Screw the left arm (12L) onto the console mast (11) with two Allen screws (6).
- 2. Screw the right arm (12R) onto the console mast (11) with two Allen screws (6). Only hand tighten the screws in place.

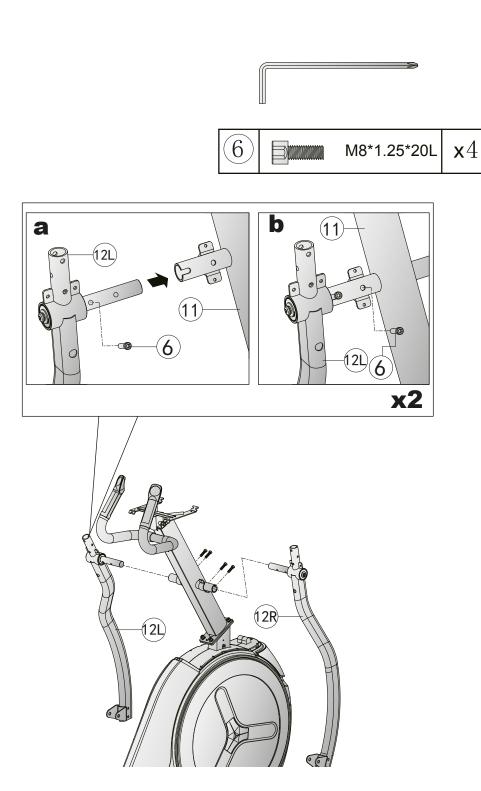


Step 4: Mounting the pedals

- 1. Mount the right and left pedal poles (14R/14L) on their respective sides of the main frame (1), each with two washers (73), one Allen screw (72) and one locking nut (74) (see fig. 4-1).
- 2. Mount the right and left pedal mounts (15R/15L) on their repsective arm (12R/12L), each with two washers (73), one Allen screw (72) and one locking nut (74) (see fig. 4-2).
- 3. Mount the right and left pedals (44) onto the pedal mounts (15R/15L), each with four screws (128) and place the pedal mats (45) on both pedals (44) (see fig. 4-3).
- 4. Only hand tighten the screws in place.

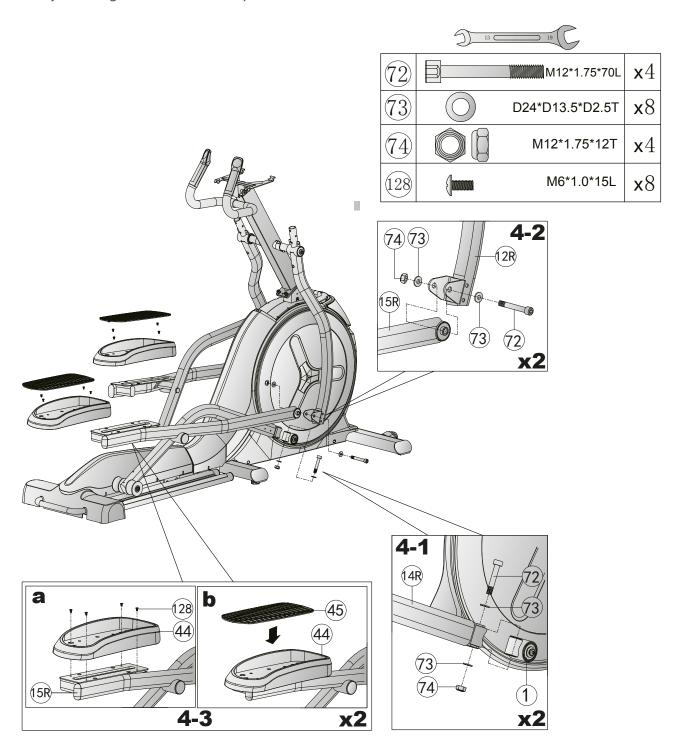

Step 5: Mounting the handles

Screw the right and left handles (13R/13L) onto the respecitve arm (12R/12L), each with three curved washers (9), three Allen screws (8) and three locking nuts (10) (see figs. 5-1 & 5-2). Only hand tighten the screws in place.

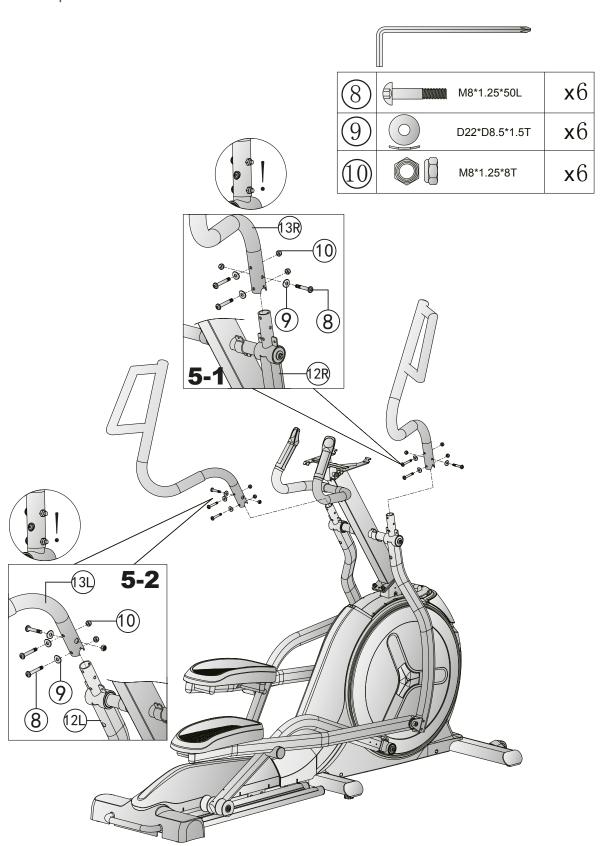


Step 6: Mounting the console

- 1. Connect the console cable from the console (100) with the console cable from the console mast (101) (see fig. 6-1).
- 2. Connect the first hot-key cable from the console (106) with the first hot-key cable from the console mast (108) and the second hot-key cable from the console (107) with the second hot-key cable from the console mast (109) (see fig. 6-1).
- 3. Connect the signal cable from the console (177) with the signal cable from the console mast (178) (see fig. 6-1).

► ATTENTION


In the following step please pay attention that you don't clamp the cables between the frames.

- 4. Screw the console (19) onto the console mast (11) with four screws (97) (see fig. 6-2) and hand tighten the screws in place.
- 5. Screw the cover (118) onto the console mast (11) with four screws (97) (see fig. 6-3) and hand tighten the screws in place.

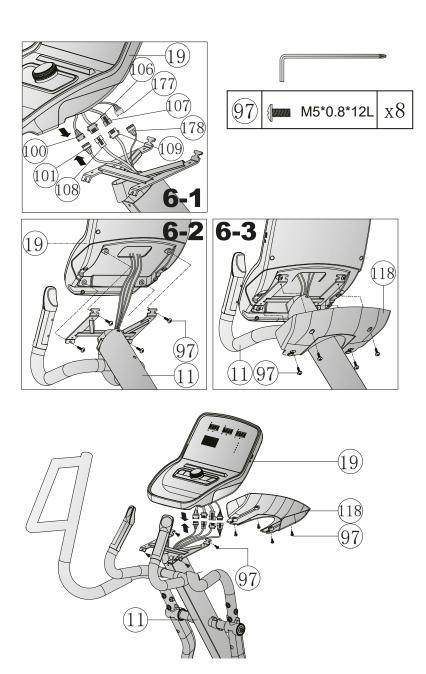

Step 7: Mounting the covers

- 1. Screw the front cover (99) under the console (19) onto the console mast (11) with two screws (96) and hand tighten the screws in place. Clip the rear cover (98) onto the front cover (99) (see fig. 7-1).
- 2. Screw the rear part of the water bottle holder (39) onto the console mast (11) with four screws (96) and hand tighten the screws in place. Clip the front cover of the water bottle holder (38) to the rear part (39) (see fig. 7-2).
- 3. Screw the front covers of the arms (64) onto both arms (12R/12L), each with two screws (96) (see fig. 7-3) and hand tighten the screws in place.
- 4. Clip the rear cover for the arms (65) onto the front cover (64) and screw it onto the arms (12R/12L), each with one screw (96) (see fig. 7-3).
- 5. Screw the left protective cover (30L) onto the main frame (1) with two screws (96) and one screw (97) and hand tighten the screws in place.
- 6. Clip the right protective cover (30R) onto the left protective cover (30L) and screw it onto the main frame (1) with one screw (97) (see fig. 7-4).
- 7. Screw the outer cover of the pedal mount (68R) onto the outer side of the pedal mount (15R/15L), each with two screws (96) and hand tighten the screws in place. Clip the inner cover (68L) onto the outer cover (68R) (see fig. 7-5).
- 8. Screw the wheel covers (63) on both sides of the crosstrainer, each with two screws (97) (see fig. 7-6) and hand tighten the screws in place.
- 9. Screw the axial covers (71) on both sides if the crosstrainer, each with two screws (97) (see fig. 7-7)and hand tighten the screws in place.

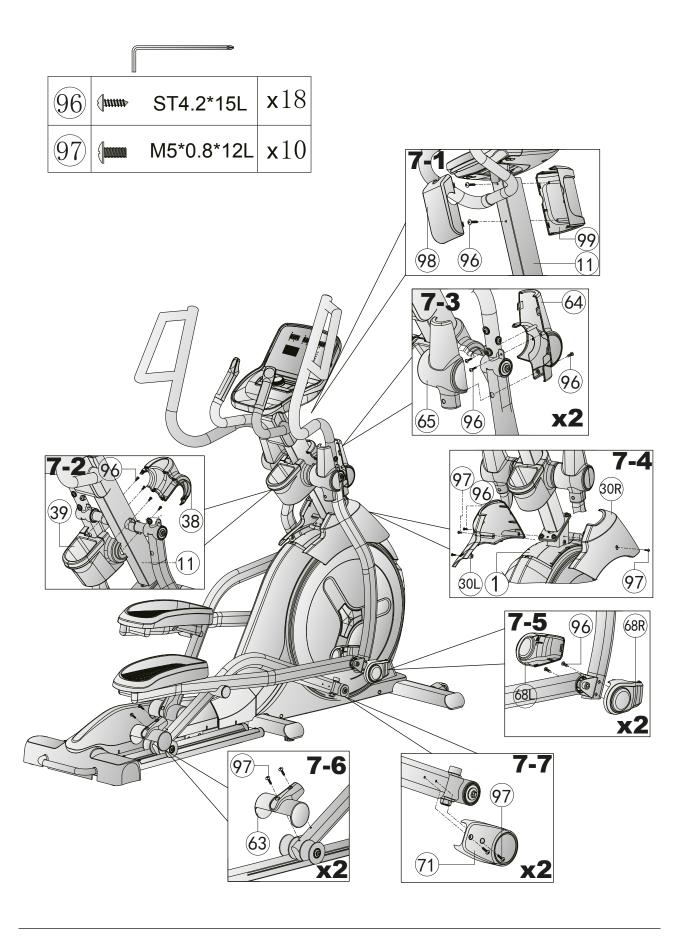

Step 8: Adjusting the feet

The crosstrainer can be stabilised on un-even surfaces with the adjustable feet.


- 1. Lift up the crosstrainer on one side to gain access to the adjustable feet underneath the frame.
- 2. Turn the screw clockwise to unscrew the foot, lifting the crosstraining at that point.
- 3. Turn the screw anti-clockwise to lower the crosstrainer at that point.

Step 9: Connecting the crosstrainer to the mains supply

ATTENTION

The crosstrainer should not be plugged into a power board, as it cannot be guaranteed that the crosstrainer will be supplied with sufficient power. This could also lead to technical errors occurring.


Firstly connect the power cord (117) to the crosstrainer and then plug it into the wall socket, making sure the electrical prerequisites covered in the chapter about electrical safety are met.

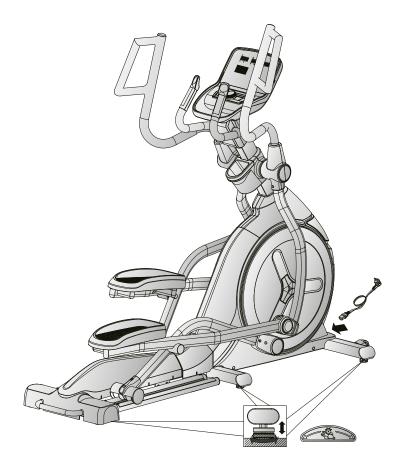

(i) NOTICE


Familiarise yourself with all the functions and setting options of the device before starting training. Have the proper use of this product explained to you by a specialist.

3.1 Console display

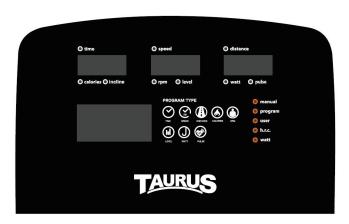

| DISPLAY | Y DESCRIPTION | | |
|----------|---|--|--|
| TIME | Display of the elapsed training time (0:00 - 99:59) Set a target time with the rotary knob (0:00 - 99:00) in 1 min. increments | | |
| SPEED | Display of the current speed (max. 99.9) | | |
| DISTANCE | + Display of the distance covered (0.00-99.99) + Set a target distance with the rotary knob (0.00-99.0) in 1km increments | | |
| CALORIES | + Display of the calories burned (0-9999) + Set a target calorie value with the rotary knob (0-9999) in 10 Cal. increment | | |
| RPM | Display of the current revolutions per minute (RPM) (0-999) | | |
| INCLINE | Display of the current incline level (0-10) Set the incline with the incline buttons (0-10) in 1 level increments | | |
| LEVEL | Display of the current resistance level | | |
| WATTS | WATTS Display of the Watt value (0 -999) | | |
| PULSE | Display of your heart rate (0-230) Set a heart rate target with the rotary knob (0-30-230) in singluar increments | | |

3.2 Button functions

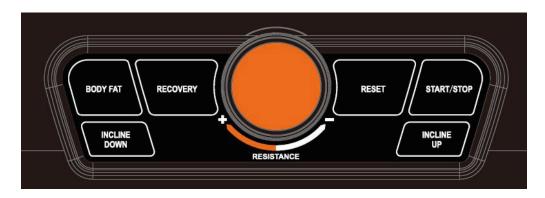

| BUTTON | DESCRIPTION | | |
|--------------|--|--|--|
| Rotary knob | Increasing the setting value or resistance level Decreasing the setting value or resistance level Setting confirmation | | |
| BODY FAT | Body fat test | | |
| RECOVERY | Heart rate test on your recovery condition | | |
| RESET | Returns you to the previous training mode while making settings or selecting an option. To reset the console, press and hold the button for 2 seconds | | |
| START/STOP | Start and stop your training | | |
| INCLINE DOWN | Decreases the incline level | | |
| INCLINE UP | Increases the incline level | | |

3.3 Powering on the crosstrainer

The console starts automatically as soon as the crosstrainer is plugged into the mains supply. Various components will light up.

- 1. Choose a user profile (U1 U4).
- 2. Enter in your gender (SEX), age (AGE), height (HEIGHT) and weight (WEIGHT).

You will proceed onto the main menu.

In the main menu you can choose from the different programs.

- + MANUAL (Quick-Start and target programs)
- + PROGRAM (Profile programs)
- + USER PROGRAM (user defined program)
- + H.R.C (Heart rate controlled programs)
- + WATT (Watt program)





3.4 Standby mode

The console goes into standby mode after four mintues without inputs or movement. The console will exit standby mode as soon as it registers movement.

3.5 MANUAL (Manual programs)

Under MANUAL you can choose between the Quick-Start program and one of the target programs. For target programs, settings for time (TIME), distance (DISTANCE), caloires (CALORIES) or heart rate (PULSE) are possible.

3.5.1 Quick-Start program

- In the main menu, select MANUAL and confirm your choice with a single push of the rotary knob.
- 2. To start the Quick-Start program, just press the START/STOP button.

Various values will start counting upwards.

- 3. To pause the program, press the START/STOP button again.
- 4. To end the program, press the RESET button.



3.5.2 Target programs

You have two choices for target programs. The target program can have a singular or multiple targets set.

Training with a singular target value

- 1. In the main menu select MANUAL and confirm your choice with a single push of the rotary knob.
- 2. Select your target value for time, calories, distance or heart rate with the rotary knob and confirm your choice with a single push of the rotary knob.

↑ WARNING

This crosstrainer is not medical equipment. The heart rate measurement of the crosstrainer can be unprecise. Different factors can influence the heart rate reading. The heart rate readings are only meant as a guide for training.

3. To start the program, press the START/STOP button.

(i) NOTICE

During training it is possible to change the resistance level with the rotary knob.

The target value counts down and the other values count upwards.

- 4. To pause the program, press the START/STOP button again.
- 5. To end the program, press the RESET button.

Training with multiple target values

- 1. In the main menu select MANUAL and confirm your choice with a single push of the rotary knob.
- 2. Select your target value for time, calories, distance and/or heart rate with the rotary knob and confirm your choice with a single push of the rotary knob.

↑ WARNING

This crosstrainer is not medical equipment. The heart rate measurement of the crosstrainer can be unprecise. Different factors can influence the heart rate reading. The heart rate readings are only meant as a guide for training.

3. To start the program, press the START/STOP button.

(i) NOTICE

During training it is possible to change the resistance level with the rotary knob.

The target values count down and the other values count upwards.

- 4. To pause the program, press the START/STOP button again.
- 5. To end the program, press the RESET button.

3.6 PROGRAM (Profile programs)

There are a total of 12 profile programs available to choose from.

- 1. In the main menu select PROGRAM and confirm your choice with a single push of the rotary knob.
- 2. Using the rotary knob select one of the profile programs and confirm your choice with a single push of the rotary knob.
- 3. Using the rotary knob select the training time and confirm the setting with a single push of the rotary knob.



- 4. To start the program, press the Um das Programm zu starten, drücken Sie die START/STOP-Taste.
- (i) NOTICE


During training it is possible to change the resistance level with the rotary knob.

5. To pause the program, press the START/STOP button again.

(i) NOTICE

While the program is paused it is possible to change the training time.

6. To end the program, press the RESET button.

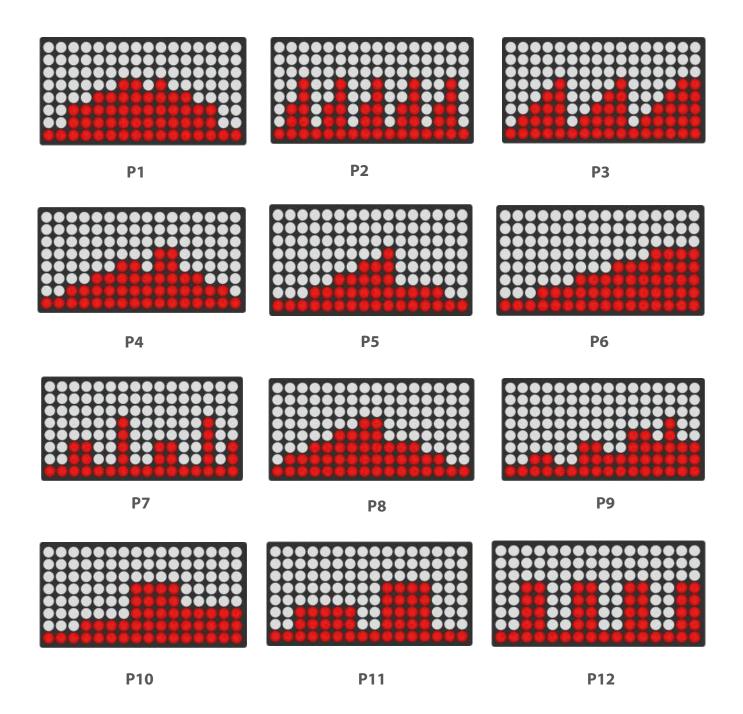

3.7 USER (User defined program)

There are 16 segments available in user defined programs.

- 1. In the main menu select USER and confirm your choice with a single push of the rotary knob.
- 2. Select the resistance level of each segment and confirm each value with a single push of the rotary knob.
- 3. To end setting the resistance levels, press and hold the rotary knob for 2 seconds.



The last set level is shown on the display.

You now have the option to set training time with the rotary knob.

4. Using the rotary knob, select the training time and confirm the setting with a single push of the rotary knob or press the START/STOP button to directly start your training.

(i) NOTICE

During training it is possible to change the resistance level with the rotary knob.

- 5. To pause the program, press the START/STOP button again.
- 6. To end the program, press the RESET button.

3.8 H.R.C. (Heart rate controlled programs)

↑ WARNING

This crosstrainer is not medical equipment. The heart rate measurement of the crosstrainer can be unprecise. Different factors can influence the heart rate reading. The heart rate readings are only meant as a guide for training.

There are three heart rate programs available to choose from. You can choose from one of the three pre-set target heart rate programs (55%, 75% or 90% of your maximum heart rate) or choose TARGET and manually set a target heart rate value. Your maximum heart rate is calculated by the console and is dependant on your age set. We recommend using a chest heart rate sensor (chest strap) for this program.



- In the main menu select H.R.C. and confirm your choice with a single push of the rotary knob. 1.
- Using the rotary knob select one of the pre-set target heart rate programs or TARGET and 2. confirm your choice with a single push of the rotary knob.
- If you have selected TARGET, use the rotary knob select a target heart rate and confirm your 3. setting with a single push of the rotary knob.

(i) NOTICE

The pre-set TARGET value is 100.

- 3.1. Optionally you can also set a time and confirm this with a single push of the rotary knob.
- To start the program, press the START/STOP button and hold the hand pulse sensors in your hands or alternatively you can use an optional chest strap.

Your current heart rate will be displayed during training.

NOTICE **(i)**

If no heart rate is detected, the display will show:



- 5. To pause the program, press the START/STOP button again.
- 6. To end the program, press the RESET button.

3.9 WATT (Watt program)

- 1. In the main menu select WATT and confirm your choice with a single push of the rotary knob.
- 2. Using the rotary knob, select a Watt value and confirm your setting with a single push of the rotary knob.



(i) NOTICE

The pre-set value is 120.

3. Using the rotary knob select the training time and confirm the setting with a single push of the rotary knob or press the START/STOP button to directly start your training.

(i) NOTICE

The resistance level changes automatically to the set Watt value.

- 4. To pause the program, press the START/STOP button again.
- 5. To end the program, press the RESET button.

3.10 RECOVERY (Recovery function)

Use the recovery function after a training session to measure your recovery heart rate.

To start the recovery function, press the RECOVERY button and hold the hand pulse sensors or alternatively use an optional chest strap.

The display shows a countdown that runs from 00:60 to 00:00.



If you wish to prematurely end the recovery function, press the RECOVERY button again.



Based on the final pulse readings, once the countdown ends you'll receive a fitness grade from F1 to F6.

| F1 | Very good | |
|----|-----------|--|
| F2 | Good | |
| F3 | Average | |
| F4 | Adequate | |
| F5 | Bad | |
| F6 | Very bad | |

3.11 BODY FAT (Body fat analysis)

- 1. Choose your user profile (U1-U4).
- 2. To start the body fat analysis, in the main menu press the BODY FAT button and hold on to the hand pulse sensors.

(i) NOTICE

Should you not properly grip the hand pulse sensors, the display will show the error code E-1.

(i) NOTICE

If you wish to prematurley end the body fat analysis and return to the previous program, press the BODY FAT button again.

After successfully ending the test you'll be shown your body fat ratio (FAT%) and your BMI.

(i) NOTICE

Should you body fat ratio be outside of the 5% - 50%, the display will show the error code E-4.





3.12 Bluetooth and Fitness Apps

This console is equipped with a bluetooth interface. Please take note that your mobile device needs to be compatible with the bluetooth interface of the equipment (bluetooth 4.0).

To use training apps you will have to activate the bluetooth function on your mobile device (tablet or smart phone) and start the fitness app. Select your fitness equipment. Please follow the instructions given in the app. You will find the name of your fitness euqipment on a small sticker on the back of the console.

You will find the fitness apps in the app stores of Google or Apple. There you will find the apps "Kinomap" or "iConsole+". Please note that these apps are produced by an external manufacturer. Sport-Tiedje does not take any responsibility regarding the availability, functionality or contents of these programmes.













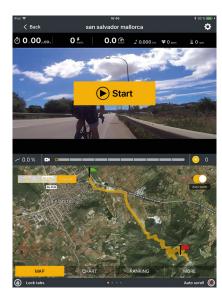

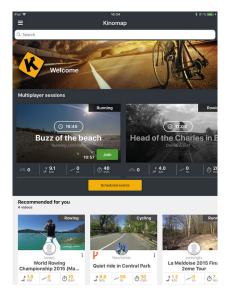

Example: Kinomap

4.1 General Instructions

ATTENTION

+ Make sure that the equipment is protected from moisture, dust and dirt in the selected storage location. The storage location should be dry and well ventilated and have a constant ambient temperature between 5°C and 45°C.

↑ WARNING


- + The storage location should be chosen so that improper use by third parties or children can be prevented.
- + If your equipment does not have transportation wheels, the equipment must be disassembled before transportation.

4.2 Transportation Wheels

ATTENTION

If you want to transport your equipment over particularly sensitive and soft floor coverings, such as parquet, planks or laminate, lay out the transport route with cardboard or similar to avoid possible floor damage.

- 1. Stand behind the equipment and lift it until the weight is transferred to the transportation wheels. After that, you easily can move the equipment to a new position. For long transport distances the equipment should be disassembled and safely packed.
- 2. Select the new location by following the instructions in the section 1.4 of this manual.

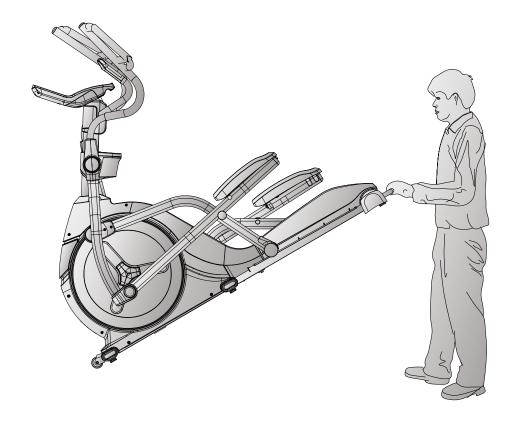

5.1 General Instructions

MARNING

+ Do not make any improper changes to the equipment.

CAUTION

+ Damaged or worn components may affect your safety and the life of the equipment. Therefore, immediately replace damaged or worn components. In such a case, contact the contract partner. The equipment must not be used until it has been repaired. If necessary, use only original spare parts.

ATTENTION

In addition to the instructions and recommendations for maintenance and care given here, additional service and/or repair work may be necessary; this must only be carried out by authorised service technicians.

5.2 Faults and Fault Diagnosis

The equipment undergoes regular quality controls during production. Nevertheless, faults or malfunctions may occur. Frequently, individual parts are responsible for these disturbances, an exchange is usually sufficient. Please refer to the following overview for the most common errors and how to correct them. If the equipment still does not function properly, contact your contract partner.

| Fault | Cause | Solution | |
|---|--|---|--|
| The drive disc is wobbling or producing noises | Drive disc is loose | Tighten the nut | |
| Display doesn't function | Cables not properly connected | Check all cable connections | |
| Pedals are squeaking | Pedals are loose | Tighten the screws in the pedals | |
| Squeaking noises | Screws have loosened | Check that all the screws are tightened | |
| Rails are squeaking | The rails and/or wheels are dirty or the rails are dry | Clean the rails and wheels Re-lubricate the rails with fat-free silicon | |
| + Source of interference in the room + Chest strap is not compatible + Position of the chest strap is incorrect + Batteries are empty | | Eliminate the source of interference (e.g. Mobile, Speakers, etc.) Use a compatible chest strap (see recommended accessories) Re-position the chest strap and/or moisten the electrode(s) Change the batteries | |

5.3 Error codes and troubleshooting

The electronics of the crosstrainer are continually running tests. In case of deviations, an error code is shown on the display and normal operation is stopped for your safety.

- + E-1 No values were received during the body fat analysis. Make sure that, during the analysis, you hold on to the hand pulse sensors with both hands.
- + E-4 The user settings entered for age, height, weight or the body fat ratio is outside of the setting range.

5.4 Maintenance and inspection calendar

To avoid damages from sweat, the crosstrainer must be cleaned with a damp towel (no solvents!) after each training session.

The following routine tasks must be performed at the specified intervals:

| Part | Weekly | Monthly | Quarterly |
|--|--------|---------|-----------|
| Display console | С | I | |
| Slide rails* | | С | |
| Lubrication of slide rails and moving parts* | | | I |
| Plastic covers | С | I | |
| Screws and cable connections | | I | |
| Legend: C = clean; I = inspect | | | |

^{*}Make sure to always clean the slide rails and moving parts before re-lubricating.

By scanning the QR code with the camera function or QR code scanner app of your smartphone/tablet, a video on general maintenance of a crosstrainer opens on YouTube. The video serves to illustrate the maintenance points described in this manual.

Please note that the video may not be available in your language or with appropriate subtitles.

If you cannot scan QR codes, you can access all Sport-Tiedje videos on YouTube by first opening YouTube and entering "Sport-Tiedje" in the search field.



6

DISPOSAL

At the end of its operational life, this equipment cannot be disposed of in normal household waste. Instead, it must be disposed of via an electricals recycling centre. Further information can be obtained from your local authority's recycling service.



The materials can be recycled as per their symbols. Through the reuse, recycling of materials or other forms of recovery of old equipment, you make an important contribution to the protection of the environment.

RECOMMENDED ACCESSORIES

To make your training experience even more efficient and pleasant, we recommend that you add suiting accessories to your fitness equipment. This could be a floor mat, for example, which makes your fitness equipment stand more securely and also protects the floor from falling sweat, but it could also be additional handrails on some treadmills or silicone spray to keep moving parts in good shape.

If you have purchased a fitness machine with pulse training and want to train your heart rate, we strongly recommend that you use a compatible chest strap, as this ensures optimum transmission of the heart rate. You may want to buy additional grips or weights for multi gyms.

Our range of accessories offers the highest quality and makes training even better. If you would like to find out more about compatible accessories, please go to the detail page of the product in our webshop (the easiest way is to enter the article number in the search field above) and go to the



recommended accessories on this page. Alternatively, you can use the QR code provided. Of course, you can also contact our customer service: by telephone, e-mail, in one of our branches or via our social media channels. We will be happy to advise you!




8.1 Serial Number and Model Name

In order to provide you with the best possible service, please have the model name, article number, serial number, exploded drawing and parts list ready. The corresponding contact options can be found in chapter 10 of this operating manual.

(i) NOTICE

The serial number of your equipment is unique. It's located on a white sticker. The exact position of this sticker is shown in the following illustration.

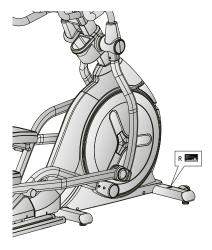

Enter the serial number in the appropriate field.

| Serial number: | | |
|-----------------------------------|--|--|
| | | |
| | | |
| Brand / Category: | | |
| Taurus / Cross-Elliptical Trainer | | |
| | | |
| Model Name: | | |
| FX9.9 | | |
| | | |
| Article Number: | | |
| TF-FX99 | | |

8.2 Parts List

| No. | Name | Supplier Part No. | Specification | Qty. |
|-----|---|-------------------|------------------|------|
| 1 | main frame | 747S1-3-1000-J0 | | 1 |
| 2 | front stabilizer | 747S0-3-2100-J0 | | 1 |
| 3 | hex bolt | 50108-5-0120-F5 | M8*1.25*120L,8.8 | 2 |
| 4 | spring washer | 55108-2-1520-FA | D15.4xD8.2x2T | 16 |
| 5 | hex bolt | 50108-5-0070-F4 | M8*1.25*70L,8.8 | 2 |
| 6 | allen bolt | 54008-5-0020-F0 | M8*1.25*20L,8.8 | 4 |
| 7 | flat washer | 55108-1-1612-FA | D16*D8.5*1.2T | 4 |
| 8 | allen bolt | 50308-5-0050-F3 | M8*1.25*50L,8.8 | 6 |
| 9 | curved washer | 55108-3-2215-FA | D22xD8.5x1.5T | 6 |
| 10 | anti-loose nut | 55208-1-2008-FA | M8*1.25*8T | 8 |
| 11 | handlebar post welding | 747A2-3-2000-J0 | | 1 |
| 12L | supporting tube for left movable handlebar | 747S0-3-3710-J0 | | 1 |
| 12R | supporting tube for right movable handlebar | 747S0-3-3711-J0 | | 1 |
| 13L | left handlebar welding set | 747S0-3-2430-J1 | | 1 |
| 13R | right handlebar welding set | 747S0-3-2450-J1 | | 1 |
| 14L | left pedal bottom tube welding set | 747A2-3-3810-J0 | | 1 |
| 14R | right pedal bottom tube welding set | 747A2-3-3811-J0 | | 1 |
| 15L | bracket for left pedal | 747S0-3-6000-J2 | | 1 |
| 15R | bracket for right pedal | 747S0-3-6025-J2 | | 1 |
| 16 | pedal bottom bracket welding set | 747S0-3-3804-J2 | | 2 |
| 17 | foot tube sealing piece | 747S0-6-2108-J0 | 104*63*4T | 4 |
| 18 | crank welding set | 747S0-3-2700-J1 | | 2 |
| 19 | computer | 747S1-6-2501-B0 | SE-8627-71 | 1 |
| 20 | sliding beam guiding plate | 747A2-6-5171-00 | 126.9*720L*2.3T | 2 |
| 21 | adjustable wheel | 74202-6-2174-N0 | D50*M10*1.5 | 6 |
| 22 | allen nut | 55210-2-2008-NA | M10*1.5*8T | 6 |
| 23 | fixing plate for idle wheel | 747S0-3-1600-00 | | 1 |
| 24 | electric magnetic system | 747S0-3-3102-01 | D265*153*50, SKF | 1 |
| 25 | crank axle welding set | 747S0-3-2903-00 | | 1 |
| 26 | pulley Wheel | 58008-6-1036-D0 | D350*29.9*3T | 1 |
| 27 | multi-groove Belt | 58004-6-1110-00 | 520 PJ8 | 1 |
| 28 | C key | 75000-6-3107-01 | 8*7*20L | 2 |


| 29L | left chain | 747S0-6-4501-B0 | 734.4*878.2*98.1 | 1 |
|-----|-----------------------------------|-----------------|-------------------|----|
| 29R | right chain | 747S0-6-4502-B0 | 734*878.2*105.2 | 1 |
| 30L | left front chain cover | 747S0-6-4529-B1 | 459.7*225.5*87.2 | 1 |
| 30R | right front chain cover | 747S0-6-4530-B1 | 459.7*225.5*93.8 | 1 |
| 31 | front decorative cover | 747S0-6-4523-B0 | 168.9*175.2*170.8 | 1 |
| 32 | upper decorative cover | 747S0-6-4520-B0 | 639*313.7*176.5 | 1 |
| 33 | rear decorative cover | 747A2-6-4521-B0 | 217.5*177.1*144.6 | 1 |
| 34 | round chain | 747S0-6-4506-B0 | D632.9*36.7 | 2 |
| 35 | side cap | 747S0-6-4582-C0 | 148*130.3*16.1 | 2 |
| 36 | cover for rear stabilizer | 747S0-6-4542-B1 | 566.9*109.3*144.3 | 1 |
| 37 | inside cover for rear stabilizer | 747S0-6-4543-B0 | 503.5*59*44.6 | 1 |
| 38 | water bottle holder(front)(black) | 747S0-6-2091-B0 | 195*159*71.8 | 1 |
| 39 | water bottle holder(rear)(black) | 747S0-6-2092-B0 | 195*167.1*159.4 | 1 |
| 40 | water bottle holder | 747S0-6-2074-B0 | 113*138.3*120.5 | 1 |
| 41 | upper handle pulse cover | 747S0-6-2517-B0 | 184.5*20.8*50 | 2 |
| 42 | lower handle pulse cover | 747S0-6-2518-B0 | 184.5*35.2*50 | 2 |
| 43L | left dipped foam | 58015-6-1386-B0 | D38*4T | 1 |
| 43R | right dipped foam | 58015-6-1387-B0 | D38*4T | 1 |
| 44 | pedal | 58029-6-1147-B0 | 434.2*210.7*84 | 2 |
| 45 | pedal pad | 75000-6-3896-B0 | 379*168.5*5T | 2 |
| 46 | bearing | 58006-6-1057-00 | #6205ZZ,NBK | 2 |
| 47 | allen bolt | 54010-8-0065-F6 | M10*1.5*65L,12.9 | 2 |
| 48 | hex nut | 55210-A-2008-FA | M10*1.5*8T, 8.8 | 4 |
| 49 | spacer | 75000-6-2781-00 | D32*D25.2*9T | 1 |
| 50 | hex bolt | 50108-2-0020-U0 | M8*1.25*20L | 8 |
| 51 | flat washer | 55108-1-2520-FA | D25*D8.5*2T | 20 |
| 52 | buffer | 739S0-6-1081-B0 | D27*D8.2*2.5T | 6 |
| 53 | sleeve | 747S0-6-2707-00 | D30*D25.2*45L | 1 |
| 54 | fixing nut | 75000-6-2807-N0 | M25*1.5*32*6T | 2 |
| 55 | allen screw | 54006-5-0010-F0 | M6*1.0*10L,8.8 | 2 |
| 56 | flat washer | 55106-1-2820-FA | D28*D6.5*2T | 2 |
| 57 | allen screw | 54006-5-0015-D0 | M6*1.0*15L,8.8 | 4 |
| 58 | flat washer | 55106-1-1310-NA | D13*D6.5*1.0T | 4 |
| 59 | spring washer | 55106-2-1013-NA | D10.5*D6.1*1.3T | 4 |
| 60 | movable axle | 74750-6-3771-00 | D25*180.5L | 2 |

| | | 1 | I | ī |
|-----|---|------------------|---------------------|----|
| 61 | moving wheel | 73800-6-3886-B3 | D70*43 | 4 |
| 62 | bearing | 58006-6-1032-00 | 6002 ZZ | 8 |
| 63 | moving wheel cover | 747S0-6-3897-B0 | 162*136.2*87 | 2 |
| 64 | front handlebar protective cover(black) | 747S0-6-3780-B0 | 240.5*127.8*59 | 2 |
| 65 | rear handlebar protective cover(black) | 747S0-6-3781-B0 | 240.5*127.8*50 | 2 |
| 66 | bearing | 58006-6-1017-00 | #6004ZZ | 12 |
| 67 | sleeve(2) | 747S0-6-2788-00 | D25.4*D20.2*44L | 2 |
| 68L | front foot cover (left)(black) | 747S0-6-3775-B0 | 152.3*91.1*46.7 | 2 |
| 68R | front foot cover (right)(black) | 747S0-6-3776-B0 | 152.3*91.1*60 | 2 |
| 69 | bushing | 58002-6-1028-UC2 | D29*D12.1*9T | 4 |
| 70 | liner | 747S0-6-2973-00 | D25.4*D20.2*26L | 2 |
| 71 | front pedal axle cover | 747S0-6-3880-B0 | 182.4*95.7*67.6 | 2 |
| 72 | allen screw | 50412-8-0070-F4 | M12*1.75*70L, 12.9 | 4 |
| 73 | flat washer | 55112-1-2425-FA | D24*D13.5*D2.5T | 8 |
| 74 | anti-loose nut | 55212-1-2012-FA | M12*1.75*12T | 4 |
| 75 | bearing | 58006-6-1031-00 | #2203-2RS | 2 |
| 76 | c-clip | 55540-3-0018-D0 | S-40(1.8T) D40 | 2 |
| 77 | bushing | 58002-6-1092-00 | D19*D17*D12*20T | 4 |
| 78 | sleeve | 74750-6-5202-01 | D25.4*D20.2*31L | 2 |
| 79 | cross screw | 52606-2-0015-N0 | M6*1*15L | 8 |
| 80 | cross screw | 52842-2-0015-F0 | ST4.2*15L | 8 |
| 81 | c-clip | 55517-1-0010-00 | S-17(1T) | 1 |
| 82 | waved washer | 55117-5-2203DA | D17*D22*0.3T | 3 |
| 83 | bearing | 58006-6-1026-01 | 6203-2RS | 2 |
| 84 | anti-loose nut | 55208-1-2008-NA | M8*1.25*8T | 1 |
| 85 | flat washer | 55108-1-2115-CA | D21*D8.5*1.5T | 1 |
| 86 | hex nut | 55208-2-2006-NA | M8*1.25*6T | 1 |
| 87 | hex bolt | 50108-5-0030-C4 | M8*1.25*30L,8.8,20L | 1 |
| 88 | plastic washer | 55110-1-5010-BF | D50*D10*1.0T | 1 |
| 89 | anti-loose nut | 55206-1-2006-CA | M6x1.0x6T | 2 |
| 90 | hex bolt | 50106-2-0075-N0 | M6*75L | 1 |
| 91 | fixing plate | 815G0-6-1673-N0 | 20*27*4T | 2 |
| 92 | hex bolt | 50106-5-0015-C0 | M6x1.0x15L, 8.8 | 2 |
| 93 | hex nut | 55206-2-2005-NA | M6*1*5T | 3 |
| 94 | hex bolt | 50108-5-0020-C0 | M8x1.25x20L,8.8 | 4 |

| 95 | anti-loose nut | 55208-1-2008-CA | M8*1.25*8T | 4 |
|-----|-------------------------------|------------------|---------------------|----|
| 96 | cross screw | 52842-2-0015-F0 | ST4.2*15L | 61 |
| 97 | cross screw | 52605-5-0012-F0 | M5*0.8*12L,8.8 | 37 |
| 98 | computer bracket(front) | 747S0-6-2592-B0 | 196.4*109.5*49.1 | 1 |
| 99 | computer bracket(rear) | 747S0-6-2593-B0 | 196.3*109.5*96.4 | 1 |
| 100 | upper computer cable | 747S0-6-2572-00 | 300L | 1 |
| 101 | middle computer cable | 747S0-6-2587-00 | 900L | 1 |
| 102 | lower computer cable | 747S0-6-2573-00 | 1050L | 1 |
| 103 | system connect cable | 820S0-6-3177-00 | 350L | 1 |
| 104 | sensor cable | 805S0-6-2576-00 | 500L | 1 |
| 105 | round magnet | 174R4-6-2574-00 | M02 | 1 |
| 106 | quick key upper cable(1) | 747S0-6-2542-00 | 300L | 1 |
| 107 | quick key upper cable(2) | 747S0-6-2539-00 | 300L | 1 |
| 108 | quick key lower cable(1) | 747S0-6-2544-00 | 850L | 1 |
| 109 | quick key lower cable(1) | 747S0-6-2536-00 | 850L | 1 |
| 111 | control board | 747\$1-6-2597-00 | | 1 |
| 112 | switching mode power supplier | 26100-6-2411-00 | | 1 |
| 113 | socket | 26100-6-2413-00 | | 1 |
| 114 | live wire (1) | 26200-6-1789-00 | 220L | 1 |
| 115 | neutral wire(2) | 26200-6-1792-00 | 220L | 1 |
| 116 | grounding cable(2) | 26200-6-1788-00 | 150L | 2 |
| 117 | electric cable | 26100-6-1775-02 | 1700L | 1 |
| 118 | computer back cover | 747S0-6-2529-B0 | 337.6*225.5*58.4 | 1 |
| 119 | allen bolt | 54008-5-0025-F0 | M8*1.25*25L,8.8 | 4 |
| 120 | allen bolt | 50308-5-0040-F3 | M8*1.25*40L,8.8 | 2 |
| 121 | transporting wheel | 84302-6-2175-00 | D70.5*23 | 2 |
| 122 | bushing | 58002-6-1099-00 | D22.2*D8.2*7T | 4 |
| 123 | cross screw | 54203-2-0030-F0 | M3*0.5*30L | 4 |
| 124 | cross screw | 54203-2-0012-F0 | M3*0.5*12L | 2 |
| 125 | oval square | 55315-3-3060-B8 | 30*60*15 | 2 |
| 126 | buffer | 747S0-6-1081-B0 | D21*D8.2*2.5T | 4 |
| 127 | spacer | 747S0-6-3892-00 | D19*D15.2*25.5L | 4 |
| 128 | cross screw | 52606-2-0015-F0 | M6*1*15L | 8 |
| 129 | oval square | 55328-3-2550-B1 | 25*50*28L,1.5T tube | 4 |
| 130 | square cap | 55350-1-0015-B8 | D50.8*15 | 2 |

| 143 | rear cover | 747A2-6-4514-B0 | 766.7*169.6*144.3 | 1 |
|-----|-----------------------------|------------------|-------------------------------|---|
| 144 | pin | 71600-6-4586-60 | D6*26.5*7.7 | 2 |
| 145 | cross screw | 52804-2-0012-F0 | ST4*1.41*12L | 3 |
| 146 | rear stabilizer welding set | 747A2-3-2112-J0 | | 1 |
| 147 | hex bolt | 50108-5-0055-F3 | M8*1.25*55L,8.8 | 4 |
| 148 | hex bolt | 50108-5-0035-F3 | M8*1.25*35L,8.8 | 4 |
| 150 | buffer | 55308-4-0010-BB | D20*10L*M8*1.25 | 2 |
| 153 | bushing | 58002-6-1051-B0 | D19.15x(D25.6x32) xL(17+3) | 6 |
| 154 | allen bolt | 50308-5-0020-UF0 | M8*1.25*20L,8.8 | 4 |
| 155 | slide beam welding set | 747A2-3-5100-J1 | | 1 |
| 156 | ball cap | 55338-1-0031-B8 | D38*31L | 4 |
| 157 | square cap | 55312-2-2550-B8 | 25*50*12L,2.0 tube | 2 |
| 158 | incline | 747A2-6-5172-00 | JS17-B | 1 |
| 159 | hex bolt | 50110-2-0075-F3 | M10*1.5*75L | 2 |
| 160 | hex bolt | 50110-2-0145-F6 | M10*1.5*145L | 1 |
| 161 | flat washer | 55110-1-2020-FA | D20*D11*2T | 3 |
| 162 | anti-loose nut | 55210-1-2010-FA | M10*1.5*10T | 3 |
| 163 | bolt cover | 19100-6-3172-B0 | D35*8 | 2 |
| 164 | circumgyrate axle | 747A2-6-2751-00 | D19*490.5L | 1 |
| 165 | incline control cable(1) | 747A2-6-3481-00 | 500L | 1 |
| 166 | incline control cable(2) | 747A2-6-3482-00 | 500L | 1 |
| 167 | VR control cable | 747A2-6-3475-00 | 500L | 1 |
| 171 | neutral wire | 747A2-6-3479-00 | 900L | 1 |
| 172 | live wire | 747A2-6-3480-00 | 900L | 1 |
| 176 | computer Fixing Plate | 747A2-3-2725-J0 | | 1 |
| 177 | signal upper cable | 747S1-6-2563-00 | 300L | 1 |
| 178 | signal middle cable | 747S1-6-3486-00 | 900L | 1 |
| 179 | signal lower cable | 747S1-6-2564-00 | 1150L | 1 |
| 180 | button membran | 747S1-6-2534-00 | D39 | 1 |
| 181 | button membran | 747S1-6-2533-00 | D39 | 1 |
| / | allen spanner | 58030-6-1031-D1 | M6 8.8 | 1 |
| / | open spanner | 58030-6-1050-C0 | 153*6.5T | 1 |
| / | spanner | 58030-6-1005-N2 | 121*D6 | 1 |
| | allen spanner | 58030-6-1033-N0 | M10 | 1 |

8.3 Exploded Drawing

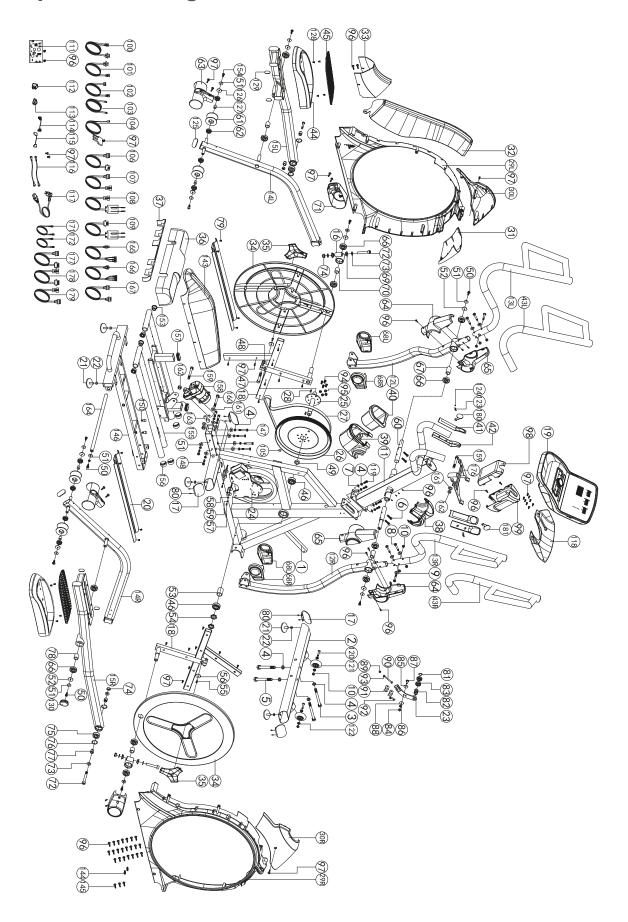

9 WARRANTY

Training equipment from Taurus® is subject to strict quality control. However, if a fitness equipment purchased from us does not work perfectly, we take it very seriously and ask you to contact our customer service as indicated. We are happy to help you by phone via our service hotline.

Error Descriptions

Your fitness equipment is developed for long-term, high-quality training. However, should a problem arise, please first read the operating instructions. For further assistance, please contact your contract partner or call our service hotline. To ensure your problem is solved as quickly as possible, please describe the defect as exactly as possible.

In addition to the statutory warranty, we provide a warranty for every fitness equipment purchased from us according to the following provisions.

Your statutory rights are not affected.

Warrantee

The warrantee is the first/original buyer and/or any person who received a newly purchased product as a gift from the original buyer.

Warranty period

The warranty periods, shown on our web shop, begin on delivery of the fitness equipment. The respective warranty periods for your equipment can be found on its product website.

Repair Costs

According to our choice, there will either be a repair, a replacement of individual damaged parts or a complete replacement. Spare parts, that have to be mounted while assembling the equipment, have to be replaced by the warrantee personally and are not a part of repair. After the expiration of the warranty period for repair costs, a pure parts warranty applies, which does not include the repair, installation and delivery costs.

The terms of use are defined as follows:

- + Home use: solely for private use in private households up to 3 hours per day
- + Semi-professional use: up to 6 hours per day (e. g. rehabilitation centres, hotels, clubs, company gyms)
- + Professional use: more than 6 hours per day (e. g. commercial gyms)

Warranty Service

Within the warranty period, equipment which develops faults as a result of material or manufacturing defects, will be repaired or replaced at our discretion. Ownership of equipment or parts of equipment which have been replaced is transferred to us. The warranty period is not extended nor does a new warranty period begin following repair or replacement under the warranty.

Warranty Conditions

For the warranty to be valid, the following steps must be taken:

Please contact our customer service by email or phone. If the product under warranty has to be sent in for repair, the seller bears costs. After expiry of the warranty, the buyer bears the costs of transport and insurance. If the fault is covered by our warranty, you will receive a new or repaired equipment in return.

Warranty claims are invalid in case of damage resulting from:

- + misuse or improper handling
- + environmental influences (moisture, heat, electrical surge, dust, etc.)
- + failure to follow the current safety measures for the equipment
- + failure to follow the operating instructions
- + use of force (e. g. hitting, kicking, falling)
- + interventions which were not carried out by one of our authorized service centres
- + unauthorised repair attempts

Proof of Purchase and Serial Number

Please make sure that you are able to provide the appropriate receipt when claiming on your warranty. So that we can clearly identify the model of your equipment, and for the purposes of our quality control, you will need to give the serial number of your equipment, when contacting the service team. Where possible please have your serial number and your customer number ready when you call our service hotline. It will help us to deal with your request swiftly.

If you cannot find the serial number on your fitness equipment, our service team is at your disposal to offer further information.

Service outside of the Warranty Period

We are also happy to issue an individual cost estimate if there is a problem with your fitness equipment after the warranty has expired, or in cases which do not fall under the terms of the warranty, e. g. normal wear and tear. Please contact our customer service team to find a quick and cost-effective solution to your problem. In such a case you will be responsible for the delivery costs.

Communication

Many problems can be solved just by speaking to us as your specialist supplier. We know how important it is to you as a user of the fitness equipment to have problems solved quickly and simply, so you can enjoy working out with minimal interruption. For that reason, we also want to resolve your queries quickly and in a straightforward manner. Thus, please always keep your customer number and the serial number of the faulty equipment handy.

| DE | DK | FR |
|--|--|--|
| TECHNICAL SUPPORT | TECHNICAL SUPPORT & SERVICE | TECHNICAL SUPPORT & SERVICE |
| +49 4621 4210-900 +49 4621 4210-698 technik@sport-tiedje.de Mo - Fr 08:00 - 18:00 Sa 09:00 - 18:00 | № 80 90 16 50 +49 4621 4210-945 Info@fitshop.dk Mo - Fr 08:00 - 18:00 Sa 09:00 - 18:00 | +33 (0) 172 770033 +49 4621 4210-933 service-france@fitshop.fr Mo - Fr 08:00 - 18:00 Sa 09:00 - 18:00 |
| SERVICE 0800 20 20277 (Freecall) | PL TECHNICAL SUPPORT & SERVICE | BE TECHNICAL SUPPORT & SERVICE |
| info@sport-tiedje.de Mo - Fr 08:00 - 21:00 Sa 09:00 - 21:00 So 10:00 - 18:00 | 22 307 43 21 +49 4621 42 10-948 info@fitshop.pl Mo - Fr 08:00 - 18:00 Sa 09:00 - 18:00 | 02 732 46 77 +49 4621 42 10-932 info@fitshop.be Mo - Fr 08:00 - 18:00 Sa 09:00 - 18:00 |

| UK | NL | INT |
|---------------------------------|---|------------------------------------|
| TECHNICAL SUPPORT | TECHNICAL SUPPORT & SERVICE | TECHNICAL SUPPORT & SERVICE |
| & +44 141 876 3986 | & +31 172 619961 | & +49 4621 4210-944 |
| support@powerhousefitness.co.uk | info@fitshop.nl | service-int@sport-tiedje.de |
| SERVICE +44 141 876 3972 | Ma - Do 09:00 - 17:00 Vr 09:00 - 21:00 Za 10:00 - 17:00 | Mo - Fr 8am - 6pm Sat 9am - 6pm |
| Mo - Fr 9am - 5pm | AT | CH |
| | | |

Please find a detailed overview including address and opening hours for all stores of the Sport-Tiedje Group in Germany and abroad on the following website:

www.sport-tiedje.com/en/stores

WE LIVE FITNESS

WEBSHOP AND SOCIAL MEDIA

Sport-Tiedje is Europe's largest specialist store for home fitness equipment with currently 80 stores and one of the world's most renowned online mail order companies for fitness equipment. Private customers order via the 25 web shops in the respective national language or have their desired equpiment assembled on site. In addition, the company supplies fitness studios, hotels, sports clubs, companies and physio practices with professional equipment for endurance and strength training.

Sport-Tiedje offers a wide range of fitness equipment from renowned manufacturers, high-quality in-house developments and comprehensive services, such as a build-up service and sports scientific advice before and after the purchase. The company employs numerous sports scientists, fitness trainers and competitive athletes.

Visit us also on our social media platforms or our blog!



