


TAURUS®

Assembly and Operating Instructions




max. 180 kg

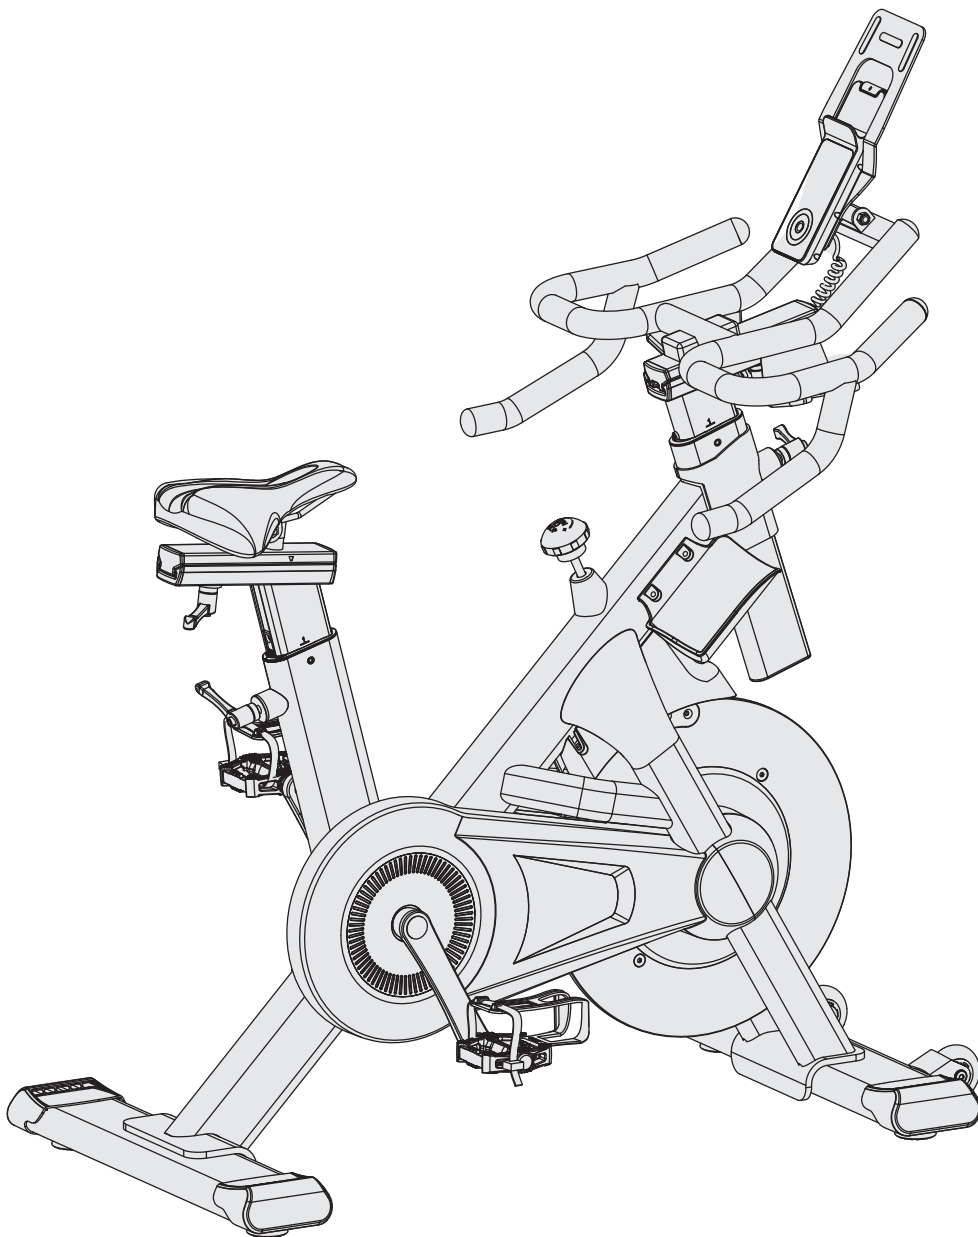

~ 60 Min. 



 51 kg
L 117 | W 58 | H 143

FSTFIC90P.01.03

Art. No. TF-IC90P

Taurus IC90 Pro

Content

| | | |
|----------|--|-----------|
| 1 | GENERAL INFORMATION | 8 |
| 1.1 | Technical Data | 8 |
| 1.2 | Personal Safety | 9 |
| 1.3 | Electrical Safety | 10 |
| 1.4 | Set-Up Place | 11 |
| 2 | ASSEMBLY | 12 |
| 2.1 | General Instructions | 12 |
| 2.2 | Scope of Delivery | 13 |
| 2.3 | Assembly | 15 |
| 3 | OPERATING INSTRUCTIONS | 22 |
| 3.1 | Console Display | 22 |
| 3.2 | Button Functions | 23 |
| 3.3 | Turning on the Console and Standby Mode | 24 |
| 3.4 | Manual Mode | 24 |
| 3.5 | Recovery Function | 26 |
| 3.6 | Resistance Calibration | 26 |
| 3.7 | Wireless Connection and Fitness Apps | 27 |
| 4 | STORAGE AND TRANSPORT | 28 |
| 4.1 | General Instructions | 28 |
| 4.2 | Transportation Wheels | 28 |
| 5 | TROUBLESHOOTING, CARE AND MAINTENANCE | 29 |
| 5.1 | General Instructions | 29 |
| 5.2 | Faults and Fault Diagnosis | 29 |
| 5.3 | Error Codes and Troubleshooting | 30 |
| 5.4 | Maintenance and Inspection Calendar | 31 |
| 6 | DISPOSAL | 31 |
| 7 | RECOMMENDED ACCESSORIES | 32 |
| 8 | ORDERING SPARE PARTS | 33 |
| 8.1 | Serial Number and Model Name | 33 |
| 8.2 | Parts List | 34 |
| 8.3 | Exploded Drawing | 38 |

| | | |
|----|----------|----|
| 9 | WARRANTY | 39 |
| 10 | CONTACT | 41 |

Dear customer,

Thank you for choosing a high-quality equipment of the brand TAURUS®. Taurus offers sports and fitness equipment for the sophisticated home sport and the equipment of fitness studios and business customers. With Taurus fitness equipment, the focus is on what sport is all about: maximum performance! Therefore, the equipment is developed in close consultation with athletes and sports scientists. Because athletes know best what makes perfect fitness equipment.

Further information can be found at www.fitshop.com.

Intended Use

The equipment may only be used for its intended purpose.

This fitness equipment is suitable for home use, semi-professional use and commercial or professional use. The semi-professional sector includes, for example, institutional facilities such as hospitals, schools, hotels and associations. Professional use refers to commercial use, e.g. in a fitness studio.

Legal Notice

Fitshop GmbH
Europe's No. 1 for home fitness

International Headquarters
Flensburger Straße 55
24837 Schleswig
Germany

Management:
Christian Grau
Sebastian Campmann
Dr. Bernhard Schenkel
No. HRB 1000 SL
Local Court Flensburg
European VAT Number: DE813211547

Disclaimer

© TAURUS is a registered brand of the company Fitshop GmbH. All rights reserved. Any use of this trademark without the explicit written permission of Fitshop is prohibited.

Product and manual are subject to change. Technical data can be changed without advance notice.

FITSHOP

Europe's No.1 for Home Fitness

ABOUT THIS MANUAL

Please carefully read the entire manual before installation and first use. The manual will help you to quickly set up the system and explains how to safely use it. Make sure that all persons exercising with the equipment (especially children and persons with physical, sensory, mental or motor disabilities) are informed about this manual and its contents in advance. In case of doubt, responsible persons must supervise the use of the equipment.

Due to ongoing changes and software optimisations, the manual may have to be updated. If you notice any discrepancies during assembly or use, please refer to the manual uploaded to the webshop. The latest manual is always available there.



This equipment has been manufactured according to the latest safety knowledge. As far as possible, potential safety hazards which could cause injury have been eliminated. Make sure to carefully follow the instructions and that all parts are securely in place. If required, read through the instructions again to correct any mistakes.

Training devices must be classified according to accuracy and use. Accuracy classes are only applicable to devices that display training data.

Accuracy classes

Class A: high accuracy.

Class B: medium accuracy.

Class C: low accuracy.

The use classes explain the intended use of the training device.

Use classes

Class S (studio): professional and/or commercial use.

These training devices are intended for the use in training rooms of facilities such as sports clubs, school facilities, hotels, clubs and studios whose access and supervision is specifically regulated by the owner (person with legal responsibility).

Class H (home use): use at home.

These stationary training devices are intended for the use in private homes where access to the training device is regulated by the owner (person with legal responsibility).

Please pay close attention to the safety and maintenance instructions given here. The contract partner cannot be held liable for damage to health, accidents or damage to the equipment when it is not used in accordance with these instructions.

The following safety instructions may appear in this manual:

► **ATTENTION**

This notice indicates potentially hazardous situations which, if not avoided, may result in property damage.

⚠ **CAUTION**

This notice indicates potentially hazardous situations which, if not avoided, may result in slight or minor injuries!

⚠ **WARNING**

This notice indicates potentially hazardous situations which, if not avoided, may result in death or serious injuries!

⚠ **DANGER**

This notice indicates potentially hazardous situations which, if not avoided, will result in death or serious injuries!

ⓘ **NOTICE**

This notice indicates further useful information.

Retain these instructions in a safe place for future reference, maintenance or when ordering replacement parts.

1.1 Technical Data

LED Display:

- + Training time
- + Speed
- + Rotations per minute
- + Distance
- + Calories burned
- + Pulse (when using a compatible chest strap)
- + Watt
- + Resistance level

| | |
|--------------------|------------------|
| Resistance system: | Manual generator |
| Resistance levels: | 99 |
| Flywheel mass: | 13 kg |

| | |
|--------------------------------|-------------|
| Wattage | |
| Min. and max. watt at 60 RPM: | 19 - 650 W |
| Min. and max. watt at 100 RPM: | 35 - 1471 W |

Weight and dimensions:

| | |
|--|-----------------------------|
| Article weight (gross, including packaging): | 56.1 kg |
| Article weight (net, without packaging): | 50.8 kg |
| Packaging dimensions (L x W x H): | 112.5 cm x 25.5 cm x 101 cm |
| Set-up dimensions (L x W x H): | 117 cm x 58 cm x 143 cm |
| Maximum user weight: | 180 kg |
| Q-factor: | 16.5 cm |
| Use class: | S |

1.2 Personal Safety

DANGER

- + Before you start using the equipment, you should consult your physician that this type of exercise is suitable for you from a health perspective. Particularly affected are persons who: have a hereditary disposition to high blood pressure or heart disease, are over the age of 45, smoke, have high cholesterol values, are overweight and/or have not exercised regularly in the past year. If you are under medical treatment that affects your heart rate, medical advice is absolutely essential.
- + Note that excessive training can seriously endanger your health. Please also note that heart rate monitoring systems can be inaccurate. If you notice any signs of weakness, nausea, dizziness, pain, shortness of breath, or other abnormal symptoms, stop exercising immediately and seek advice from your doctor if necessary.
- + The owner must communicate all warnings and instructions to the user.

WARNING

- + This equipment may not be used by children under the age of 14.
- + Children should not be allowed unsupervised access to the equipment.
- + Persons with disabilities must have a medical license and must be under strict observation when using the equipment.
- + The equipment is strictly for use by one person at a time.
- + If your equipment provides a safety key, the clip of the safety key must be attached to your clothing before starting your training. In the event of a fall, the EMERGENCY STOP of the equipment can be initiated.
- + There is a risk of injury from spinning pedals and/or an exposed flywheel in the absence of a freewheel. Never get on or off the equipment when the pedals or the flywheel are still moving. Always make sure that the pedals and the flywheel have come to a complete stop.
- + Support yourself with at least one hand on the handlebar when getting on and off the equipment. Only dismount from the equipment when the pedals have come to a complete stop.
- + Keep your hands, feet and other body parts, hair, clothing, jewellery and other objects well clear of moving parts.
- + During use, wear suitable sports clothing rather than loose or baggy clothing. When wearing sports shoes, make sure they have suitable soles, preferably made of rubber or other non-slip materials. Shoes with heels, leather soles, studs or spikes are unsuitable. Never exercise barefoot.

CAUTION

- + If your equipment needs to be connected to the power supply with a mains cable, make sure that the cable is not a potential tripping hazard.
- + Make sure that nobody is within the range of motion of the equipment during training so as not to endanger you or other persons.
- + Always tighten the pedal strap before you start training to prevent your feet from slipping.



CAUTION

- + Be aware that if adjustment devices are left protruding, they may impede the user's movement.

▶ ATTENTION

- + Do not insert any objects of any kind into the openings of the device.
- + To protect the equipment from use by unauthorised third parties, always remove the power cable (if existing) when not in use and store it in a safe place that is inaccessible to unauthorised persons (e.g. children).
- + Class B and C crank training equipment is not suitable for high accuracy purposes.

1.3 Electrical Safety



DANGER

- + In order to reduce the risk of an electric shock, always unplug the equipment from the mains socket immediately after your workout, before assembly or dismantling, and before maintenance or cleaning. Do not pull on the cable.



WARNING

- + Do not leave the equipment unattended while the mains cable is plugged into the mains socket. During your absence, the mains cable must be removed from the mains socket to prevent improper use by third parties or children.
- + If the mains cable or plug is damaged or defective, contact your contract partner. Until repair, the equipment must not be used.

▶ ATTENTION

- + The equipment requires a mains connection of 220-230 V with 50 Hz mains voltage.
- + The equipment may only be connected directly to an earthed socket using the supplied mains cable. Extension cables must conform to VDE guidelines. Always completely unwind the mains cable.
- + The socket must be protected by a fuse with a minimum fuse rating of "16 A, slow blow".
- + Do not make any changes to the mains cable or the mains plug.
- + Keep the mains cable away from water, heat, oil and sharp edges. Do not route the mains cable underneath the equipment or under a carpet or rug, and do not place any objects on top of it.
- + If your purchased item is equipped with a TFT console, software updates must be carried out regularly. Follow the instructions on the console to perform the update(s).
- + The software systems on gym equipment with TFT consoles are set up only for the pre-installed apps. Do not install any additional apps.



NOTICE

- + The pre-installed apps on TFT consoles are produced and provided by external manufacturers. Fitshop does not take any responsibility for the availability, functionality or contents of these apps.

1.4 Set-Up Place

WARNING

- + Do not place the equipment in main corridors or escape routes.

CAUTION

- + Choose a location in which to place the equipment such that there is enough free space/clearance to the front, the rear and to the sides of the equipment.
- + The training room should be well ventilated during training and not be exposed to any draughts.
- + Choose the place in which to set up the equipment such that there is enough free space/clearance to the front, the rear and to the sides of the equipment.
- + The free area in the direction from which the exercise equipment is accessed must be at least 0.6 m larger than the exercise area.
- + The set-up and mounting surface of the equipment should be flat, loadable and solid.

ATTENTION

- + The device may only be used in one building, in sufficiently tempered and dry rooms (ambient temperatures between 10°C and 35°C). The equipment should not be used outdoors or in rooms with high humidity (over 70%) like swimming pools.
- + A floor protective mat/equipment underlay can help to protect high-quality floor coverings (parquet, laminate, cork, carpets) from dents and sweat and can help to level out slight unevenness.
- + For Class S equipment, the exercise equipment may only be used in areas where access, supervision and control are specifically regulated by the owner.

2.1 General Instructions



DANGER

- + Do not leave any tools, packaging materials such as foils or small parts lying around, as otherwise there is a danger of suffocation for children. Keep children away from the equipment during assembly.



WARNING

- + Pay attention to the instructions attached to the equipment in order to reduce the risk of injuries.



CAUTION

- + Ensure to have sufficient room for movement in each direction during assembly.
- + The assembly of the equipment must be carried out by at least two adults. If in doubt, seek the help of a third technically skilled person.



ATTENTION

- + To prevent damage to the equipment and the floor, assemble the equipment on a mat or packaging board.



NOTICE

- + In order to make the assembly as simple as possible, some screws and nuts to be used can already be pre-assembled.
- + Ideally, assemble the equipment at its later set-up place.

2.2 Scope of Delivery


The scope of delivery consist of the following parts. At the beginning, check whether all parts and tools belonging to the device are included in the scope of delivery and whether damage has occurred. In the event of complaints, the contractual partner must be contacted directly.



CAUTION


If parts of the scope of delivery are missing or damaged, the assembly must not be carried out.

①

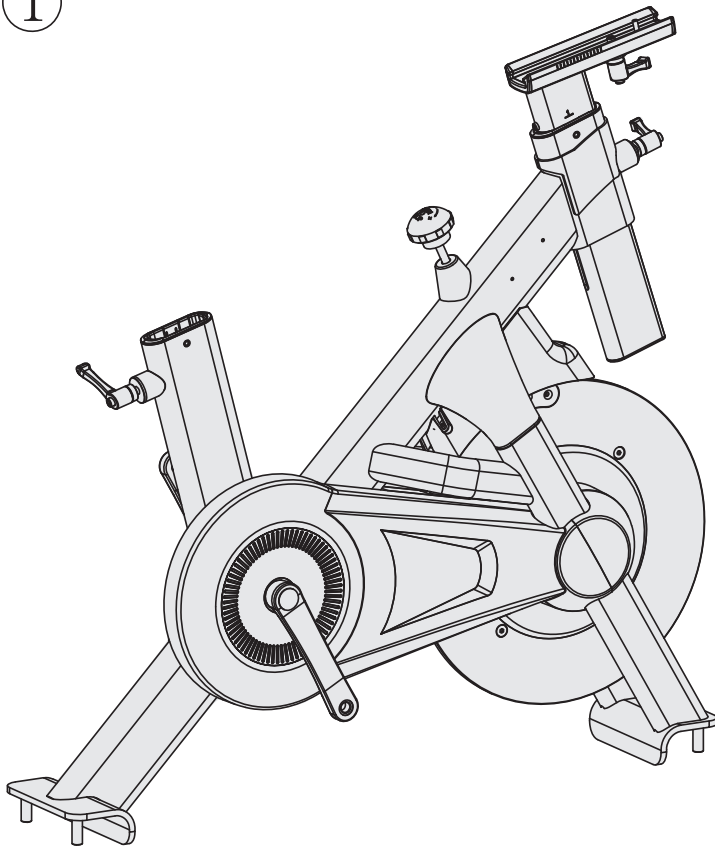


X1

④

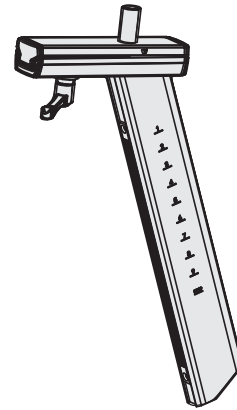


X1

⑥

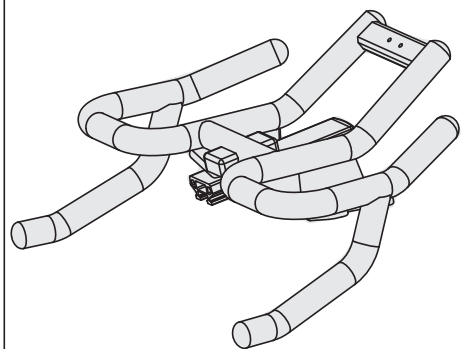


X1

⑩




X1

⑳②L & ⑳③R




X1

②



X1

⑫




⑧②L & ⑧②R



X1

③




X1

⑥①




X1

⑨



X1



X1

2.3 Assembly


Before assembly, take a close look at the individual assembly steps shown and carry out the assembly in the order given.



① NOTICE


- + First loosely screw all parts together and check that they fit properly. Tighten the screws using the tool only when you are instructed to do so.
- + If you have difficulty recognising the graphics, we recommend that you open and/or download the PDF instructions stored in the webshop on your end device (e.g. smartphone, tablet or PC). There you have the option of zooming in closer. Please note that the Adobe Acrobat Reader programme must be installed on your end device in order to open the file.

Step 1: Assembly of the Stabilizers and Bottle Holder

1. Assemble the front and rear stabilizer (2 & 3) to the main frame (1) with two Allen bolts (33) each.
2. Assemble the left and right bottle holders (82L & 82R) to the main frame (1) with two screws (69) each.



| | | | |
|----|---|-------------|----|
| 33 |  | M8x1.25x20L | x4 |
| 69 |  | ST4.2*15L | x4 |

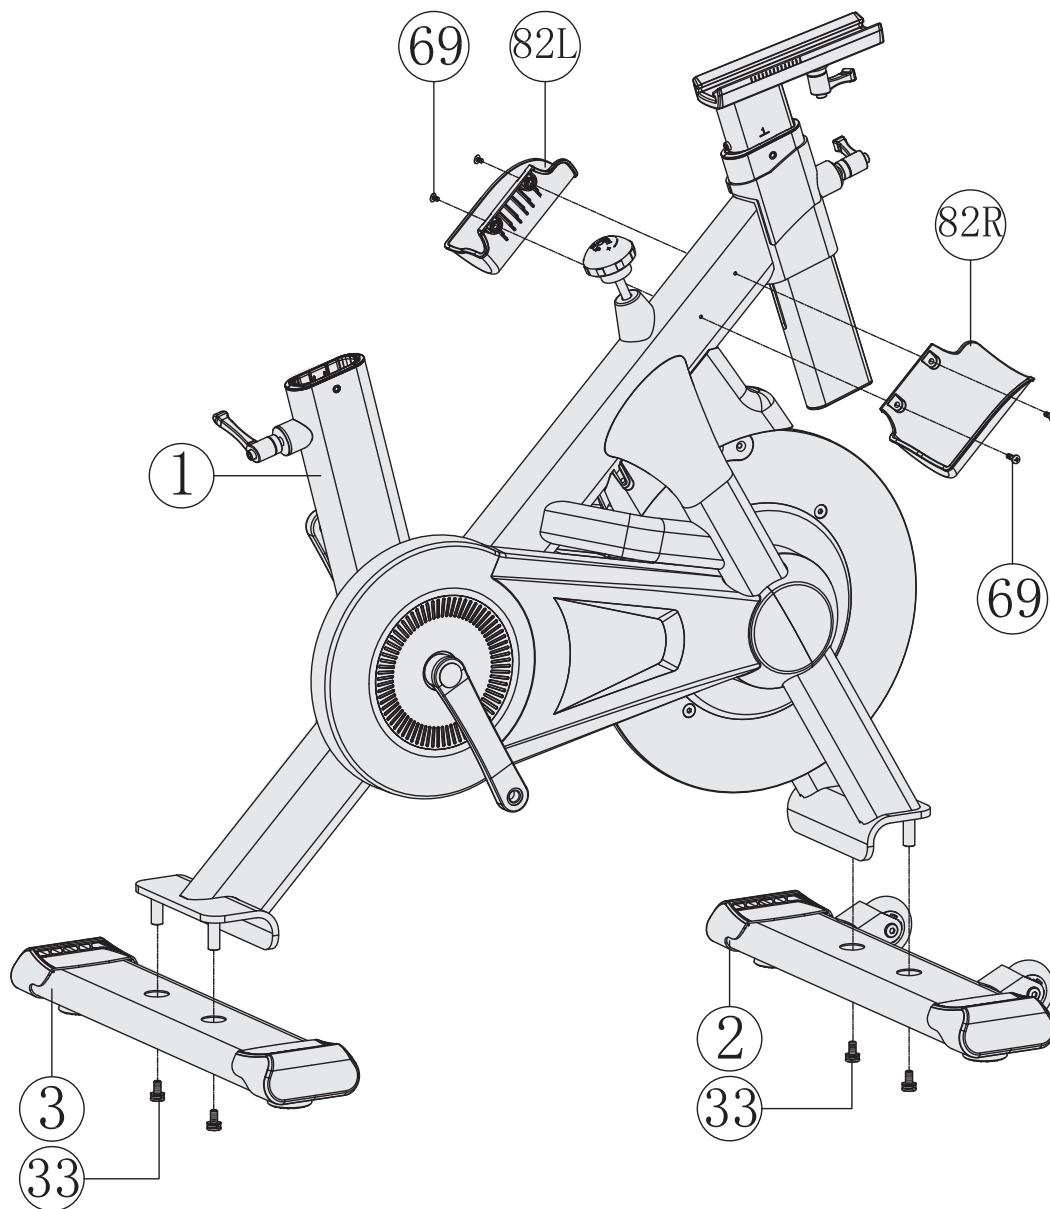

Step 2: Assembly of the Seat Post, Seat and Pedals

1. Unscrew and pull the round knob (50).
2. Insert the seat post (4) into the main frame (1)



CAUTION

Make sure the round knob (50) audibly engages in one of the adjustment holes of the seat post (4).


3. Slightly loosen the bolt connection underneath the seat (60).
4. Attach the seat (60) to the seat post (4) and retighten the bolt connection with the wrench.



CAUTION

Make sure to screw in the pedals completely.

5. Attach the right pedal (23R) to the right crank with the wrench by turning clockwise.
6. Attach the left pedal (23L) to the left crank with the wrench by turning counterclockwise.

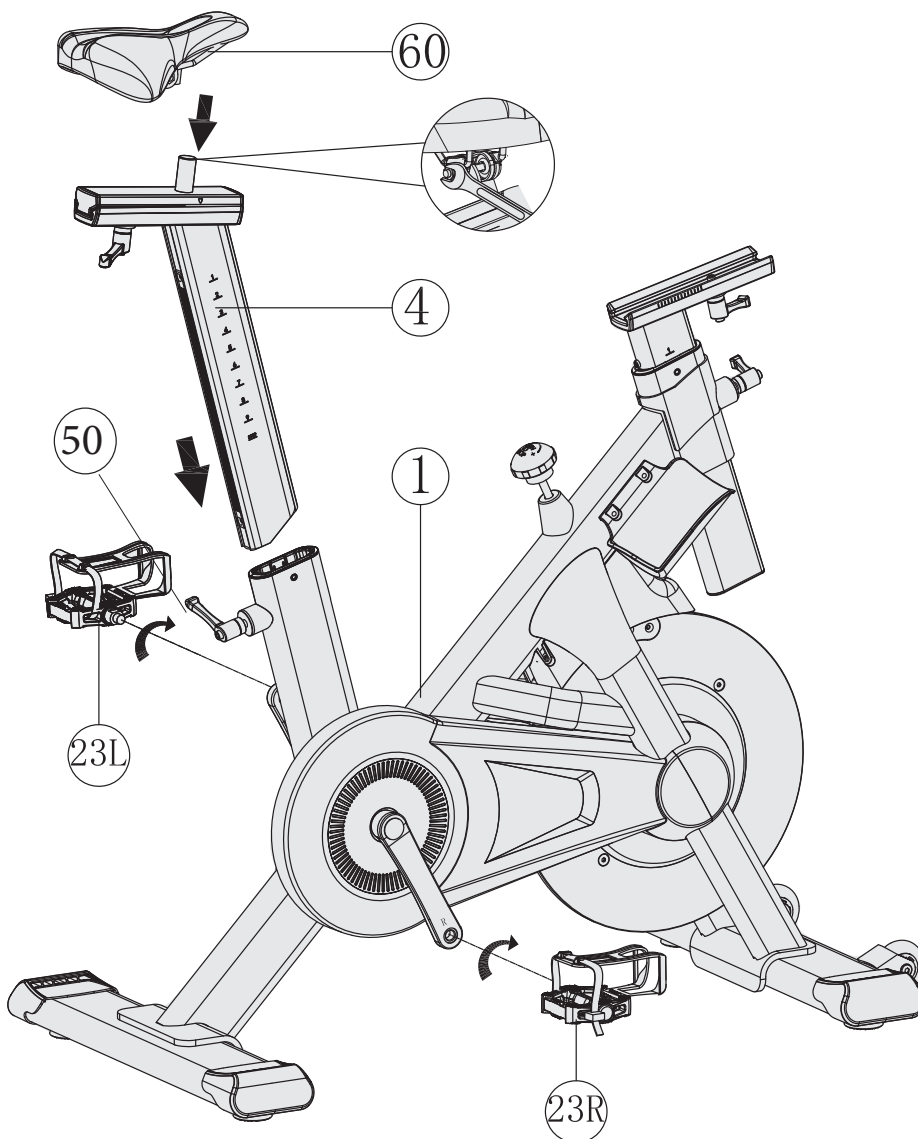

Step 3: Assembly of the Handlebar

1. Fix the handlebar (6) to the front post (5) with the L knob (90).

NOTICE


- + The L knob (90) is under the front post (5).
- + Should the handlebar (6) be loose after the assembly, push the L knob (90) slightly down:
Tighten the bolt under the L knob (90) with the Allen key.

2. Screw in the bolt (96).



3. Attach the plug (28) to the handlebar (6).

CAUTION

Make sure of the straight position of the L knob (90) (illustration e).

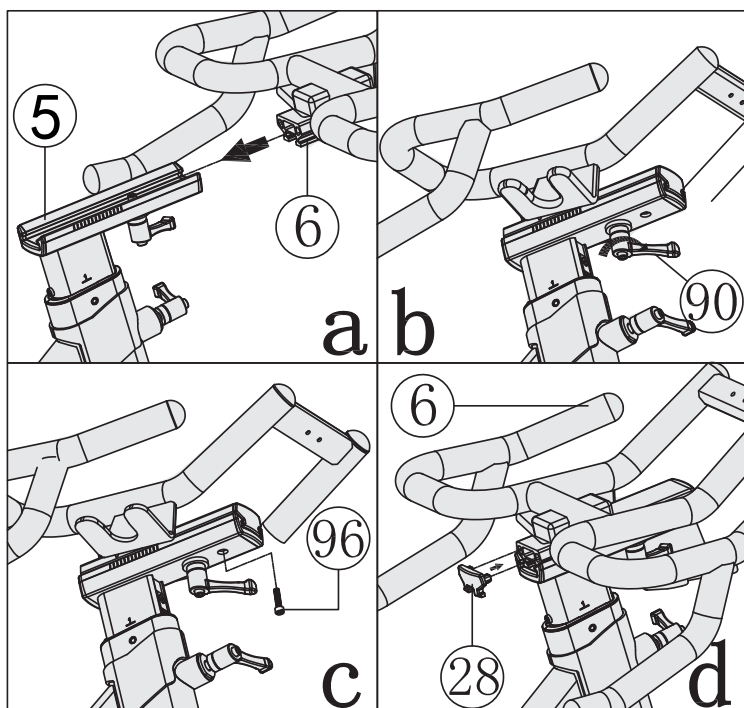

| | | | |
|----|--|------------|----|
| | | | |
| 96 | | M6*1.0*20L | x1 |
| 28 | | 55.7*29.4 | x1 |

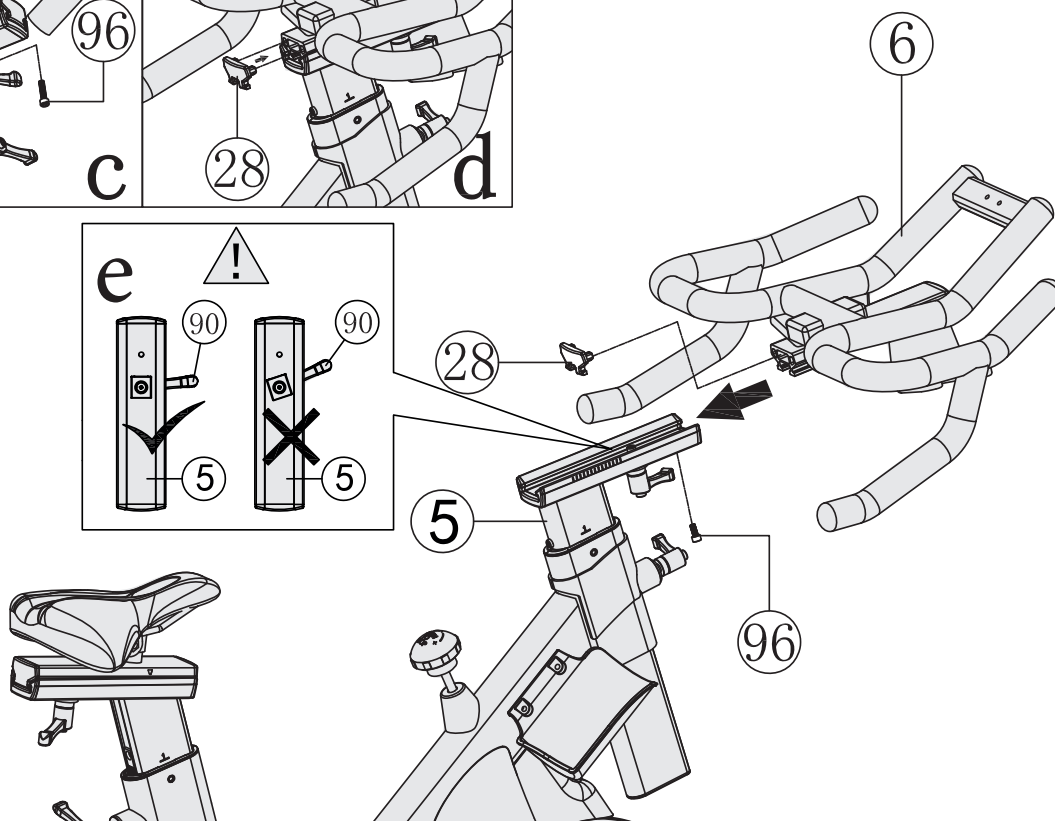



Step 4: Assembly of Computer Fixing Plate and the Computer

1. Disassemble the four screws (70) from the computer (10).
2. Assemble the computer fixing plate (9) to the handlebar (6) with two bolts (88) and two washers (89).

► **ATTENTION**


Be careful not to pinch the cables during the following steps.

3. Pass the upper computer cable (104) through the opening of the computer fixing plate (36).
4. Attach the wire plug (61) to the upper computer cable (104).
5. Connect the upper computer cable (104) with the cable of the computer (10).
6. Attach the computer (10) and the flat rack (12) to the computer fixing plate (9) with four screws (70).

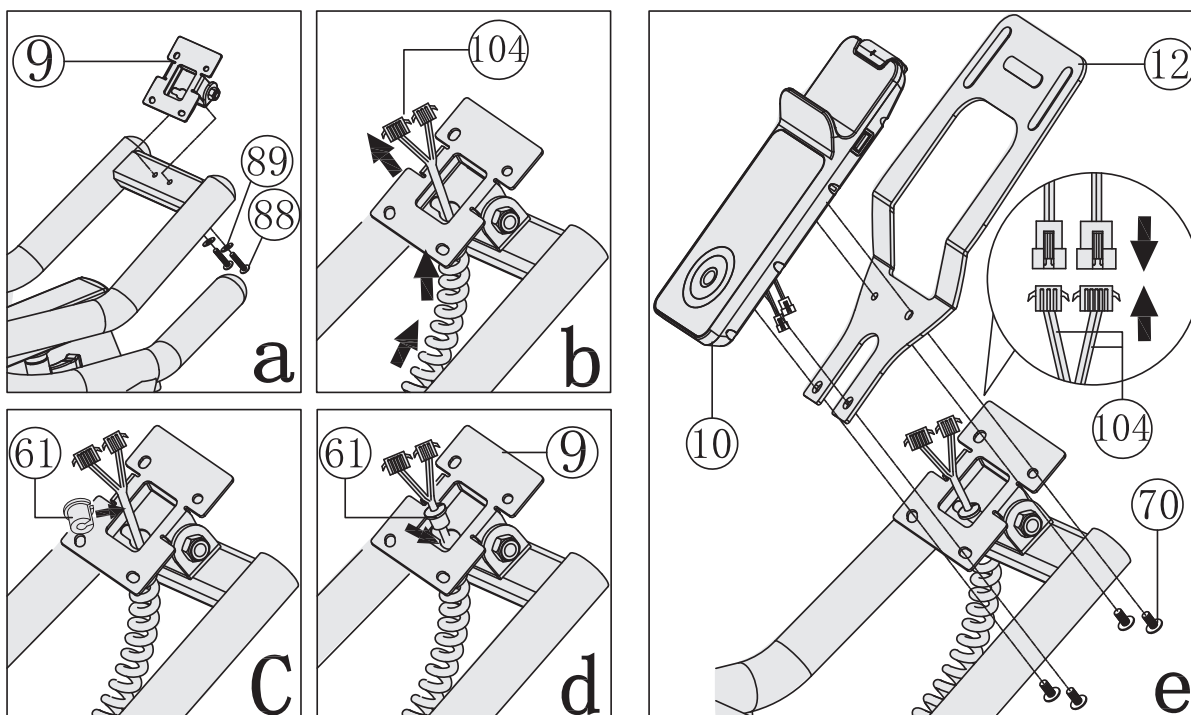

| | | | |
|----|--|-------------|----|
| 88 | | M5*0.8*30L | X2 |
| 89 | | D15*D5.2*3T | X2 |
| 61 | | D4*D12*13 | X1 |

| | | | |
|----|--|------------|----|
| 70 | | M5*0.8*15L | X4 |
|----|--|------------|----|

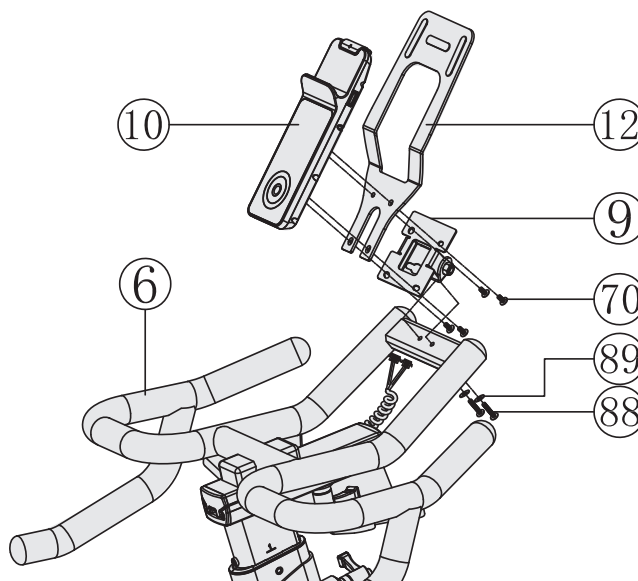

Step 5: Alignment of the Feet

If the floor is uneven, you can stabilize the equipment by turning the two setting screws under the main frame.

1. Lift the equipment on the desired side and rotate the setting screws under the main frame.
2. Rotate the screws clockwise in order to remove them and to raise the equipment.
3. Rotate them counterclockwise in order to lower the equipment.

Step 6: Adjusting the Seat Position

Height Adjustment



CAUTION

The seat post is marked with "STOP" for the minimum insertion depth. When adjusting, make sure not to exceed the minimum insertion depth.


1. Loosen and pull the round knob (50) to adjust the height of the seat post.



CAUTION

In the following step, make sure the round knob (50) audibly engages in one of the adjustment holes.

2. Retighten the round knob (50).

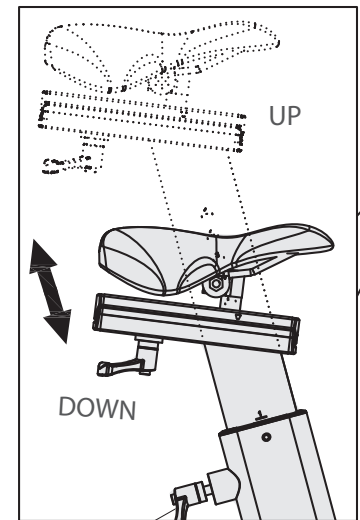

50

Horizontal Adjustment


1. Loosen and pull the L knob (90) underneath the seat until it can be moved forward and backward.
2. Move the seat into the desired position.



CAUTION

In the following step, make sure the L knob (90) audibly engages in one of the adjustment holes.

3. Retighten the L knob (90).

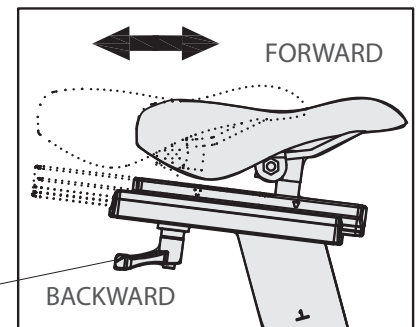

90

Step 7: Adjusting the Handlebar Position

Height Adjustment



CAUTION

The front post is marked with "STOP" for the minimum insertion depth. When adjusting, make sure not to exceed the minimum insertion depth.


1. Loosen and pull the round knob (50) to adjust the height of the front post.



CAUTION


In the following step, make sure the knob audibly engages in one of the adjustment holes.

2. Retighten the round knob (50).

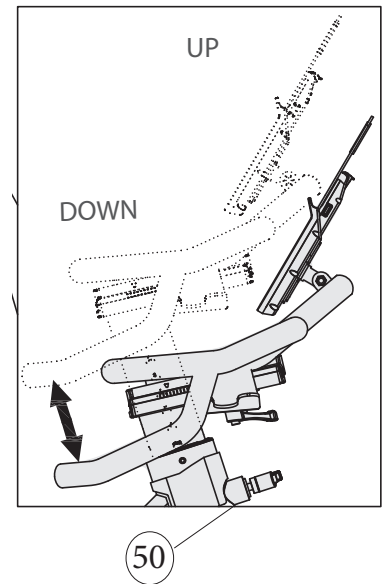

Horizontal Adjustment

1. Turn the L knob (90) to the left until the handlebar can be moved.
2. Adjust the handlebar to the desired position.
3. Retighten the L knob (90) by turning it to the right.

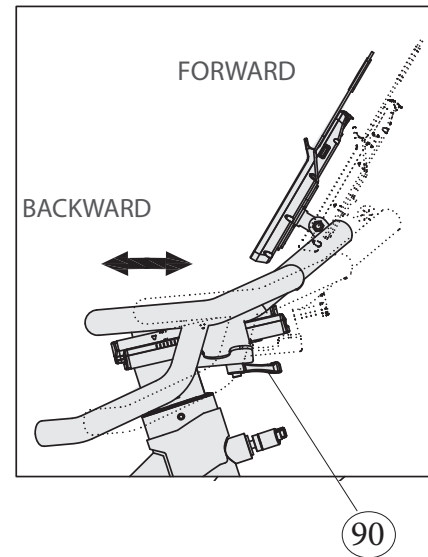

Correctly Getting On and Off


1. To get on, grip the handles with both hands and first step onto the left pedal with your left foot or onto the right pedal with your right foot and then place your foot onto the other pedal.
2. To get off, grip the handles with both hands and place one foot next to the equipment and then the other foot.

3 OPERATING INSTRUCTIONS


① NOTICE

- + Familiarise yourself with all the functions and setting options of the device before starting training. Have the proper use of this product explained to you by a specialist.
- + Always start your training with low intensity and increase evenly and gently. End your training with a cool-down phase. If you are unsure, please consult your physician.



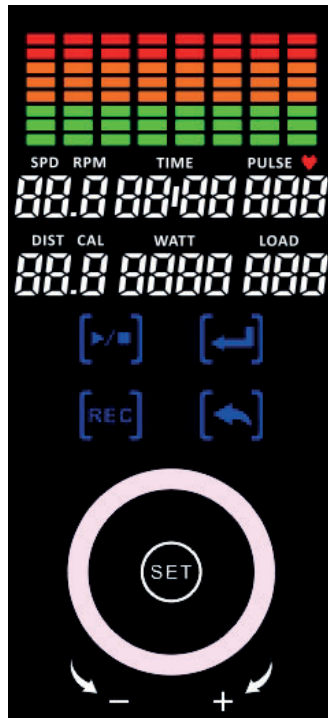



3.1 Console Display



| | |
|-----------------|---|
| TIME | <ul style="list-style-type: none"> + Display of the training time + Display range 0:00 - 99:59 + Setting range 0:00 - 99:00 (in 1:00 increments) |
| SPEED | <ul style="list-style-type: none"> + Display of the speed + Display range 0.0 - 99.9 km/h or ml/h |
| DISTANCE | <ul style="list-style-type: none"> + Display of the distance + Display range 0 - 99.9 km or ml + Setting range 0.0 - 99.0 km (in 1.0 increments) |
| CALORIES | <ul style="list-style-type: none"> + Display of the calories + Display range 0 - 999 kcal + Setting range 0.0 - 990 kcal (in 10 increments) |
| PULSE | <ul style="list-style-type: none"> + Display of the heart rate + Display range 0 - 230 + Setting range 0 - 230 (in 1 increments) |

| | |
|---|--|
| WATT | <ul style="list-style-type: none"> + Display of the wattage + Display range 0-999 |
| RPM | <ul style="list-style-type: none"> + Display of rotations per minute + Display range 0 - 999 |
| LOAD (Resistance level)  | <ul style="list-style-type: none"> + Display of the resistance level + The resistance level is displayed in colored segments (green, orange and red). + Green - low; Red - high + Display range 0 - 99 |

3.2 Button Functions

| | |
|--|---|
|  | START/PAUSE <ul style="list-style-type: none"> + With this button you start/pause the training. |
|  (+) | UP <ul style="list-style-type: none"> + With the jog dial you increase the values by turning it clockwise. |
|  (-) | DOWN <ul style="list-style-type: none"> + With the jog dial you decrease the values by turning it counterclockwise. |
|  | RECOVERY <ul style="list-style-type: none"> + With this button you start the recovery function. |
|  | RESET <ul style="list-style-type: none"> + To restart the console tap this button and hold it for about 2 seconds. + In pause mode, tap this button to end the workout and return to the main menu. |
|  | ENTER <ul style="list-style-type: none"> + Use this button to confirm value settings. |

3.3 Turning on the Console and Standby Mode

1. Turn on the console.

NOTICE

The console turns on once the pedals are set into motion.

After the console is turned on, the LED display lights up for 2 seconds.

After that, the preset value for the wheel diameter is displayed for 1 second and the time setting is shown.

NOTICE

If there is no signal input within 4 minutes, the console starts standby mode. To exit standby mode, tap any key or pedal.

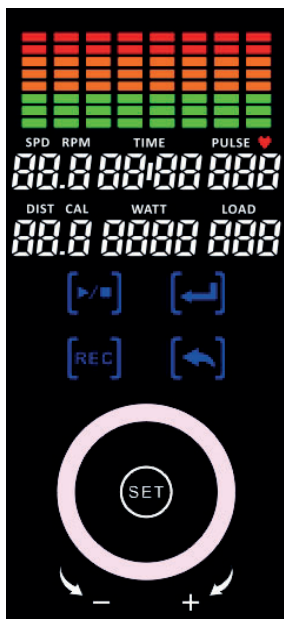


Fig. 1



Fig. 2

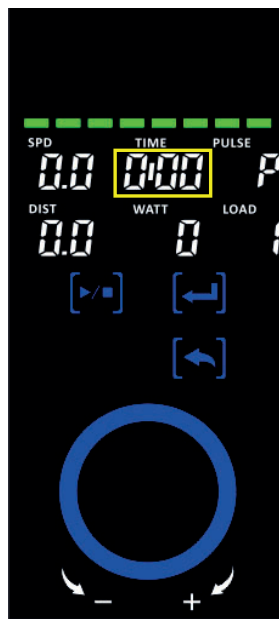


Fig. 3




Fig. 4

3.4 Manual Mode

Set your parameters.

1. The parameter flickers.

The following parameters can be adjusted:

- + TIME (Fig. 5)
- + DISTANCE (Fig. 6)
- + CALORIES (Fig. 7)
- + PULSE (Fig. 8)

2. Tap on UP/DOWN (+/-) to set the value.
3. Tap on ENTER to enter the next parameter.

4. Tap on START/STOP and start your workout.

The values appear on the display.

When adjusting the VR (variable resistor), the matrix and LOAD are synchronized.

5. Tap on START/STOP to pause your workout.
6. Tap on RESET to get back to the time settings (TIME).

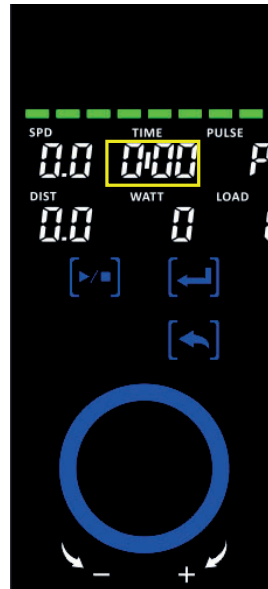


Fig. 5

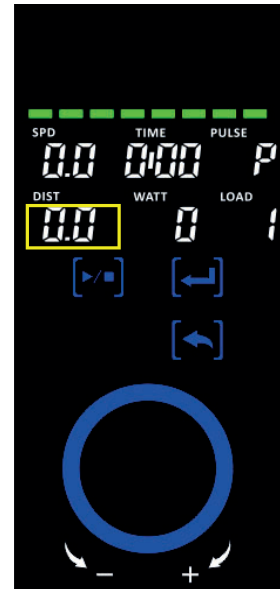


Fig. 6

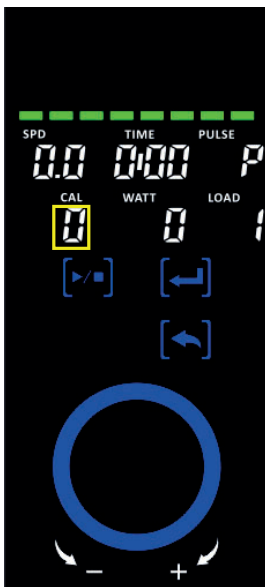


Fig. 7

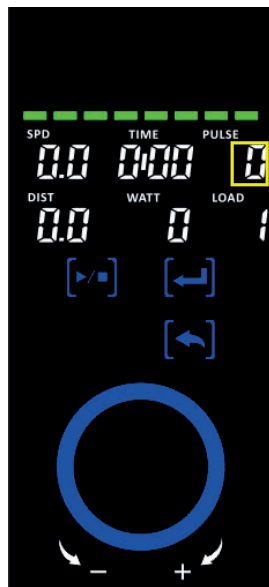


Fig. 8

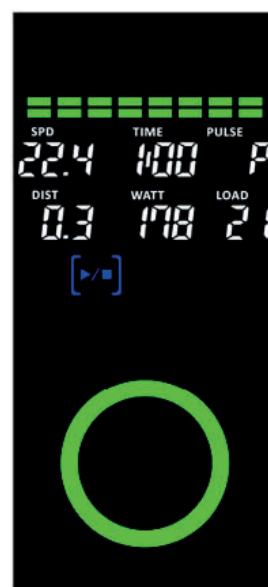


Fig. 9

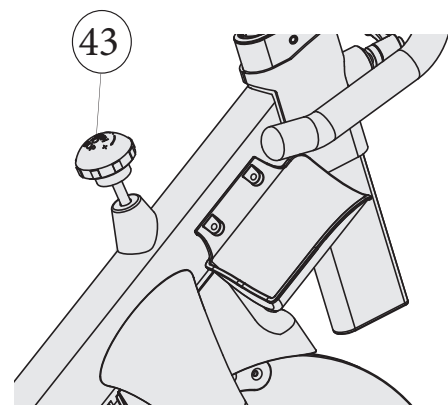


Fig. 10

LOAD (Resistance Level)

Adjust the resistance with the ball knob (43).

1. Increase the resistance by turning the ball knob clockwise (+).
2. Decrease the resistance by turning the ball knob counterclockwise(-).



3.5 Recovery Function

The recovery function calculates your resting heart rate after your workout.

NOTICE

For this function you must wear a compatible chest strap.

WARNING

Your training equipment is not a medical device. The heart rate measurement of this equipment may be inaccurate. Various factors can affect the accuracy of the heart rate measurement. The heart rate measurement serves only as a training aid.

1. After the workout, tap recovery (REC).

A countdown of 60 seconds is started

After the countdown has ended, your recovery heart frequency is displayed (F1 - F6).

F1 is the best possible result, F6 is the worst possible result.

2. To return to the main menu, tap REC again.



Fig. 11



Fig.12

3.6 Resistance Calibration

1. Long tap ENTER+START+RESET to enter the factory mode (model/version/date).
2. Long tap START+RESET to enter the calibration settings.
3. Set the value to the lowest level and tap ENTER.

The next parameter blinks.

4. Set the next value to the highest level and tap ENTER.

The console initiates a restart.

3.7 Wireless Connection and Fitness Apps

This console is equipped with a wireless interface. Please take note that your mobile device needs to be compatible with the wireless interface of the treadmill.





To use training apps you will have to activate the wireless connection function on your mobile device (tablet or smart phone) and start the fitness app. Select your fitness equipment. Please follow the instructions given in the app. You will find the name of your fitness equipment on a small sticker on the back of the console.

You will find the fitness apps in the app stores of Google or Apple. There you will find the apps "Kinomap" or "Zwift". Please note that these apps are produced by an external manufacturer. Fitshop does not take any responsibility regarding the availability, functionality or contents of these programmes.

IMPORTANT NOTE

The pre-installed apps are produced and provided by external manufacturers. Changes and availability within these apps might occur. Fitshop does not take any responsibility and can not be held liable for the availability, functionality or contents of these apps. To make sure the pre-installed apps are working correctly, they must be updated regularly. If needed, the respective app will notify you to do so. To update the app, you need a google account. A google email is sufficient. Just follow the instructions on the screen to perform the update.

Please note: The system is set up only for the pre-installed apps. Do not install any additional apps as their proper functionality can not be guaranteed. The installation of other apps might cause technical issues.

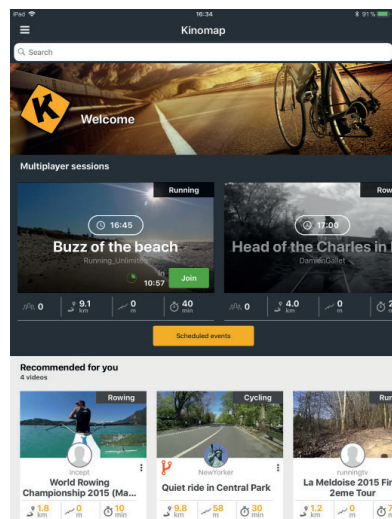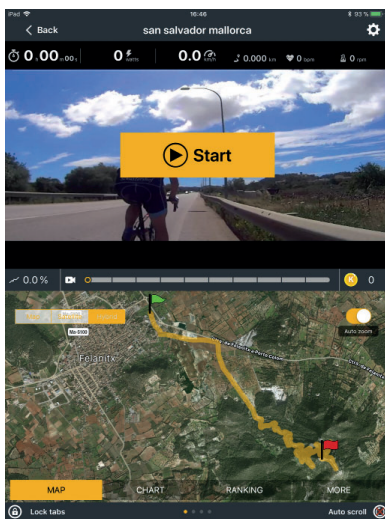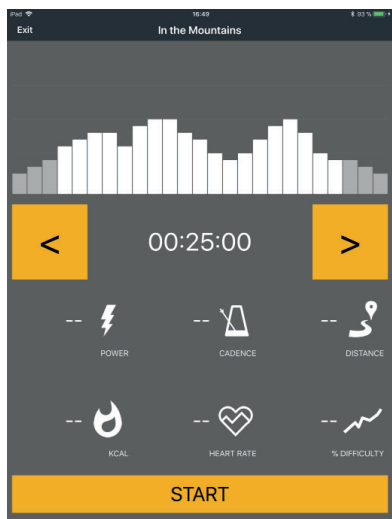

Example: Kinomap

4.1 General Instructions

WARNING

- + The storage location should be chosen so that improper use by third parties or children can be prevented.
- + If your equipment does not have transportation wheels, the equipment must be disassembled before transportation.

▶ ATTENTION


- + Make sure that the equipment is protected from moisture, dust and dirt in the selected storage location. The storage location should be dry and well ventilated and have a constant ambient temperature between 10°C and 35°C.

4.2 Transportation Wheels

▶ ATTENTION

If you want to transport your equipment over particularly sensitive and soft floor coverings, such as parquet, planks or laminate, lay out the transport route with cardboard or similar to avoid possible floor damage.

1. Stand behind the equipment and lift it until the weight is transferred to the transportation wheels. After that, you easily can move the equipment to a new position. For long transport distances the equipment should be disassembled and safely packed.
2. Select the new location by following the instructions in the section 1.4 of this manual.

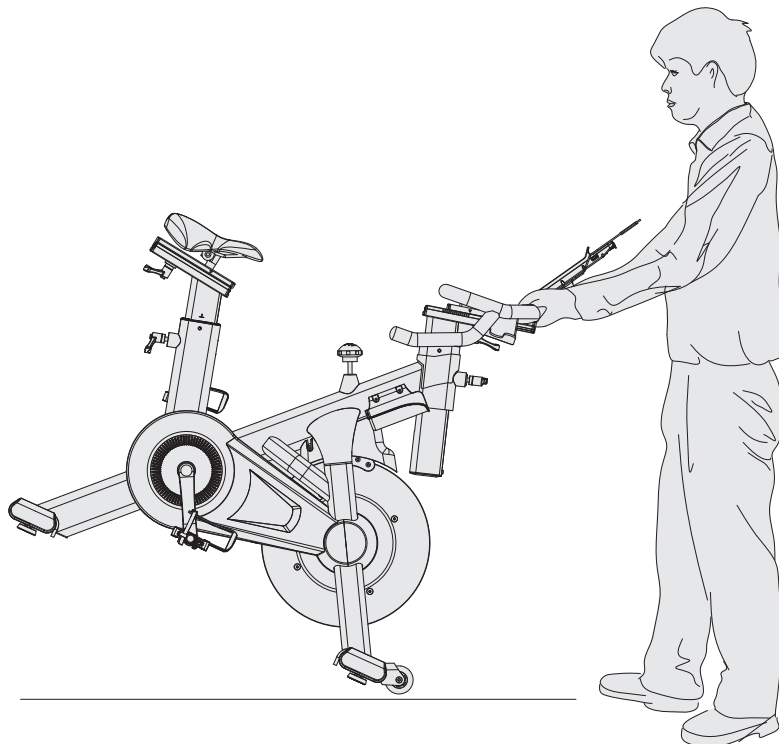

5.1 General Instructions



WARNING

- + Do not make any improper changes to the equipment.



CAUTION

- + Damaged or worn components may affect your safety and the life of the equipment. Therefore, immediately replace damaged or worn components. In such a case, contact the contract partner. The equipment must not be used until it has been repaired. If necessary, use only original spare parts.

► ATTENTION

- + In addition to the instructions and recommendations for maintenance and care given here, additional service and/or repair work may be necessary; this must only be carried out by authorised service technicians.

5.2 Faults and Fault Diagnosis

The equipment undergoes regular quality controls during production. Nevertheless, faults or malfunctions may occur. Frequently, individual parts are responsible for these disturbances, an exchange is usually sufficient. Please refer to the following overview for the most common errors and how to correct them. If the equipment still does not function properly, contact your contract partner.

| Fault | Cause | Solution |
|---------------------------------|---|--|
| Cracking in the pedal area | Pedals loose | Tighten the pedals |
| Equipment wobbles | Equipment is not level | Align the feet |
| Handlebar/saddle wobbles | Loose screws | Tighten screws firmly |
| Display is blank/is not working | Batteries empty or loose cable connection | Replace batteries or check cable connections |
| No pulse display | <ul style="list-style-type: none"> + Sources of interference in the room + unsuitable chest strap + Wrong position of chest strap + Chest strap defective or battery empty + Pulse display defective | <ul style="list-style-type: none"> + Eliminate sources of interference (e.g. mobile phone, WLAN, lawn mower and vacuum cleaner robot, etc. ...) + Use a suitable chest strap (see RECOMMENDED ACCESSORIES). + Reposition chest strap and/or moisten electrodes + Changing batteries + Check if pulse display by hand pulse possible |

5.3 Error Codes and Troubleshooting

The electronics of the equipment continuously carries out tests. In case of deviations, an error code appears on the display and normal operation is stopped for your safety.

Please contact the contract partner for technical support.

5.4 Maintenance and Inspection Calendar

To avoid damage from body sweat, the equipment must be cleaned with a damp towel (no solvents!) after each training session.

The following routine tasks must be performed at the specified intervals:

| Part | Weekly | Monthly |
|--------------------------------|--------|---------|
| Display console | C | I |
| Plastic covers | C | I |
| Screws and cable connections | | I |
| Check pedals for tightness | | I |
| Legend: C = clean; I = inspect | | |

6 DISPOSAL

At the end of its operational life, this equipment cannot be disposed of in normal household waste. Instead, it must be disposed of via an electricals recycling centre. Further information can be obtained from your local authority's recycling service.



The materials can be recycled as per their symbols. Through the reuse, recycling of materials or other forms of recovery of old equipment, you make an important contribution to the protection of the environment.

7 RECOMMENDED ACCESSORIES

To make your training experience even more efficient and pleasant, we recommend that you add suiting accessories to your fitness equipment. For indoor cycles this could for example be a **floor mat**, which makes your fitness equipment stand more securely and also protects the floor from sweat or **silicone spray** to keep moving parts in good shape. For many indoor bikes it is possible to replace the **saddle** or **pedals**, as these are usually the same mounts used on bicycles.

If you have purchased a fitness machine with pulse training and want to train your heart rate, we strongly recommend that you use a compatible **chest strap**, as this ensures optimum transmission of the heart rate.

Our range of accessories offers the highest quality and makes training even better. If you would like to find out more about compatible accessories, please go to the detail page of the product in our webshop (the easiest way is to enter the article number in the search field above) and go to the recommended accessories on this page. Of course, you can also contact our customer service: by telephone, e-mail, in one of our branches or via our social media channels. We will be happy to advise you!



floor mat



chest strap



chest strap contact gel



pedals



saddle cover



silicone spray

8.1 Serial Number and Model Name

In order to provide you with the best possible service, please have the model name, article number, serial number, exploded drawing and parts list ready. The corresponding contact options can be found in chapter 10 of this operating manual.

NOTICE

The serial number of your equipment is unique. It's located on a white sticker.

Enter the serial number in the appropriate field.

Serial number:

Brand / Category:

Model Name:

Article Number:

8.2 Parts List


| No. | Name | Supplier Parts No. | Specification | Qty. |
|-------------|------------------------------|--------------------|--|------|
| 1 | Main frame | 850G1-3-1000-BA2 | 2 spray 2 bake | 1 |
| 2 | Front stabilizer | 850G1-3-2100-BA0 | 2 spray 2 bake | 1 |
| 3 | Rear stabilizer | 850G1-3-2112-BA0 | 2 spray 2 bake | 1 |
| 4 | Seat post | 850G1-3-2200-AF1 | Laser marking | 1 |
| 5 | Front post | 850G1-3-2000-AF0 | | 1 |
| 6 | Handlebar | 850G1-3-2400-B0 | | 1 |
| 7 | Motorized generator | 850G1-3-3102-00 | D290*47L \times 11KG | 1 |
| 8 | Seat adjustable tube | 849S0-3-4000-A40 | | 1 |
| 9 | Computer fixing plate | 850G1-6-2402-BA0 | 2 spray 2 bake | 1 |
| 10 | Computer | 850G1-6-2501-B0 | SI8612-84 | 1 |
| 11 | Oval pipe plug | 849S0-6-2190-B0 | 125.5*54.6*88.6L | 4 |
| 12 | Flat rack | 849S1-6-2466-BA0 | 2 spray 2 bake | 1 |
| 13 | Belt | 58004-6-1115-00 | 540 PJ8 | 1 |
| 14 | Pulley | 58008-6-1043-D0 | D260*22.5*2T | 1 |
| 15 | Crank axle | 850A1-3-2903-00 | | 1 |
| 16 | Bearing#6004,2RS,SKF | 58006-6-1042-00 | #6004-2RS(CO)(SKF) | 2 |
| 17L | Left crank | 58007-6-1097-D0 | 170Lx9/16"-20BC | 1 |
| 17R | Right crank | 58007-6-1098-D0 | 170Lx9/16"-20BC | 1 |
| 18 | Bolt cover | 81502-6-2779-B0 | D26*11L | 2 |
| 19 | Anti-loosen nut M10*1.25*10T | 70501-6-2775-N0 | M10*1.25*10T | 2 |
| 20 | C-clip(D22.5*D18.5*1.2T) | 55519-1-2312-DA | D22.5*D18.5*1.2T | 2 |
| 21 | Waved washer(D27*D20.3*0.5T) | 55120-5-2705-DA | D27*D20.3*0.5T | 1 |
| 22 | Flat washer(D26*D21*1.5T) | 55120-1-2615-NA | D26*D21*1.5T | 1 |
| 23L /23R | Pedal set(L&R) | 58029-6-1161-B4 | "JD-004V,9/16+black SPD, With muzzle and foot straps" | 1 |
| 24 | Allen bolt (M6x1.0x12L) | 50106-5-0012-C0 | M6x1.0x12L | 4 |
| 25 | Nylon nut (M6x1.0x6T) | 55206-1-2006-CA | M6x1.0x6T | 5 |
| 26 | Handlebar adjustment tube | 850G1-6-2018-AF0 | 56.3*30*210L | 1 |
| 27 | Bolt (M8*1.25*20L) | 58008-7-0020-F0 | M8*1.25*20L, | 4 |
| 28 | Plug(1) | 849S0-6-2286-B0 | 55.7*29.4*18 | 4 |
| 29 | Screw(M6*1.0*10L) | 54006-5-0010-F0 | M6*1.0*10L | 2 |

| | | | | |
|----|--|------------------|------------------------|---|
| 30 | Hex nut D9.5x8T(3/8"-26UN-Fx8T) | 55295-2-3008-NA | D9.5x8T(3/8"-26UNFx8T) | 1 |
| 31 | Anti-loosen nut 3/8"-26UNFx6.5T | 18600-6-3175-N1 | 3/8"-26UNFx6.5T | 2 |
| 32 | Bolt(M8x1.25x60L) | 50308-5-0060-F3 | M8x1.25x60L | 1 |
| 33 | Allen bolt M8x1.25x20L | 25600-6-3191-F0 | M8x1.25x20L | 4 |
| 34 | "Countersunk head tapered screw M5*0.8*10L" | 51405-2-0010-F0 | M5*0.8*10L | 3 |
| 35 | Adjustable wheel | 76100-6-2174-B0 | D50*M10*1.5 | 4 |
| 36 | Seat tube limiter | 850G1-6-2273-F0 | 363*19*3T | 2 |
| 37 | Round wheel | 84302-6-2175-00 | D70.5*23 | 2 |
| 38 | Allen boltM8*1.25*40L | 50308-5-0040-F3 | M8*1.25*40L | 2 |
| 39 | Nylon nut M8*1.25*8T | 55208-1-2008-FA | M8*1.25*8T | 3 |
| 40 | Inner tube | 850G1-6-1071-B0 | 99.8*19.8*157 | 2 |
| 41 | Inner tube | 850G1-6-1093-B0 | 99.8*19.8*157 | 2 |
| 42 | Cover of brake | 850A1-6-1031-00 | 48.8*41.8*2.3T | 1 |
| 43 | Ball knob | 52908-2-0045-R1 | D59*45*M8 | 1 |
| 44 | Screw stem | 850A1-6-1084-N0 | D10*235L | 1 |
| 45 | Fixed tube | 850A1-6-2113-B1 | D16*D10.5*69L | 1 |
| 46 | Bushing tube | 850A1-6-2118-B2 | D16*D10.5*43L | 1 |
| 47 | Sop plate | 850A1-6-4073-00 | 20*20*15L | 1 |
| 48 | Positioning block | 850A1-6-2082-00 | 16.5*16.5*15L | 1 |
| 49 | Allen nut M8*1.25*6T | 55208-2-2006-NA | M8*1.25*6T | 1 |
| 50 | Round knob | 849S0-6-1072-RA0 | M12*25L | 2 |
| 51 | Cup nutM10*1.5*14L | 55210-A-2014-FA | M10*1.5*14L | 1 |
| 52 | Allen nutM10*1.5*5T | 55210-2-2005-FA | M10*1.5*5T | 1 |
| 53 | Bearing#6203-2RS | 58006-6-1044-00 | 6203-2RS,SKF | 2 |
| 54 | C-clipS-16(1T) | 55516-1-0010-00 | S-16(1T) | 1 |
| 55 | Waved washer D21*D16*0.3T | 55116-5-2103-DA | D21*D16*0.3T | 1 |
| 56 | Idle wheel shaft | 850G1-6-1602-00 | D22*33.5L | 1 |
| 57 | Flat washerD20*D11*3T | 55110-1-2430-NA | D20*D11*3T | 1 |
| 58 | Bolt M10*1.5*20L | 50110-2-0020-UN0 | M10*1.5*20L | 1 |
| 59 | Adjustable screw stem | 850A1-6-3302-F0 | 1/4"-20UNC*59L | 1 |
| 60 | Seat | 58001-6-1429-B0 | VL-3542-1A | 1 |
| 61 | Wire plug | 55312-1-0015-BA | D4*D12*13 | 2 |
| 62 | Upper trim cover | 850G1-6-4520-B0 | 1252*99*46 | 1 |

| | | | | |
|-----|----------------------------------|------------------|-------------------|----|
| 63 | Left chaincover | 850A1-6-4501-B0 | 378.6*196.6*62.5 | 1 |
| 64 | Right chaincover | 850G1-6-4502-B0 | 625.5*299*75.3 | 1 |
| 65 | Hole cover of chain cover | 850A1-6-4505-B0 | 312.9*145.7*7.9 | 1 |
| 66 | Front left decorative cover | 850G1-6-4523-B0 | 159.2*94.6*75.3 | 1 |
| 67 | Front right decorative cover | 850G1-6-4546-B0 | 159.2*79.5*75.3 | 2 |
| 68 | Flywheel cover | 850A1-6-4528-B0 | 234.8*148.2*73.8 | 1 |
| 69 | ScrewST4.2*15L | 52842-2-0015-F0 | ST4.2*15L | 11 |
| 70 | ScrewM5x0.8x15L | 52605-5-0015-F0 | M5x0.8x15L | 6 |
| 71 | Round cross bolt(ST3.5*1.41*12L) | 50935-2-0012-F0 | ST3.5*1.41*12L | 7 |
| 72 | ScrewM4*0.7*8L | 54804-2-0008-N0 | M4*0.7*8L | 1 |
| 73 | Bolt M6*1*45L | 54006-5-0045-F3 | M6*1.0*45L | 1 |
| 74 | Flywheel(2) | 850A1-6-3103-02 | D420*9T | 1 |
| 75 | Magnet fixing bracket | 850G1-6-3231-B90 | 140.3*45.9*4T | 1 |
| 76 | Brake pad | 850A1-6-2678-B2 | 38*22*8 | 1 |
| 77 | Cow leather | 850A1-6-1088-01 | 31*22*3T | 1 |
| 78 | ScrewM5*0.8*8L | 81605-5-0008-F0 | M5*0.8*8L | 7 |
| 79 | Magnet | 58009-6-1016-00 | D25*10T | 6 |
| 80 | Magnet cover | 850G1-6-3272-B0 | 89.9*37.8*12 | 2 |
| 81 | Spring | 58003-6-1079-N3 | D1.2*D9.6*35L | 1 |
| 82L | Bottle holder(left) | 850A1-6-2091-B1 | 148*119.8*83.5*5T | 1 |
| 82R | Bottle holder(right) | 850A1-6-2092-B1 | 148*119.8*83.5*5T | 1 |
| 83 | Bushing | 58002-6-1099-00 | D22.2*D8.2*7T | 4 |
| 84 | ScrewM6*1*12L | 54806-2-0012-F0 | M6*1*12L | 1 |
| 85 | BoltM5*0.8*10L | 54005-5-0010-F0 | M5*0.8*10L | 1 |
| 86 | Pipe plug (D type) | 850G1-6-1087-B0 | 79.3*29.8*19.5 | 1 |
| 87 | Computer fixing plate | 850A1-6-2726-BA0 | 2 spray 2 bake | 1 |
| 88 | BoltM5x0.8x30L | 52605-2-0030-F0 | M5x0.8x30L | 2 |
| 89 | Flat washerD15*D5.2*3T | 55105-1-1530-FA | D15*D5.2*3T | 2 |
| 90 | L knob | 52710-2-0020-RAA | M10*20L | 2 |
| 91 | Flat washerD25*D10*2.0T | 55110-1-2520-FA | D25*D10*2.0T | 2 |
| 92 | Protection Strip | 81555-6-2278-B2 | 50*10*2.5T | 3 |
| 93 | Sop plate | 849S0-6-4073-00 | 23.5*10.6*25L | 2 |
| 94 | BoltM5*0.8*12L | 52605-2-0012-F0 | M5*0.8*12L | 2 |
| 95 | End plug | 849S0-6-2287-B0 | 56.6*26.4*18 | 4 |

| | | | | |
|-----|--------------------------|-----------------|------------------|---|
| 96 | BoltM6*1.0*20L | 54006-5-0020-F0 | M6*1.0*20L | 1 |
| 97 | Flat washerD18*D8.5*1.0T | 55108-1-1810-W8 | D18*D8.5*1.0T | 2 |
| 98 | Bushing | 24500-6-2704-F0 | D13*D8.5*40L | 1 |
| 99 | VR regulator | 850A1-6-2583-00 | 65*15 | 1 |
| 100 | Sensor bracket | 71900-6-2565-B0 | 24*22*2.5T | 1 |
| 101 | Adjustable rod | 850A1-6-2228-N2 | 52*9*0.5T | 1 |
| 102 | Round cross bolt | 50805-2-0012-F0 | M5*0.8*12L | 1 |
| 103 | Nylon nut M5*0.8*5T | 55205-1-2005-FA | M5*0.8*5T | 1 |
| 104 | Upper computer cable | 850G1-6-2572-00 | 500L+200 | 1 |
| 105 | Round magnet | 174R4-6-2574-00 | M02 | 1 |
| 106 | Screw M8*1.25*12L | 51608-5-0012-F0 | M8*1.25*12L | 4 |
| 107 | Sensor cable | 850A1-6-2576-01 | 600L | 1 |
| 108 | Cross screw ST3*6L | 55629-2-0006-N0 | ST3*6L | 1 |
| 109 | Lower computer cable | 850G1-6-2573-00 | 200L | 1 |
| 110 | VR control line | 850G1-6-3475-00 | 200L | 1 |
| 111 | Control board | 821G5-6-2597-00 | | 1 |
| 112 | Battery cable | 850G1-6-2553-01 | 50L+500L | 1 |
| 113 | Power supply cover | 841G0-6-4527-00 | 70*46 | 1 |
| 114 | Battery | 841G0-6-2554-00 | 6.0V,1300mHA | 1 |
| 115 | Screw ST4.2*10L | 55642-2-0010-N0 | ST4.2*10L | 4 |
| 116 | Nut cap | 849S0-1171-F0 | D30*12L*M24*2.0p | 2 |
| 117 | Tightening column | 850G1-6-1172-F0 | 19.7*19.7*20L | 2 |
| 118 | Spring | 58003-6-1081-N0 | D1.2*D19.6*15.3L | 2 |
| 119 | ScrewM6*1*10L | 54006-5-0010-F0 | M6*1*10L | 2 |
| 120 | Flat washerD13*D6.5*1.0T | 55106-1-1310-NA | D13*D6.5*1.0T | 2 |
| 121 | Magnet | 58009-6-1015-00 | D25*7T | 4 |
| 122 | Crank cover | 850G1-6-4524-B0 | D54*10 | 1 |
| 123 | Buffer stip(1) | 850G1-6-2088-B0 | 55*10*2T | 2 |
| 124 | Cross bolt ST2.9*9.5L | 53329-2-0009-D0 | ST2.9*9.5L | 2 |
| / | Allen cross wrentch | 58030-6-1038-N1 | M6 *150L | 1 |
| / | Open-end wrentch | 58030-6-1050-C0 | 153*6.5T | 1 |
| / | Cross screwdriver | 58030-6-1058-B0 | PH2*100 | 1 |
| / | Allen cross wrentch | 58030-6-1001-N1 | M5 | 1 |

8.3 Exploded Drawing

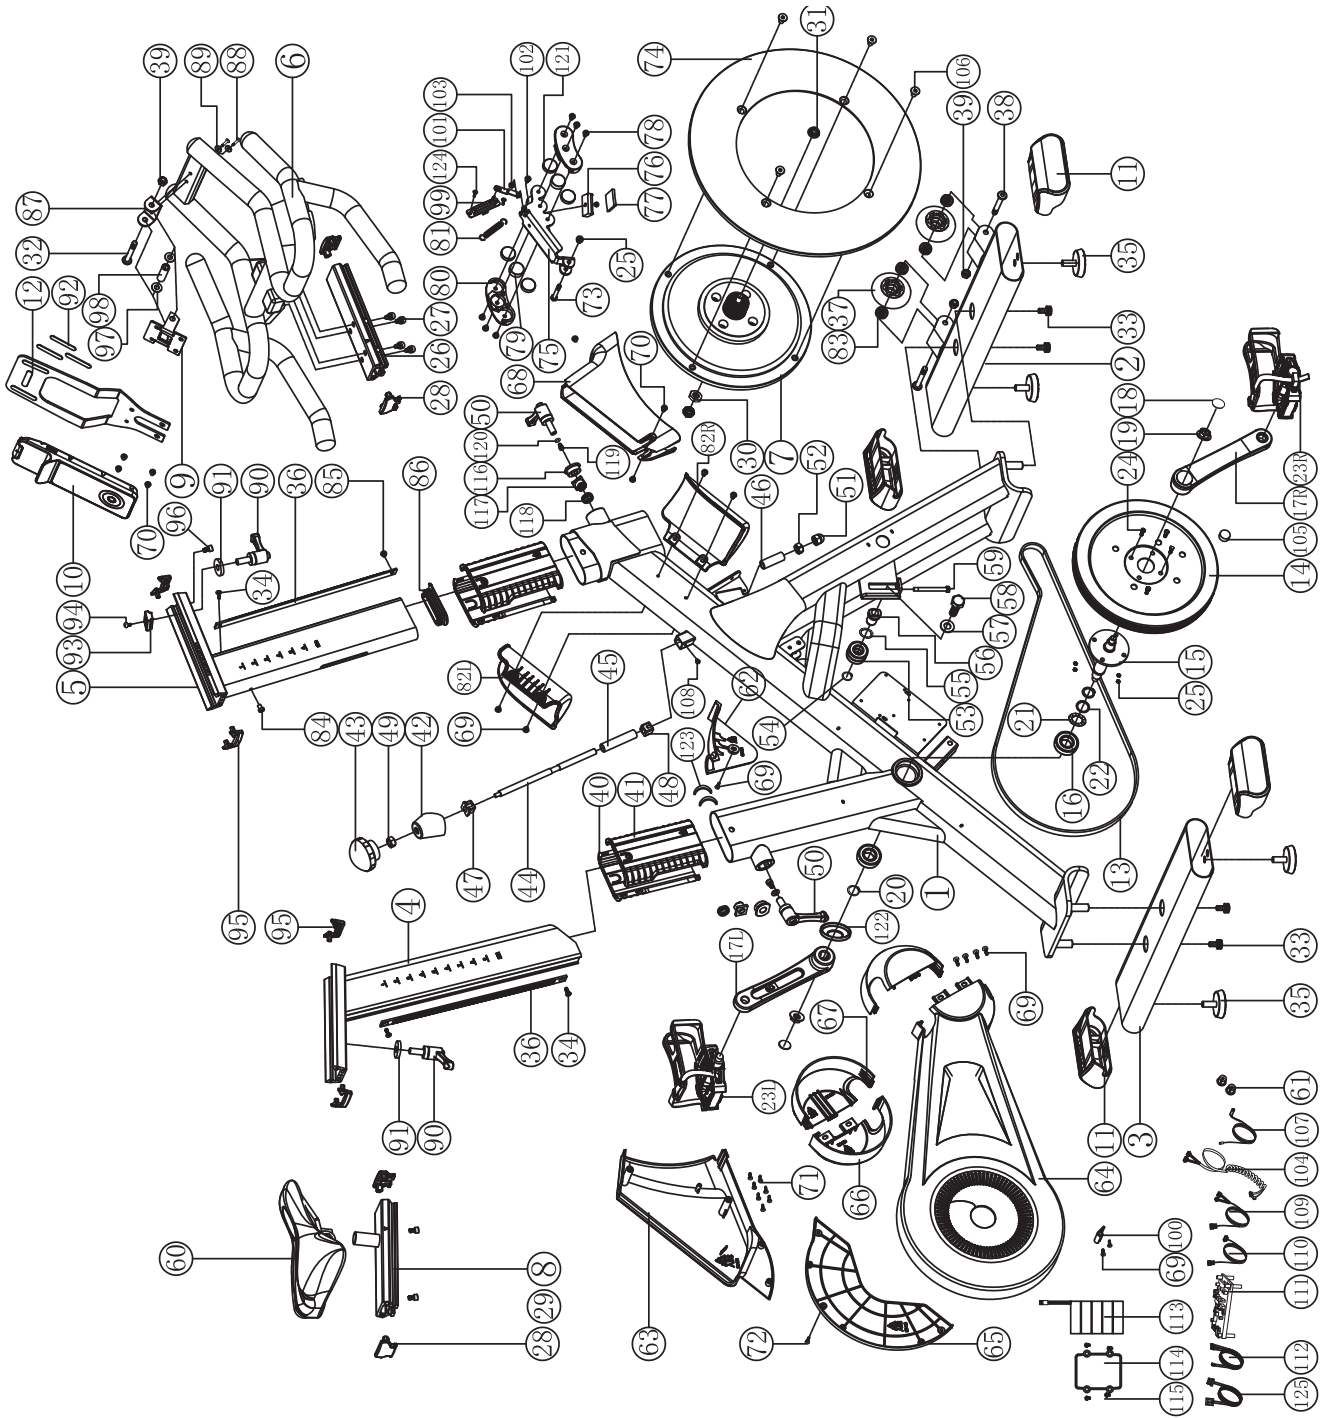

Products from TAURUS® are subject to strict quality control. However, if a fitness equipment purchased from us does not work perfectly, we take it very seriously and ask you to contact our customer service as indicated. We are happy to help you by phone via our service hotline.

Error Descriptions

Your fitness equipment is developed for long-term, high-quality training. However, should a problem arise, please first read the operating instructions. For further assistance, please contact your contract partner or call our service hotline. To ensure your problem is solved as quickly as possible, please describe the defect as exactly as possible.

In addition to the statutory warranty, we provide a warranty for every fitness equipment purchased from us according to the following provisions.

Your statutory rights are not affected.

Warrantee

The warrantee is the first/original buyer and/or any person who received a newly purchased product as a gift from the original buyer.

Warranty period

The warranty periods, shown on our web shop, begin on delivery of the fitness equipment. The respective warranty periods for your equipment can be found on its product website.

Repair Costs

According to our choice, there will either be a repair, a replacement of individual damaged parts or a complete replacement. Spare parts, that have to be mounted while assembling the equipment, have to be replaced by the warrantee personally and are not a part of repair. After the expiration of the warranty period, the responsibility for parts costs, repair costs, installation costs and delivery costs lies with the warranty holder.

The terms of use are defined as follows:

- + Home use: solely for private use in private households up to 3 hours per day
- + Semi-professional use: up to 6 hours per day (e. g. rehabilitation centres, hotels, clubs, company gyms)
- + Professional use: more than 6 hours per day (e. g. commercial gyms)

Warranty Service

Within the warranty period, equipment which develops faults as a result of material or manufacturing defects, will be repaired or replaced at our discretion. Ownership of equipment or parts of equipment which have been replaced is transferred to us. The warranty period is not extended nor does a new warranty period begin following repair or replacement under the warranty.

Warranty Conditions

For the warranty to be valid, the following steps must be taken:

Please contact our customer service by email or phone. If the product under warranty has to be sent in for repair, the seller bears costs. After expiry of the warranty, the buyer bears the costs of transport and insurance. If the fault is covered by our warranty, you will receive a new or repaired equipment in return.

Warranty claims are invalid in case of damage resulting from:

- + misuse or improper handling
- + environmental influences (moisture, heat, electrical surge, dust, etc.)
- + failure to follow the current safety measures for the equipment
- + failure to follow the operating instructions
- + use of force (e. g. hitting, kicking, falling)
- + interventions which were not carried out by one of our authorized service centres
- + unauthorised repair attempts

Proof of Purchase and Serial Number

Please make sure that you are able to provide the appropriate receipt when claiming on your warranty. So that we can clearly identify the model of your equipment, and for the purposes of our quality control, you will need to give the serial number of your equipment, when contacting the service team. Where possible please have your serial number and your customer number ready when you call our service hotline. It will help us to deal with your request swiftly.

If you cannot find the serial number on your fitness equipment, our service team is at your disposal to offer further information.







































Service outside of the Warranty Period

We are also happy to issue an individual cost estimate if there is a problem with your fitness equipment after the warranty has expired, or in cases which do not fall under the terms of the warranty, e. g. normal wear and tear. Please contact our customer service team to find a quick and cost-effective solution to your problem. In such a case you will be responsible for the delivery costs.

Communication

Many problems can be solved just by speaking to us as your specialist supplier. We know how important it is to you as a user of the fitness equipment to have problems solved quickly and simply, so you can enjoy working out with minimal interruption. For that reason, we also want to resolve your queries quickly and in a straightforward manner. Thus, please always keep your customer number and the serial number of the faulty equipment handy.

10 CONTACT

| DE | DK | UK |
|---|---|---|
| <p>TECHNIK</p> <p> +49 4621 4210-900</p> <p> +49 4621 4210-698</p> <p> technik@fitshop.de</p> <p> Öffnungszeiten entnehmen Sie unserer Homepage.</p> <p>SERVICE</p> <p> 0800 20 20277 (kostenlos)</p> <p> 04621 4210 - 0</p> <p> info@fitshop.de</p> <p> Öffnungszeiten entnehmen Sie unserer Homepage: https://stg.fit/statita</p> | <p>TEKNIK OG SERVICE</p> <p> 80 90 16 50</p> <p>+49 4621 4210-945</p> <p> info@fitshop.dk</p> <p> Åbningstider kan findes på hjemmesiden: https://stg.fit/statit7</p> <p>FR</p> <p>TECHNIQUE & SERVICE</p> <p> +33 (0) 189 530984</p> <p>+49 4621 42 10 933</p> <p> info@fitshop.fr</p> <p> Vous trouverez les heures d'ouverture sur notre site Internet: https://stg.fit/statit4</p> | <p>CUSTOMER SUPPORT</p> <p> 00800 2020 2772</p> <p>+494621 4210 944</p> <p> info@fitshop.co.uk</p> <p> You can find the opening hours on our homepage: https://stg.fit/statitc</p> <p>BE</p> <p>TECHNIQUE & SERVICE</p> <p> 02 732 46 77</p> <p>+49 4621 4210 933</p> <p> info@fitshop.be</p> <p> Vous trouverez les heures d'ouverture sur notre site Internet: https://stg.fit/statit8</p> |
| ES | NL | INT |
| <p>TECNOLOGÍA Y SERVICIOS</p> <p> 911 238 029</p> <p> info@fitshop.es</p> <p> Consulta nuestro horario de apertura en la página web: https://stg.fit/statit5</p> | <p>TECHNISCHE DIENST & SERVICE</p> <p> +31 172 619961</p> <p> service@fitshop.nl</p> <p> De openingstijden vindt u op onze homepage: https://stg.fit/statit3</p> | <p>TECHNICAL SUPPORT & SERVICE</p> <p> +49 4621 4210-944</p> <p> service-int@fitshop.de</p> <p> You can find the opening hours on our homepage: https://stg.fit/statita</p> |
| PL | AT | CH |
| <p>DZIAŁ TECHNICZNY I SERWIS</p> <p> 22 307 43 21</p> <p>+49 4621 42 10-948</p> <p> info@fitshop.pl</p> <p> Godziny otwarcia można znaleźć na stronie głównej: https://stg.fit/statit6</p> | <p>TECHNIK & SERVICE</p> <p> 0800 20 20277 (Freecall)</p> <p>+49 4621 42 10-0</p> <p> info@fitshop.at</p> <p> Öffnungszeiten entnehmen Sie unserer Homepage: https://stg.fit/statitb</p> | <p>TECHNIK & SERVICE</p> <p> 0800 202 027</p> <p>+49 4621 42 10-0</p> <p> info@fitshop.ch</p> <p> Öffnungszeiten entnehmen Sie unserer Homepage: https://stg.fit/statit9</p> |

Please find a detailed overview including address and opening hours for all stores of the Fitshop Group in Germany and abroad on the following website:

www.fitshop.com/en/stores

WE LIVE FITNESS

WEBSHOP AND SOCIAL MEDIA


Fitshop is Europe's largest specialist store for home fitness equipment with currently over 70 stores and one of the world's most renowned online mail order companies for fitness equipment. Private customers order via the 25 web shops in the respective national language or have their desired equipment assembled on site. In addition, the company supplies fitness studios, hotels, sports clubs, companies and physio practices with professional equipment for endurance and strength training.

Fitshop offers a wide range of fitness equipment from renowned manufacturers, high-quality in-house developments and comprehensive services, such as a build-up service and sports scientific advice before and after the purchase. The company employs numerous sports scientists, fitness trainers and competitive athletes.

Visit us also on our social media platforms or our blog!

| | |
|--|--|
|  | www.fitshop.co.uk www.fitshop.de/blog |
|--|--|

| | |
|--|--|
|  | www.facebook.com/fitshopgroup |
|--|--|

| | |
|---|--|
|  | www.instagram.com/fitshopgroup/ |
|---|--|

| | |
|--|--|
|  | www.youtube.com/@fitshop_uk |
|--|--|

TAURUS

 cardiostrong

BODYCRAFT

 cardiojump

 DUKEFITNESS

DARWIN

TAURUS®

Taurus IC90 Pro